

Chillers

The ultimate in reliability and flexibility






Daikin chillers offer the ultimate in reliability and flexibility — a reflection of the advanced technology inherent within them. Daikin chillers represent the sure and safe route to a comfortable environment and a process cooling solution that is clean and consistent.

Chillers

Tools and platforms	617	NEW EWAT-B-XRC	669
Daikin, the best partner for your green project	618	NEW EWFT-B-SSC	670
Seasonal efficiency	619	NEW EWFT-B-SRC	671
Chiller modernisation	620	NEW EWFT-B-XSC	672
Reliability and efficiency	622	NEW EWFT-B-XRC	673
Why choose Daikin chillers	626	Air cooled chillers Heat pump	674
Products Overview - Air cooled chillers, condensing units and Multipurpose units	628	EWYA-DV3P	674
Products Overview - Water cooled and condenserless chillers	630	EWYA-DW1P	676
Air cooled chillers cooling only	633	EWYA-DW1P-H	677
EWAA-DV3P	633	EWYA-DV3P-H	678
EWAA-DW1P	634	EWYT-B-SS/SL	682
EWAA-DV3P-H	635	EWYT-B-SR	683
EWAA-DW1P-H	636	EWYT-B-XS/XL	684
EWAT-CZ	637	EWYT-B-XR	685
EWYT-CZ	640	EWYT-CZ I / EWYT-CZ O	686
 NEW EWAD-TZBSD	643	EWYD-BZSS	688
 NEW EWAD-TZSSD	644	EWYD-BZSL	689
 NEW EWAD-TZXSD	645	Multipurpose unit	690
 NEW EWAD-TZXRD	646	EWYD-4ZXSB2	691
 NEW EWAD-TZPSD	647	EWYD-4ZXRB2	692
 NEW EWAD-TZPRD	648	Air cooled condensing unit	694
 NEW EWAH-TZBSD	649	ERAD-E-SS	694
 NEW EWAH-TZSSD	650	ERAD-E-SL	695
 NEW EWAH-TZXSD	651	Water cooled chillers	698
 NEW EWAH-TZRD	652	EW(W)(H)(L)T~Q-A	696
 NEW EWAH-TZPSD	653	EWHQ-G-SS	700
 NEW EWAH-TZPRD	654	EWWQ-G-SS	701
 NEW EWAS-TZBSD	655	EWWQ-L-SS	702
 NEW EWAS-TZSSD	656	EWWD-J-SS	703
 NEW EWAS-TZXSD	657	EWWH-J-SS	704
 NEW EWAS-TZRD	658	EWWS-J-SS	705
 NEW EWAS-TZPSD	659	EWWD-VZ	708
 NEW EWAS-TZPRD	660	EWWH-VZ	712
EWAT-B-SSB/SLB	662	EWWS-VZ	716
EWAT-B-SRB	663	Condenserless chillers	720
EWAT-B-XSB/XLB	664	EWLQ-KC	720
EWAT-B-XRB	665	EWLQ-G-SS	721
 NEW EWAT-B-SSC	666	EWLQ-L-SS	722
 NEW EWAT-B-SRC	667	EWLD-J-SS	723
 NEW EWAT-B-XSC	668	EWLH-J-SS	724
		EWLS-J-SS	725
		EWLD-I-SS	726
		Water cooled centrifugal chillers	728
		EWWD-DZ	728
		EWWH-DZ	730
		EWWS-DZ	732
		DWSC C Series	734
		DWDC C Series	735
		Accessories	736

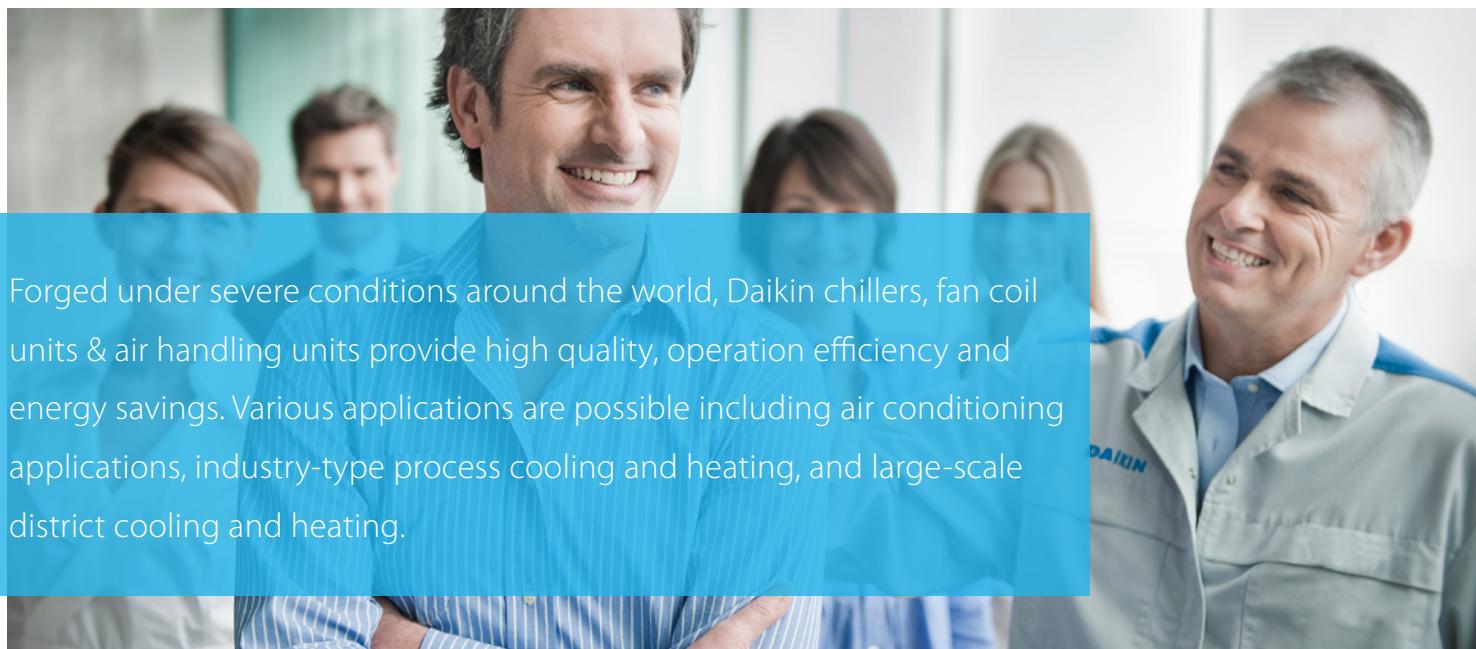

Forged under severe conditions around the world, Daikin chillers, fan coil units & air handling units provide high quality, operation efficiency and energy savings. Various applications are possible including air conditioning applications, industry-type process cooling and heating, and large-scale district cooling and heating.

A partner of choice

Daikin is Europe's leading manufacturer and global n°1 of highly energy-efficient heating, cooling, ventilation and refrigeration solutions for residential, commercial and industrial applications. Daikin is a leader in using technologies that help preserve the environment, such as those that conserve energy and deliver high reliability to its customers. Daikin's flexible applied systems deliver high efficiency for commercial, institutional and industrial buildings.

The comfort of reliability

Nobody is really looking for complexity in business. Because complexity often leads to mistakes, delays or losses. Unfortunately, the world we are all doing business in, is sometimes quite complex. When looking for further business development, we all expand our national and international operations. And that doesn't make things easy.

As a small scale business or multinational company, you deserve the best partners. Partners that can take away the headaches and make you feel comfortable again. With Daikin, you have found such a partner. Because Daikin would like things to be easy ... for you.

Daikin quality

Daikin's much envied quality quite simply stems from the close attention paid to design, production and testing as well as aftersales support. To this end, every component is carefully selected and rigorously tested to verify its contribution to product quality and reliability.

Staff who understands you

Daikin and its staff of devoted engineers, consultants and analysts are ready to assist you on a daily basis in setting up nationwide or international agreements, providing advice on equipment selection and monitoring regulations. Our goal is to help you carry out your plans with confidence, using custom-designed systems that meet your needs (for comfort, performance levels, support and service).

Daikin Applied Development Center

Opened in May 2009, the Daikin Applied Development Center is the world's most advanced facility for heating, ventilation and air conditioning (HVAC) research and development. The purpose of the center is to develop and test advanced chiller, compressor and other HVAC technologies to reduce energy consumption and, ultimately the carbon footprint of the buildings where they will be used.

Find out more about the Daikin Applied Europe in the video below:



You Tube
[www.youtube.com/
DaikinEurope](http://www.youtube.com/DaikinEurope)



Witness Testing Chiller testing facilities Daikin Applied Europe

We are industry leaders in air cooled and water cooled chiller technologies. Our performance in each condition can be shared through witness tests. During witness testing even the toughest design conditions can be simulated. Customers and consultants can appreciate product performance before its delivery, ensuring "peace of mind" chiller integration in the whole project.

We have specific competencies and state of the art testing facilities to pursue these goals.

Find out more about our testing facilities in the video below:



You Tube
[www.youtube.com/
DaikinEurope](http://www.youtube.com/DaikinEurope)



Tools and platforms

Have a question, looking for specific software applications, need detailed product information or looking for any other marketing tools? This overview gives you an idea of what we can offer.

Selection software

Daikin Europe offers you a variety of building modelling, selection, simulation and quotation software tools to support your sales.

Web-based chiller selection software


A user-friendly interface allows users to quickly create new projects, open and change existing projects or simply do a quick selection.

Technical selection reports can be printed or downloaded in several formats.

To make life easier, the tool is accessible everywhere, via any device. No matter where you are, projects can be consulted.

Create now a new account on:

› <http://tools.daikinapplied.eu/>

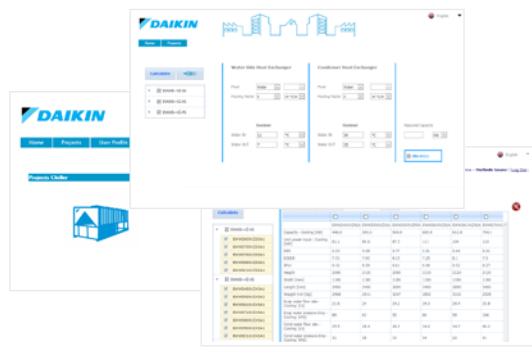

ASTRA Web

- › Quick AHU selection that will save you precious time, drastically reducing selection time through the new software interface.
- › Very competitive solution available within the Wizard thanks to pre-uploaded parameters.
- › High selection quality, thanks to the intelligence embedded within the software core.

Online support

Business portal

Experience our new extranet that thinks with you


- › Find information in seconds via a powerful search
- › Customize the options so you see only info relevant for you
- › Access via mobile or desktop via my.daikin.eu

Daikin on Site

A new remote monitoring and control for chillers and air handling units has been developed by Daikin to give peace of mind to the end-customer.

Using this new tool results in optimum use and costs over the system's entire lifetime:

- › enhanced control and measuring
- › monitors the system
- › reduces risks at the earliest possible moment
- › keeps the system running as it was intended to

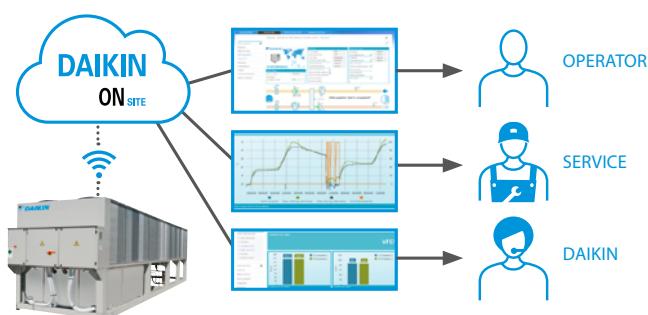

BREEAM®

Daikin, the best partner for your green project

From 2015 onwards the majority of new building projects in Europe are expected to be green.

93% percent of developers & investors consider green certification important

BREEAM and LEED green building programmes are the two most important sustainable building certificates in Europe, covering more than 75% of the total sustainable-building certificate market.

Property developers are setting high standards

- › Aiming for a BREEAM Excellent or LEED Gold target is no longer rare
- › The real challenge? Achieving these targets while staying within budget

HVAC-R systems play an important role

- › Within the total green assessment & investment cost
- › They require the alignment of many different parties

BREEAM is a registered trademark of BRE (the Building Research Establishment Ltd. Community Trade Mark E5778551). The BREEAM marks, logos and symbols are the Copyright of BRE and are reproduced by permission.

It is essential to choose an HVAC-R partner with the knowledge and portfolio to achieve your BREEAM or LEED objectives, and other green needs.

Daikin has successfully participated in many green and sustainable projects. Helping builders achieve BREEAM Excellent, LEED Gold, NZEB and similar certificates has become one of our specialities.



We have a team of BREEAM accredited professionals (APs) at your service!

- › Over 17 APs across Europe
- › Assisting you to achieve your BREEAM certificate



You get maximum support in scoring BREEAM credits & LEED points:

- › Daikin Total HVAC-R Solutions
- › High seasonal efficiency technologies
- › Smart energy management with intelligent network
- › Boost your end score with innovative products & technologies

Maximise your BREEAM and LEED green building programme score with Daikin solutions

› Manage up to 70% of your energy consumption with the Daikin Total Solution

› Top seasonal efficiency

Both BREEAM and LEED green building programmes put the strongest focus on energy efficiency. This is exactly why it's so important to choose Daikin.

› Smart air conditioning management with Intelligent Network

To drastically reduce your energy consumption and CO₂ emissions it's not enough to simply make your equipment more efficient.


Seasonal efficiency,

Smart use of energy

Challenging 20-20-20 environmental targets

The European Commission has set challenging targets for improving energy efficiency in the EU. These so-called 20-20-20 targets aim at a 20% reduction in CO₂ emissions, 20% share of renewable energy and a 20% reduction in the use of primary energy, all by the year 2020. To realise these objectives, Europe issued the Eco-Design Directive [2009/125/EC]. This sets minimum efficiency requirements for energy related products.

European action plan 20-20-20

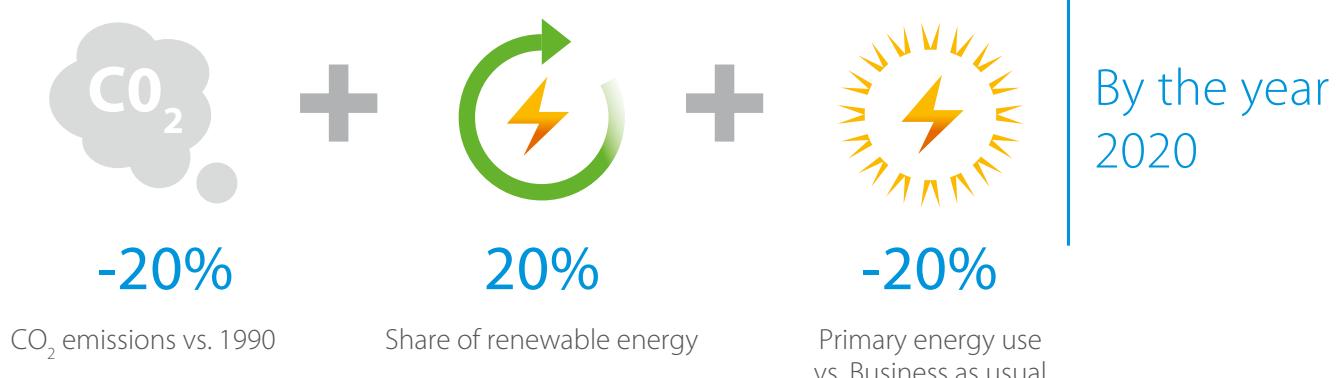

Applied systems: products in scope

Since 26 September 2015, heat generators for space heating (LOT 1) also need to comply to these 20-20-20 targets. For the applied systems market it means that all heat pumps below 400 kW need to comply to minimum efficiency requirements. Heat pumps below 70 kW must be marked with a product energy label.

Our service

Daikin helps its partners to meet their obligations regarding the Ecodesign Directive and energy labelling. Labels, product and technical fiches for each individual product are available as downloads at any time from the Energy Label Generator at https://www.daikin.eu/en_us/about/daike-innovations/seasonal-efficiency.html.

Chiller modernisation

Be smart – replace components, not systems

Our concept

Even if the R-22 chiller has been maintained well and is still in good condition, R-22 is no longer allowed to be used. That's why Daikin offers chiller modernisation packages. Not only is the chiller made compliant with the latest legislation, the technology upgrade also revives your system, increasing reliability and efficiency.

Main benefits

- › Convert R-22 to be compliant with legislation
- › Limit capital
- › Save money for future equipment thanks to the chiller's longer lifetime, increased reliability, and improved maintenance efficiency
- › Enhance energy efficiency up to +20% ESEER by manufacturer pre-engineered upgrade

Benefits for budget and risk management

- › No chiller removal
- › No water pipe work
- › No electrical modifications
- › Low logistic expenses (transport, cranage, permissions ...)
- › Quick delivery
- › Government-sponsored subsidies may be available




Controller box
upgrade



Fact: R-22 has been banned in Europe*

If your equipment is more than 15 years old, it probably still uses R-22 refrigerant. Since 31 December 2014 repairs to R-22 systems are prohibited, possibly resulting in unexpected downtime. Keep your business running at all times with Daikin replacement technology.

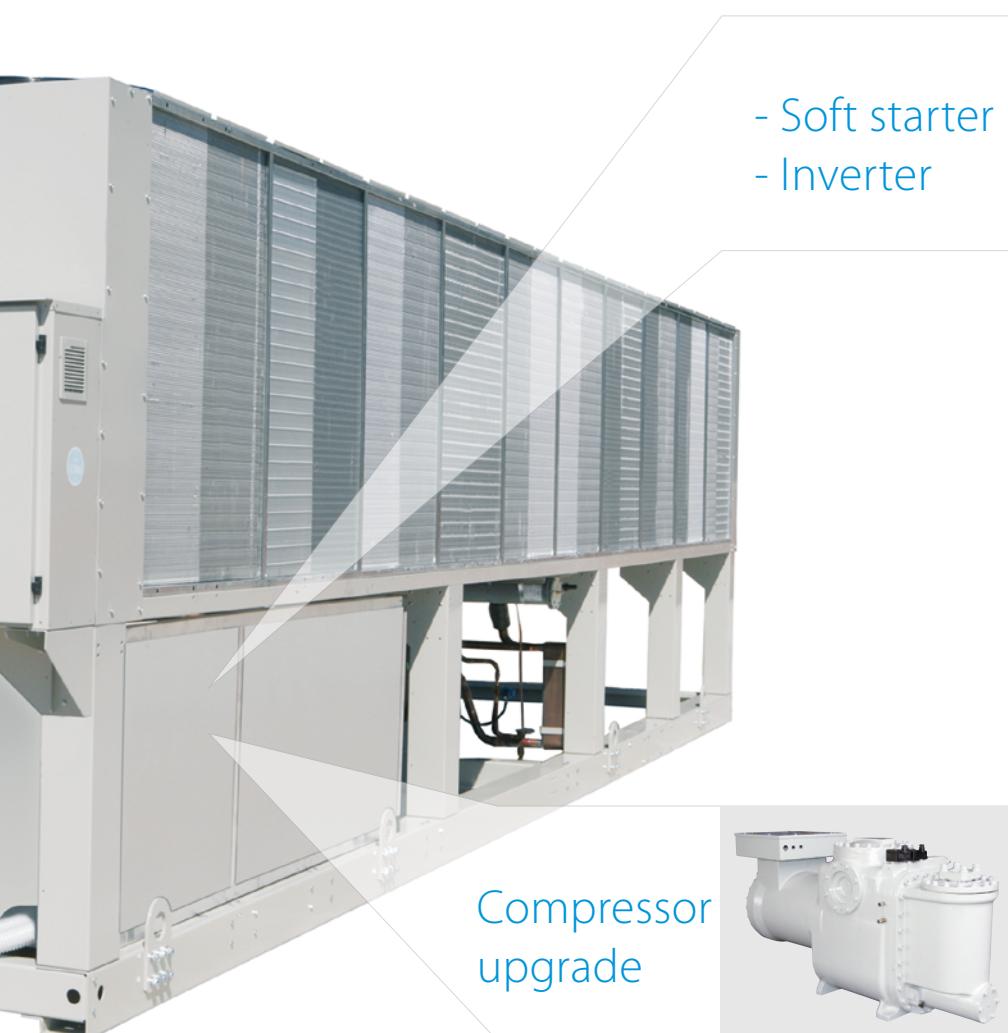

Day-to-day reliability and efficiency


Inhouse development and manufacturing of compressors

Unlike many other air conditioning manufacturers, Daikin manufactures its own compressors.

This is important because the compressor is the very heart of the air conditioning system, increasing the pressure and temperature of the refrigerant vapour, effectively concentrating the heat as it passes around the system. Daikin has always been at the forefront of developing compressor technology and now offers a comprehensive range of swing, scroll, screw and centrifugal compressors. As a result, inverter compressor control is applied throughout our product range, delivering enhanced comfort and system efficiency.



Swing compressor

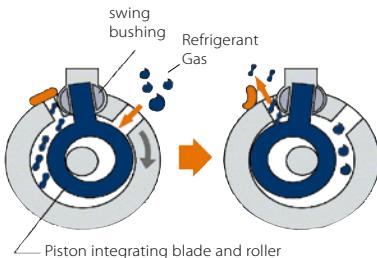

The mini chiller series EWAQ005-007ADVP & EWYQ005-007ADVP are equipped with a swing inverter compressor. This innovative design by Daikin has fewer moving parts allowing a smoother, more reliable operation with low vibration and low noise levels. The high-efficiency motor reduces energy consumption, resulting in energy cost savings.



Scroll compressor for controlled capacity


Being compact, the Daikin scroll compressor is used with R-407C and R-410A to provide constant reliability and high efficiency throughout its service life. Designed for small and medium capacities, the scroll compressors are used with air cooled and water cooled chillers.

Characteristics:


- › Compact, simple yet robust design
- › Absence of valves and oscillating connecting mechanisms providing maximum reliability
- › Constant compression guaranteeing low energy consumption
- › Increased compression efficiency thanks to the absence of volumetric re-expansion
- › Low sound level
- › Low starting current



Innovative frictionless centrifugal compressor

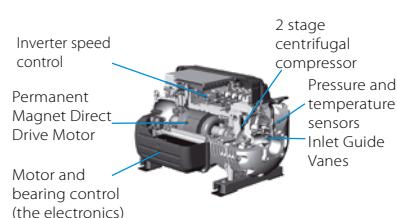

The innovative frictionless centrifugal compressor has an integrated VFD, as well as magnetic bearings, and delivers high levels of unit efficiency and reliability. The compressor's only moving part - the rotor shaft and impellers - are powered by the permanent magnetic direct-drive motor and kept levitated by a digitally controlled magnetic bearing system. This reduction in moving parts significantly increases unit reliability and reduces maintenance costs. As the condensing temperature and/or cooling load reduces, the speed of rotation reduces and movable inlet guide vanes, activated by the step motor, redirect gas flow into the first stage impeller once the compressor has reached its minimum speed. This delivers increased efficiency and cost savings during part-load operations.

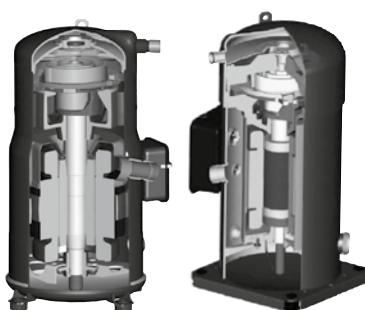


Whatever the requirements of the customer - large systems requiring constant capacity or small systems for flexibility - Daikin always provides a reliable and efficient solution.



The single-screw stepless compressor for high capacity

At the heart of the larger Daikin chillers is a semi hermetic single screw compressor, designed, tested and manufactured in Daikin's own factories, in order to meet the highest capacity, performance and maintenance specifications. This compressor has been especially developed for operation with R-410A or R-134a refrigerants, guaranteeing unequalled reliability and many years of efficient operation. The bearing life is 100,000hrs with inspection and maintenance intervals every 40,000hrs.

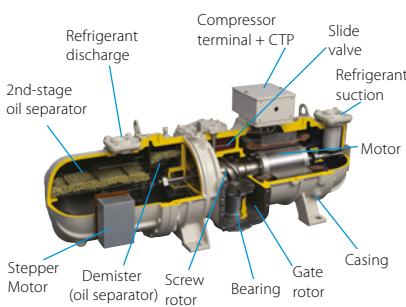

Characteristics:

- › Optimal performance through stepless capacity control chilled water temperatures. The unit capacity is infinitely variable from 30 - 100% on single circuit units and 15 -100 % on dual circuit units.
- › Compact, simple yet robust construction.
- › Using a main single screw and two gate rotors, axial and radial forces are balanced, thanks to the symmetrical compression guaranteeing low bearing loads.
- › Gate rotors made of polymer material result in closer tolerances with the main screw and reduced friction greatly improves compressor efficiency and lifetime.
- › No oil pump necessary - lubrication based on the differential pressure principle.
- › Easy access to both compressor and safety devices.
- › Star-Delta starter with low starting current as standard.




Screw compressor with integrated inverter

Characteristics:

- › Compressor and inverter fully designed by Daikin
- › Inverter integral to the compressor body
- › Inverter refrigerant cooled
- › VVR = Variable Volume Ratio for optimized efficiency
- › Enlarged discharge port and suction side for reduced refrigerant pressure drop
- › New optimized compressor motors

Main benefits:

- › Better ESEER & EER values
- › 30% more compact than single-screw compressor
- › Rapid payback time
- › Silent operations
- › Optimal comfort levels

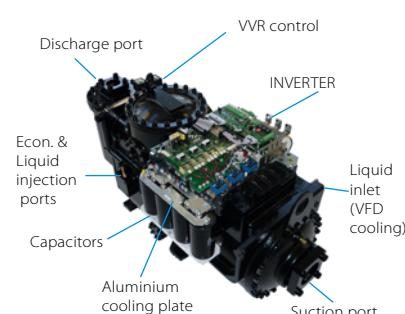


Chillers



HOTEL
APPLICATION



DATA CENTER
APPLICATION

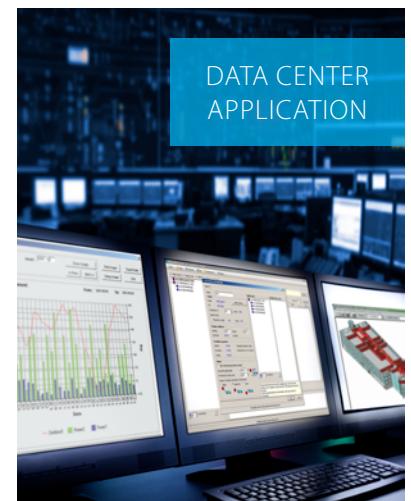

PROCESS COOLING
APPLICATION





Daikin chillers

Why choose Daikin chillers?

Daikin chillers are the perfect bridge between project requirements and customer satisfaction.

From the smallest chillers to the very largest, our quality control and attention detail is absolute.

Our systems have the **most advanced technologies**, deliver **the highest energy efficiencies** and **lowest running costs**, and are the gold standard for reliability and performance.

The widest and most flexible chiller portfolio

- › From the smallest mini chiller for residential use to the largest chiller for district cooling
- › Tailor made solutions based on the most advanced technologies
- › Wide range of options and accessories

Worldwide experience in chiller design and manufacturing

- › World's most advanced facilities for air conditioning research and development: the Applied Development Center in Minneapolis, Minnesota
- › Inhouse development and manufacturing of chiller main components (compressors, fans, condenser coils, software, etc...)
- › Chillers produced in European factories, in Milan and Ostend

The highest efficiency for every installation

- › Inverter technology over the whole capacity range
- › The lowest total cost of ownership and fast payback time

Quality and reliability

- › Daikin's integrated zero defect policy ensures quality of components and finished products
- › Each Daikin chiller is factory run-tested and subjected to quality audit before shipment

Benefits for installers

- › Plug & play solutions
- › Maximum serviceability
- › Ideal solutions for retrofit projects

Benefits for consultants

- › Energy efficient solutions without compromising on reliability and performance
- › Latest technology embedded in all our products

Benefits for end users

- › Remarkable savings on running costs
- › Easy to customise the chiller to your application, environment and need thanks to more than 150 different options.

Web-based chiller selection software

A user-friendly interface allows users to quickly create new projects, open and change existing projects or simply do a quick selection.

Technical selection reports can be printed or downloaded in several formats.

To make life easier, the tool is accessible everywhere, via any device. No matter where you are, projects can be consulted.

Create now a new account on:
<http://tools.daikinapplied.eu/>

	CWYD01/02/03	CWYD04/05/06	CWYD07/08/09	CWYD01/02/03	CWYD04/05/06	CWYD07/08/09
Capacity - Cooling [kW]	448.8	508.5	504.9	699.9	612.8	704.1
Input power input + cooling [kW]	81.2	89.6	87.5	111	109	123
IEER	5.53	5.58	5.77	5.51	5.64	5.31
ESER	7.31	7.32	8.13	7.23	8.1	7.3
SPL	4.4	4.4	4.4	4.4	4.4	4.4
Height	2195	2120	2090	2129	2123	2129
Width [mm]	1180	1180	1180	1180	1180	1180
Length [mm]	3460	3460	3690	3460	3460	3460
Weight [kg]	2968	2511	3247	2802	2112	2528
Evap water flow rate - Cooling [l/s]	21.8	24	24.2	29.3	29.6	33.8
Evap water pressure drop - Cooling [kPa]	89	82	85	89	90	106
Evap water flow rate - Cond. [l/s]	23.5	28.4	28.5	34.8	34.7	40.2
Cond. water pressure drop - Cooling [kPa]	31	28	15	34	22	41



401 Chiller and air side equipment
Product portfolio



416 Modular L
Product profile



445 EWYD-4Z Multipurpose
Product profile



404 EWAD-TZ B
Product profile



418 Chiller series
Product profile

Supporting tools

Business portal

- › Experience our extranet that thinks with you at my.daikin.eu
- › Find information in seconds via a powerful search
- › Customise the options so you see only info relevant for you
- › Access via mobile device or desktop

Website

- › www.daikin.eu/en_us/product-group/chillers.html
- › Explore our product range
- › Find our solutions for applications
- › Get more commercial details on our flagship products

Literature


- › Download or consult our literature for our professional network and end-customers

Products overview

	Refrigerant type *	Refrigerant circuits	Inverter	Free cooling	Compressor			Water heat exchanger	Efficiency version			Sound version		
					Swing	Scroll	Screw		Plate **	Single pass shell and tube	Blue	Silver	Gold	Platinum
Cooling only														
EWAA-DV3P		R-32	1											
EWAA-DV3P-H/ DW1P-H		R-32	1											
EWAT~CZN/P/H		R-32	1-2											
EWAT-B B (Single-V Layout)		R-32	1-2											
EWAT-B C		R32	1-2											
EWFT-B C		R32	1-2											
EWAH-TZ D		R32	1-2											
EWFH-TZ D		R1234ze(E)	1-2											
EWAS-TZ D		R1234ze(E)	1-2											
EWFS-TZ D		R513A	1-2											
EWAD-TZ D		R513A	1-2											
EWFD-TZ D		R134a	1-2											
Heat pump														
EWYA-DV3P		R-32	1											
EWYA-DV3P-H/ DW1P-H		R-32	1											
EWYT~CZN/P/H		R-32	1-2											
EWYT-B		R-32	1-2											
EWYT-CZI EWYT-CZO		R-32	1-2											
EWYD-BZ		R-134a	2-3											
Condensing unit														
ERAD-E-		R-134a	1											
Multipurpose unit														
EWYD-4Z		R-134a	2											

* (GWP): R-410A (2,087.5), R-134a (1,430) - ** BPHE: Brazed plate heat exchanger

Air cooled chillers, condensing units and Multipurpose units

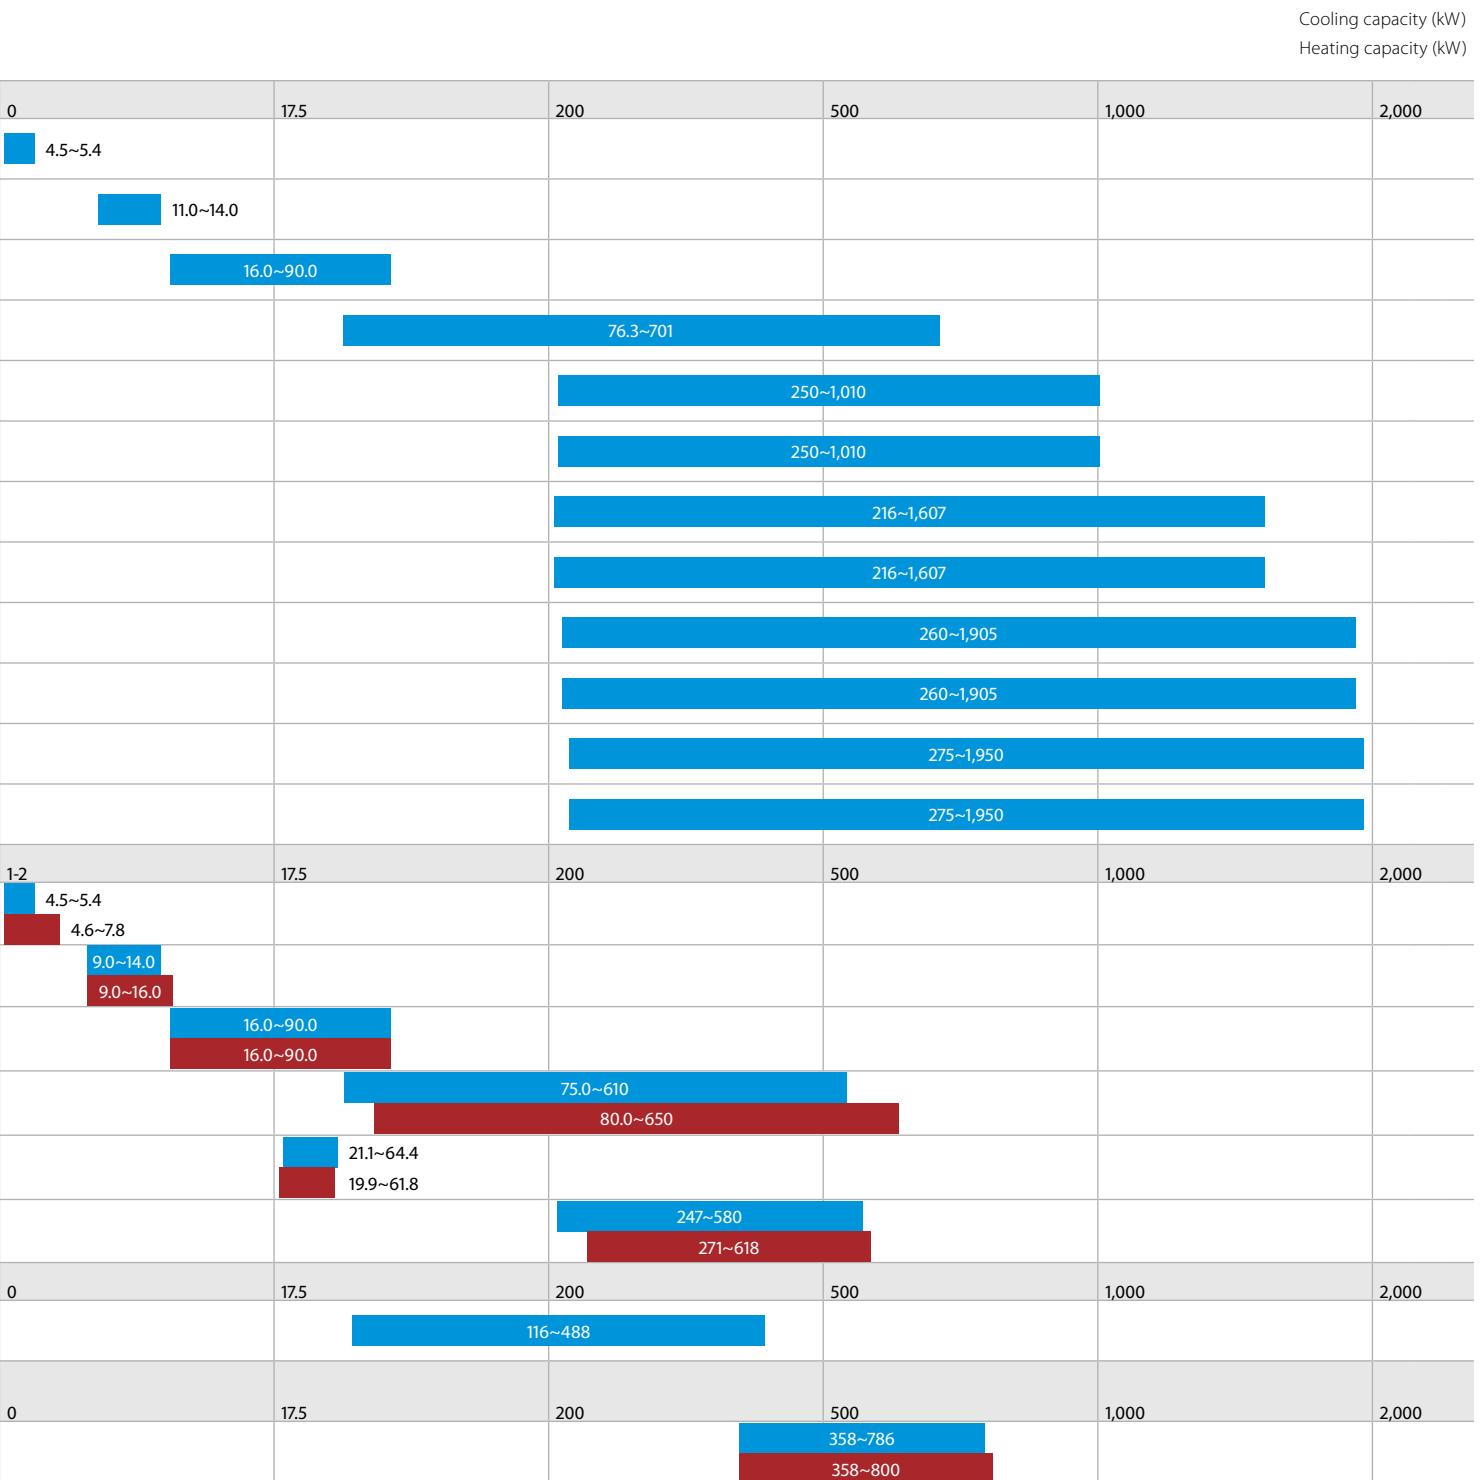



Products overview

	Refrigerant Type *	Refrigerant circuits	Inverter	Compressor			Water heat exchanger			Efficiency version			Sound version
				Scroll	Screw	Centrifugal	Plate **	Single pass shell and tube	Shell and tube	Standard	High	Premium	
Water cooled chillers (Cooling only and Heat Pump)													
EWQ-KCW1N		R-410a	1-2		●			●			●		●
EWHQ~G-		R-410A	1		●			●			●		●
EWWQ~G-		R-410A	1		●			●			●		●
EWWQ~L-		R-410A	2		●			●			●		●
EWWD~J-		R-134a	1			●		●			●		●
EWHH-J-		R1234ze	1			●		●			●		●
EWWS-J-		R-513A	1			●		●			●		●
EWWD-VZ		R-134a	1-2	●		●				Flooded	●	●	●
EWHH-VZ		R-1234ze(E)	1-2	●		●				Flooded	●	●	●
EWWS-VZ		R-513A	1-2	●		●				Flooded	●	●	●
Condenserless chillers													
EWLQ-KCW1N		R-410A	1-2		●			●			●		●
EWLQ~G-		R-410A	1		●			●			●		●
EWLQ~L-		R-410A	2		●			●			●		●
EWLD~J-		R-134a	1			●		●			●		●
EWLD~I-		R-134a	1-2-3			●			●		●		●
EWLH-J-		R1234ze	1			●		●			●		●
EWLS-J-		R-513A	1			●		●			●		●
Water cooled centrifugal chillers													
EWWD-DZ		R-134a	1					●			●		●
EWHH-DZ		R-1234ze(E)	1					●			●		●
DWDC B		R-134a and R513A	1	optional				●			●		●
DWSC C / DWDC C		R-134a, R-513A and R-1234ze	1	optional				●			●		●
6,000 RT CENTRIFUGAL		R-134a	2 per chiller					●		Flooded			●

*(GWP): R-410A (2,087.5), R-134a (1,430), R-407C (1,773.9) - ** BPHE: Brazed plate heat exchanger

Cooling capacity (kW)
Heating capacity (kW)

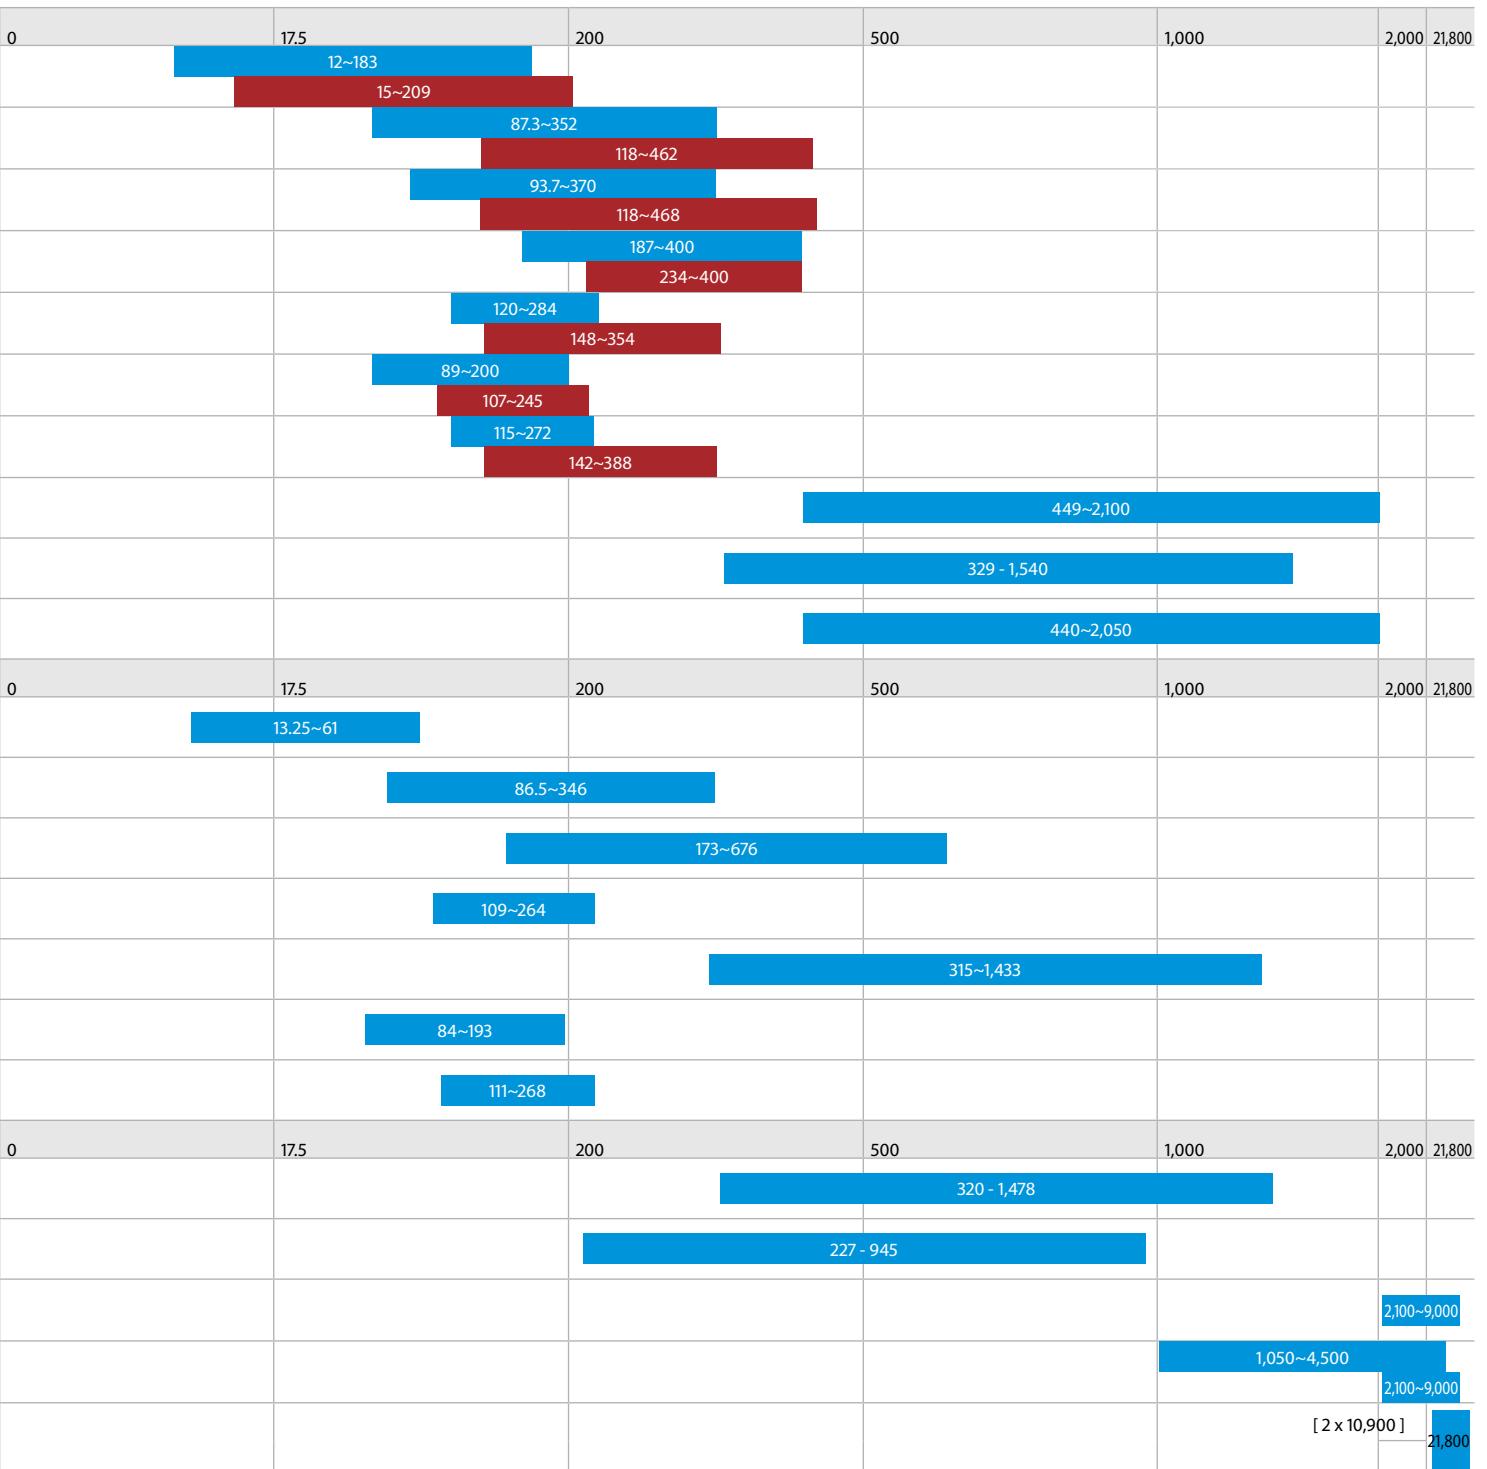

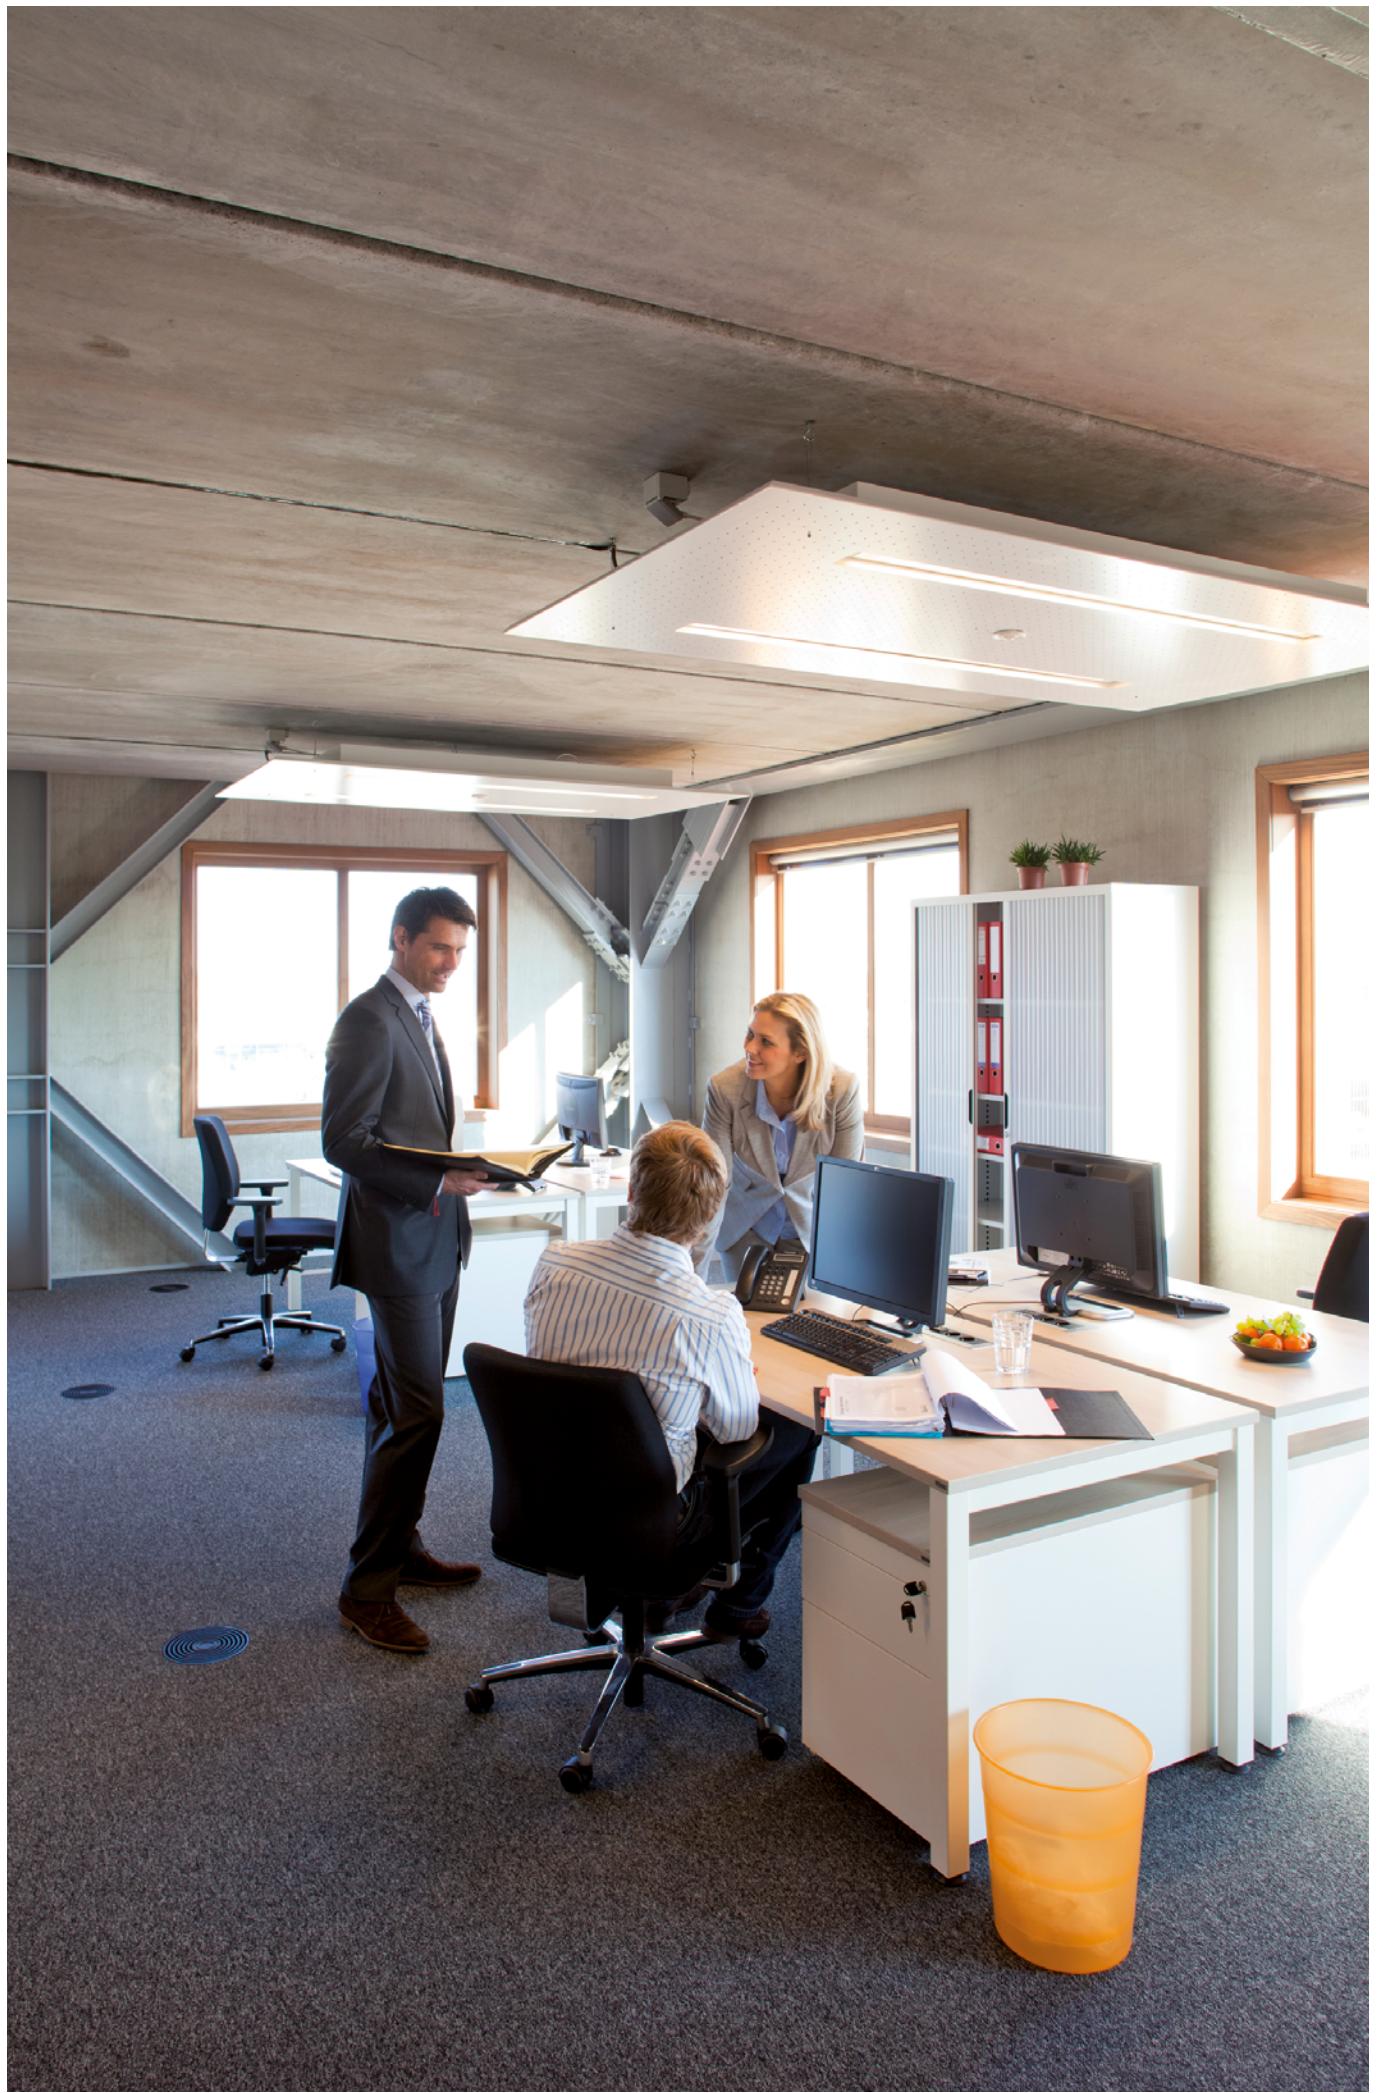

Air cooled mini inverter chiller

- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- › Inverter chiller
- › Hermetically sealed swing inverter compressor
- › New casing for the outdoor units
- › Separate MMI-2 controller for indoor installation



More details and final information can be found by scanning or clicking the QR codes.



EWAA-DV3P

Cooling Only			EWAA-D	004DV3P	006DV3P	008DV3P	011DV3P	014DV3P	016DV3P
Space cooling	A Condition Pdc 35°C	kW		-			11.6	12.8	14.0
	ηs,c	%		-			229	226	221
SEER				-			5.79(6)	5.71(6)	5.59(6)
Cooling capacity	Nom.	kW	4.86(1)/4.52(2)	5.83(1)/5.09(2)	6.18(1)/5.44(2)	11.6(4)/11.5(5)	12.8(4)/12.7(5)	14.0(4)/15.3(5)	
Power input	Cooling Nom.	kW	0.820(1)/1.36(2)	1.08(1)/1.55(2)	1.19(1)/1.73(2)	3.56(4)/2.17(5)	4.06(4)/2.51(5)	4.58(4)/3.24(5)	
	Heating Nom.	kW	0.840(1)/1.26(2)	1.24(1)/1.69(2)	1.63(1)/2.23(2)	-	-	-	
Capacity control	Method					Variable (inverter)			
EER			5.91(1)/3.32(2)	5.40(1)/3.28(2)	5.19(1)/3.14(2)	3.26(4)/5.31(5)	3.16(4)/5.04(5)	3.06(4)/4.74(5)	
Dimensions	Unit	Height	mm	770			870		
		Width	mm	1,250			1,380		
		Depth	mm	362			460		
Weight	Unit	kg		88.0			147		
Water heat exchanger	Type				Plate heat exchanger				
	Water volume	l		1			2		
Air heat exchanger	Type			-	High efficiency fin and tube type with integral subcooler				
Compressor	Type			Hermetically sealed swing compressor	Hermetically sealed swing inverter compressor				
	Quantity				1				
Fan	Type				Propeller fan				
	Quantity				1				
	Air flow rate	Cooling Nom.	m³/min		-		70	85	
Sound power level	Cooling	Nom.	dBA	61.0(1)	62.0(1)		67.0	69.0	
Sound pressure level	Cooling	Nom.	dBA	48.0(1)	49.0(1)	50.0(1)	47.7	50.8	51.0
Operation range	Air side	Cooling	Min.~Max.	°CDB	10(3)~43			10~43	
Refrigerant	Type/GWP					R-32/675.0			
	Charge		kg		1.35			-	
	Control				-		Electronic expansion valve		
	Circuits	Quantity			-		1		
Refrigerant charge	Per circuit		kg		-		3.80		
Unit	Running current	Max	A		-		30.8		
Power supply	Phase/Frequency/Voltage		Hz/V	1~/50 /230	+/-10%		1~/50 /230		

(1) Condition 1: cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) | (2) Condition 2: cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C) | (3) For more details, see operation range drawing | (4) Cooling: EW 12°C; LW 7°C; ambient conditions: 35°CDB | (5) Cooling: EW 23°C; LW 18°C; ambient conditions: 35°CDB | (6) According to EN14825 | Condition: Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) | Condition: Ta DB/WB 7°C/6°C - LWC 45°C (DT=5°C) | Depends on operation mode, refer to installation manual.

Air cooled mini inverter chiller

- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- › Inverter chiller
- › Hermetically sealed swing inverter compressor
- › New casing for the outdoor units
- › Separate MMI-2 controller for indoor installation



EWAA-EWYA-D_R

More details and final information can be found by scanning or clicking the QR codes.



EWAA-DW1P

Cooling Only			EWAA	011DW1P	014DW1P	016DW1P
Space cooling	A Condition Pdc 35°C	kW		11.6	12.8	14.0
	ηs,c	%		229	226	221
SEER				5.79(3)	5.71(3)	5.59(3)
Cooling capacity	Nom.	kW		11.6(1)/11.5(2)	12.8(1)/12.7(2)	14.0(1)/15.3(2)
Power input	Cooling Nom.	kW		3.56(1)/2.17(2)	4.06(1)/2.51(2)	4.58(1)/3.24(2)
Capacity control	Method			Variable (inverter)		
EER				3.26(1)/5.31(2)	3.16(1)/5.04(2)	3.06(1)/4.74(2)
Dimensions	Unit	Height	mm		870	
		Width	mm		1,380	
		Depth	mm		460	
Weight	Unit	kg			147	
Water heat exchanger	Type			Plate heat exchanger		
	Water volume	l			2	
Air heat exchanger	Type			High efficiency fin and tube type with integral subcooler		
Compressor	Type			Hermetically sealed swing inverter compressor		
	Quantity				1	
Fan	Type			Propeller fan		
	Quantity				1	
	Air flow rate	Cooling Nom.	m³/min	70	85	
Sound power level	Cooling Nom.	dBA		67.0	69.0	
Sound pressure level	Cooling Nom.	dBA		47.7	50.8	51.0
Operation range	Air side Cooling	Min.~Max.	°CDB		10~43	
	Water side Cooling	Min.~Max.	°CDB		5~22	
Refrigerant	Type/GWP			R-32/675.0		
	Control			Electronic expansion valve		
	Circuits	Quantity			1	
Refrigerant charge	Per circuit	kg			3.80	
		TCO2Eq			2.6	
Unit	Running Max current	A			14.0	
Power supply	Phase/Frequency/Voltage	Hz/V		3~/50/400		

(1) Cooling: EW 12°C; LW 7°C; ambient conditions: 35°CDB | (2) Cooling: EW 23°C; LW 18°C; ambient conditions: 35°CDB | (3) According to EN14825 | Condition: Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) | Condition: Ta DB/WB 7°C/6°C - LWC 45°C (DT=5°C) | Depends on operation mode, refer to installation manual. | For more details, see operation range drawing

Air cooled mini inverter chiller

- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- › Inverter chiller
- › Hermetically sealed swing inverter compressor
- › New casing for the outdoor units
- › Separate MMI-2 controller for indoor installation



More details and final information can be found by scanning or clicking the QR codes.



EWAA-DV3P-H

Cooling Only			EWAA-D	004DV3P-H	006DV3P-H	008DV3P-H	011DV3P-H-	014DV3P-H-	016DV3P-H-
Space cooling	A Condition Pdc 35°C	kW		-			11.6	12.8	14.0
	ηs,c	%		-			229	226	221
SEER				-			5.79(6)	5.71(6)	5.59(6)
Cooling capacity	Nom.	kW	4.86(1)/4.52(2)	5.83(1)/5.09(2)	6.18(1)/5.44(2)	11.6(4)/11.5(5)	12.8(4)/12.7(5)	14.0(4)/15.3(5)	
Power input	Cooling Nom.	kW	0.820(1)/1.36(2)	1.08(1)/1.55(2)	1.19(1)/1.73(2)	3.56(4)/2.17(5)	4.06(4)/2.51(5)	4.58(4)/3.24(5)	
	Heating Nom.	kW	0.840(1)/1.26(2)	1.24(1)/1.69(2)	1.63(1)/2.23(2)	-	-	-	
Capacity control	Method					Variable (inverter)			
EER			5.91(1)/3.32(2)	5.40(1)/3.28(2)	5.19(1)/3.14(2)	3.26(4)/5.31(5)	3.16(4)/5.04(5)	3.06(4)/4.74(5)	
Dimensions	Unit	Height	mm	770			870		
		Width	mm	1,250			1,380		
		Depth	mm	362			460		
Weight	Unit	kg		88.0			147		
Water heat exchanger	Type				Plate heat exchanger				
	Water volume	l		1			2		
Air heat exchanger	Type			-	High efficiency fin and tube type with integral subcooler				
Compressor	Type			Hermetically sealed swing compressor	Hermetically sealed swing inverter compressor				
	Quantity				1				
Fan	Type				Propeller fan				
	Quantity				1				
	Air flow rate	Cooling Nom.	m³/min		-		70	85	
Sound power level	Cooling	Nom.	dBA	61.0(1)	62.0(1)		67.0	69.0	
Sound pressure level	Cooling	Nom.	dBA	48.0(1)	49.0(1)	50.0(1)	47.7	50.8	51.0
Operation range	Air side	Cooling Min.~Max.	°CDB	10(3)~43			10~43		
Refrigerant	Type/GWP				R-32/675.0				
	Charge	kg		1.35			-		
	Control			-		Electronic expansion valve			
	Circuits	Quantity		-		1			
Refrigerant charge	Per circuit	kg		-			3.80		
Unit	Running Max current	A		-			30.8		
Power supply	Phase/Frequency/Voltage	Hz/V		1~/50 /230 +/-10%			1~/50 /230		

(1) Condition 1: cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) | (2) Condition 2: cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C) | (3) For more details, see operation range drawing | (4) Cooling: EW 12°C; LW 7°C; ambient conditions: 35°CDB | (5) Cooling: EW 23°C; LW 18°C; ambient conditions: 35°CDB | (6) According to EN14825 | Condition: Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) | Condition: Ta DB/WB 7°C/6°C - LWC 45°C (DT=5°C) | Depends on operation mode, refer to installation manual.

Air cooled mini inverter chiller

- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- › Inverter chiller
- › Hermetically sealed swing inverter compressor
- › New casing for the outdoor units
- › Separate MMI-2 controller for indoor installation



More details and final information can be found by scanning or clicking the QR codes.



EWAA-DW1P-H

Cooling Only			EWAA	011DW1P-H-	014DW1P-H-	016DW1P-H-
Space cooling	A Condition Pdc 35°C	kW		11.6	12.8	14.0
	ηs,c	%		229	226	221
SEER				5.79(3)	5.71(3)	5.59(3)
Cooling capacity	Nom.	kW		11.6(1)/11.5(2)	12.8(1)/12.7(2)	14.0(1)/15.3(2)
Power input	Cooling Nom.	kW		3.56(1)/2.17(2)	4.06(1)/2.51(2)	4.58(1)/3.24(2)
Capacity control	Method			Variable (inverter)		
EER				3.26 (1)/5.31 (2)	3.16 (1)/5.04 (2)	3.06 (1)/4.74 (2)
Dimensions	Unit	Height	mm		870	
		Width	mm		1,380	
		Depth	mm		460	
Weight	Unit	kg			147	
Water heat exchanger	Type			Plate heat exchanger		
	Water volume	l			2	
Air heat exchanger	Type			High efficiency fin and tube type with integral subcooler		
Compressor	Type			Hermetically sealed swing inverter compressor		
	Quantity				1	
Fan	Type			Propeller fan		
	Quantity				1	
	Air flow rate	Cooling Nom.	m³/min	70		85
Sound power level	Cooling Nom.	dBA		67.0		69.0
Sound pressure level	Cooling Nom.	dBA		47.7	50.8	51.0
Operation range	Air side Cooling	Min.~Max.	°CDB		10~43	
	Water side Cooling	Min.~Max.	°CDB		5~22	
Refrigerant	Type/GWP			R-32/675.0		
	Control			Electronic expansion valve		
	Circuits	Quantity			1	
Refrigerant charge	Per circuit	kg			3.80	
		TCO2eq			2.6	
Unit	Running Max current	A			14.0	
Power supply	Phase/Frequency/Voltage	Hz/V		3~/50 /400		

(1) Cooling: EW 12°C; LW 7°C; ambient conditions: 35°CDB | (2) Cooling: EW 23°C; LW 18°C; ambient conditions: 35°CDB | (3) According to EN14825 | Condition: Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) | Condition: Ta DB/WB 7°C/6°C - LWC 45°C (DT=5°C) | Depends on operation mode, refer to installation manual. | For more details, see operation range drawing

Air cooled scroll inverter chiller

- › Inverter chiller
- › High part load efficiency for low running cost
- › Minimal starting currents
- › No buffertank required for standard applications
- › Daikin scroll compressor
- › Wide operation range
- › Integrated hydronic module on request



More details and final information
can be found by scanning or
clicking the QR codes.



EWAT-CZN

Cooling Only			EWAT	016CZN-A1	021CZN-A1	025CZN-A1	032CZN-A1	040CZN-A1	040CZN-A2	050CZN-A2	064CZN-A2	090CZN-A2
Space cooling	A Condition Pdc 35°C	kW	15.9	20.9	25.6	32.4	39.6	41.4	50.8	64.0	88.3	
	ηs,c	%		197		200	205	201	213	210	205	198
SEER				5.00		5.06	5.21	5.09	5.41	5.33	5.21	5.03
Cooling capacity	Nom.	kW	15.9	20.9	25.6	32.4	39.6	41.4	50.8	64.0	88.3	
Power input	Cooling Nom.	kW	5.50	6.60	8.50	10.3	13.4	13.2	17.0	21.8	31.0	
Capacity control	Method						Inverter controlled					
	Minimum capacity	%	18	14	12	19	15	14	12	15	14	
EER			2.90	3.16	3.00	3.13	2.95	3.12	2.98	2.93	2.84	
IPLV			5.83	6.29	6.05	6.25	5.87	6.37	5.92	5.88	5.61	
Dimensions	Unit	Height	mm				1,878					
		Width	mm		1,152		1,752		2,306	2,906	3,506	
		Depth	mm			802				814		
Weight	Unit	kg	222		245		340	339	480	574	672	
	Operation weight	kg	223		247		343	342	486	580	680	
Water heat exchanger	Type						Brazed plate heat exchanger					
	Water volume	l	1		2				5			8
	Water flow rate	l/s	0.8	1.0	1.2	1.6	1.9	2.0	2.4	3.1		4.2
	Water pressure drop	kPa	20	11	16	19	28	10	14	22		20
Air heat exchanger	Type						High efficiency fin and tube type – Copper Aluminum					
Compressor	Type						Scroll compressor					
	Quantity				1				2			
Fan	Type						Axial					
	Quantity			1		2			3	4		
	Speed	rpm	800	900	700	900	700	900	800	900		
Sound power level	Cooling Nom.	dBA	76.0	78.0	79.0	80.0	81.0	83.0	85.0			
Sound pressure level	Cooling Nom.	dBA	59.7	61.7	62.2	63.2	62.8	63.8	65.4	67.0		
Refrigerant	Type/GWP						R-32/675					
	Charge	kg	3.00	5.50	7.00	8.00	12.0	13.0	16.0			
	Circuits Quantity			1				2				
Piping connections	Evaporator water inlet/outlet (OD)			1"1/4				2"				

Cooling: EW 12°C; LW 7°C; ambient conditions: 35°CDB | Cooling: EW 23°C; LW 18°C; ambient conditions: 35°CDB | Condition: Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) | Condition: Ta DB/WB 7°C/6°C - LWC 45°C (DT=5°C) | According to EN14825 | Depends on operation mode, refer to installation manual. | For more details, see operation range drawing

Air cooled scroll inverter chiller

- › Inverter chiller
- › High part load efficiency for low running cost
- › Minimal starting currents
- › No buffertank required for standard applications
- › Daikin scroll compressor
- › Wide operation range
- › Integrated hydronic module on request



More details and final information can be found by scanning or clicking the QR codes.



EWAT-CZP

Cooling Only			EWAT	016CZP-A1	021CZP-A1	025CZP-A1	032CZP-A1	040CZP-A1	040CZP-A2	050CZP-A2	064CZP-A2	090CZP-A2
Space cooling	A Condition Pdc 35°C	kW	16.0	21.0	25.7	32.6	39.8	41.6	51.0	64.3	88.6	
	ηs,c	%	209	213		225	211	228	216	211	204	
SEER			5.30	5.41		5.70	5.36	5.76	5.48	5.34	5.18	
Cooling capacity	Nom.	kW	16.1	21.1	25.9	32.7	39.9	41.7	51.1	64.4	88.8	
Power input	Cooling Nom.	kW	5.45	6.56	8.48	10.3	13.3	13.2	16.9	21.9	31.1	
Capacity control	Method						Inverter controlled					
	Minimum capacity	%	18	14	12	19	15	14	12	15	14	
EER			2.96	3.22	3.05	3.18	3.00	3.17	3.03	2.95	2.85	
IPLV			5.83	6.29	6.05	6.25	5.87	6.37	5.92	5.88	5.61	
Dimensions	Unit	Height	mm				1,878					
		Width	mm		1,152		1,752		2,306	2,906	3,506	
		Depth	mm		802					814		
Weight	Unit	kg	256	278		383	382		531	630	727	
	Operation weight	kg	257	280		386	385		537	636	735	
Water heat exchanger	Type					Brazed plate heat exchanger						
	Water volume	l	1		2				5		8	
	Water flow rate	l/s	0.8	1.0	1.2	1.6	1.9	2.0	2.4	3.1	4.2	
	Water pressure drop	kPa	20	11	16	19	28	10	14	22	20	
Air heat exchanger	Type					High efficiency fin and tube type – Copper Aluminum						
Compressor	Type					Scroll compressor						
	Quantity				1				2			
Fan	Type					Axial						
	Quantity			1		2			3	4		
	Speed	rpm	800	900	700	900	700	900	800	900		
Sound power level	Cooling Nom.	dBA	76.0	78.0	79.0	80.0	81.0			-		
Sound pressure level	Cooling Nom.	dBA	59.7	61.7	62.2	63.2	62.8	63.8		-		
Refrigerant	Type/GWP					R-32/675						
	Charge	kg	3.00	5.50	7.00	8.00	12.0	13.0	16.0			
	Circuits Quantity			1				2				
Piping connections	Evaporator water inlet/outlet (OD)			1"1/4				2"				

Cooling: EW 12°C; LW 7°C; ambient conditions: 35°CDB | Cooling: EW 23°C; LW 18°C; ambient conditions: 35°CDB | Condition: Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) | Condition: Ta DB/WB 7°C/6°C - LWC 45°C (DT=5°C) | According to EN14825 | Depends on operation mode, refer to installation manual. | For more details, see operation range drawing

Air cooled scroll inverter chiller

- › Inverter chiller
- › High part load efficiency for low running cost
- › Minimal starting currents
- › No buffertank required for standard applications
- › Daikin scroll compressor
- › Wide operation range
- › Integrated hydronic module on request



More details and final information
can be found by scanning or
clicking the QR codes.



EWAT-CZH

Cooling Only		EWAT	016CZH-A1	021CZH-A1	025CZH-A1	032CZH-A1	040CZH-A1	040CZH-A2	050CZH-A2	064CZH-A2	090CZH-A2
Space cooling	A Condition Pdc 35°C	kW	16.1	21.1	25.8	32.7	39.9	41.7	51.1	64.3	88.7
	ηs,c	%	205	210	211	224	210	227	213	208	202
Cooling capacity	Nom.	kW	16.2	21.2	25.9	32.8	40.1	41.8	51.3	64.5	88.9
Power input	Cooling Nom.	kW	5.60	6.70	8.70	10.4	13.5	13.3	17.0	22.0	31.2
Capacity control	Method						Inverter controlled				
	Minimum capacity	%	18	14	12	19	15	14	12	15	14
EER			2.89	3.15	2.98	3.14	2.97	3.15	3.02	2.93	2.85
IPLV			5.83	6.29	6.05	6.25	5.87	6.37	5.92	5.88	5.61
Dimensions	Unit	Height	mm				1,878				
		Width	mm		1,152		1,752		2,306	2,906	3,506
		Depth	mm			802				814	
Weight	Unit	kg	256		278		383	382	531	630	727
	Operation weight	kg	257		280		386	385	537	636	735
Water heat exchanger	Type						Brazed plate heat exchanger				
	Water volume	l	1		2				5		8
	Water flow rate	l/s	0.8	1.0	1.2	1.6	1.9	2.0	2.4	3.1	4.20
	Water pressure drop	kPa	20	11	16	19	28	10	14	22	20
Air heat exchanger	Type						High efficiency fin and tube type – Copper Aluminum				
Compressor	Type						Scroll compressor				
	Quantity				1				2		
Fan	Type						Axial				
	Quantity			1		2			3	4	
	Speed	rpm	800	900	700	900	700	900	800	900	
Sound power level	Cooling Nom.	dBA	76.0	78.0	79.0	80.0	81.0	83.0	85.0		
Sound pressure level	Cooling Nom.	dBA	59.7	61.7	62.2	63.2	62.8	63.8	65.4	67.0	
Refrigerant	Type/GWP						R-32/675				
	Charge	kg	3.00	5.50	7.00	8.00	12.0	13.0	16.0		
	Circuits Quantity			1				2			
Piping connections	Evaporator water inlet/outlet (OD)			1"1/4				2"			

Cooling: EW 12°C; LW 7°C; ambient conditions: 35°CDB | Cooling: EW 23°C; LW 18°C; ambient conditions: 35°CDB | Condition: Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) | Condition: Ta DB/WB 7°C/6°C - LWC 45°C (DT=5°C) | According to EN14825 | Depends on operation mode, refer to installation manual. | For more details, see operation range drawing

Air cooled scroll inverter heat pump

- › Inverter chiller
- › High part load efficiency for low running cost
- › Minimal starting currents
- › No buffertank required for standard applications
- › Daikin scroll compressor
- › Wide operation range
- › Integrated hydronic module on request
- › Dedicated controller extension (EKRSCIOH) for Heating applications



More details and final information
can be found by scanning or
clicking the QR codes.



EWYT-CZN

Heating & Cooling			EWYT	016CZN-A1	021CZN-A1	025CZN-A1	032CZN-A1	040CZN-A1	040CZN-A2	050CZN-A2	064CZN-A2	090CZN-A2	
Space cooling	A Condition 35°C	Pdc	kW	15.9	20.9	25.6	32.4	39.6	41.4	50.8	64.0	88.3	
	ηs,c		%		197		200	205	201	213	210	205	198
SEER					5.00		5.06	5.21	5.09	5.41	5.33	5.21	5.03
Space heating	Average climate water outlet 35°C	General	SCOP	3.89	4.00	4.07	4.06	4.07	4.07	4.02	4.00	3.98	4.00
			Seasonal space heating eff. class							A++			
Cooling capacity	Nom.		kW	15.9	20.9	25.6	32.4	39.6	41.4	50.8	64.0	88.3	
Heating capacity	Nom.		kW	15.9	20.2	24.8	32.4	39.4	40.3	49.8	61.9	85.8	
Power input	Cooling Nom.		kW	5.50	6.60	8.50	10.3	13.4	13.2	17.0	21.8	31.0	
	Heating Nom.		kW	4.70	5.80	7.50	9.40	11.8	11.9	15.4	19.1	27.2	
Capacity control	Method									Inverter controlled			
	Minimum capacity		%	18	14	12	19	15	14	12	15	14	
EER				2.90	3.16	3.00	3.13	2.95	3.12	2.98	2.93	2.84	
COP				3.41	3.46	3.33	3.45	3.33	3.38	3.24	3.23	3.16	
IPLV				5.83	6.29	6.05	6.25	5.87	6.37	5.92	5.88	5.61	
Dimensions	Unit	Height	mm							1,878			
		Width	mm							2,306			
		Depth	mm				802				2,906	3,506	
											814		
Weight	Unit		kg	227	252		350	349		494	588	693	
	Operation weight		kg	228	254		353	352		500	594	701	
Water heat exchanger	Type									Braze plate heat exchanger			
	Water volume		l	1		2				5		8	
Water flow rate	Cooling Nom.		l/s	0.8	1.0	1.2	1.6	1.9	2.0	2.4	3.1	4.2	
	Heating Nom.		l/s	0.8	1.0	1.2	1.5		1.9	2.4	3.0	4.1	
Water pressure drop	Cooling Nom.		kPa	20	11	16	19	28	10	14	22	20	
	Heating Nom.		kPa	19.6	10.6	15.4	19.1	27.1	9.4	13.8	20.4	19.1	
Air heat exchanger	Type									High efficiency fin and tube type – Copper Aluminum			
Compressor	Type									Scroll compressor			
	Quantity							1			2		
Fan	Type									Axial			
	Quantity							1			3	4	
	Speed		rpm	800	900	700	900	700	900	800	900		
Sound power level	Cooling Nom.		dBA	76.0	78.0	79.0		80.0		81.0	83.0	85.0	
Sound pressure level	Cooling Nom.		dBA	59.7	61.7	62.2	63.2	62.8	63.8	65.4	67.0		
Refrigerant	Type/GWP									R-32/675			
	Charge		kg	3.00	5.50	7.00	8.00		12.0		13.0	16.0	
	Circuits	Quantity				1					2		
Piping connections	Evaporator water inlet/outlet (OD)					1 1/4					2"		

Cooling: EW 12°C; LW 7°C; ambient conditions: 35°CDB | Cooling: EW 23°C; LW 18°C; ambient conditions: 35°CDB | Condition: Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) | Condition: Ta DB/WB 7°C/6°C - LWC 45°C (DT=5°C) | According to EN14825 | Depends on operation mode, refer to installation manual. | For more details, see operation range drawing

Air cooled scroll inverter heat pump

- › Inverter chiller
- › High part load efficiency for low running cost
- › Minimal starting currents
- › No buffertank required for standard applications
- › Daikin scroll compressor
- › Wide operation range
- › Integrated hydronic module on request
- › Dedicated controller extension (EKRSCIOH) for Heating applications



More details and final information
can be found by scanning or
clicking the QR codes.



EWYT-CZP

Heating & Cooling			EWYT	016CZP-A1	021CZP-A1	025CZP-A1	032CZP-A1	040CZP-A1	040CZP-A2	050CZP-A2	064CZP-A2	090CZP-A2
Space cooling	A Condition 35°C	Pdc kW	16.0	21.0	25.7	32.6	39.8	41.6	51.0	64.3	88.6	
	ηs,c	%	209	213	225	211	228	216	211	211	204	
SEER			5.30	5.41	5.70	5.36	5.76	5.48	5.34	5.18		
Space heating	Average climate water outlet 35°C	General SCOP	4.03	4.19		4.18		4.19	4.12	4.01	4.04	
		Seasonal space heating eff. class							A++			
Cooling capacity	Nom.	kW	16.1	21.1	25.9	32.7	39.9	41.7	51.1	64.4	88.8	
Heating capacity	Nom.	kW	15.6	19.9	24.6	32.1	39.0	40.0	49.5	61.4	85.3	
Power input	Cooling Nom.	kW	5.45	6.56	8.48	10.3	13.3	13.2	16.9	21.9	31.1	
	Heating Nom.	kW	4.63	5.81	7.42	9.32	11.7	11.8	15.3	19.2	27.3	
Capacity control	Method		Inverter controlled									
	Minimum capacity	%	18	14	12	19	15	14	12	15	14	
EER			2.96	3.22	3.05	3.18	3.00	3.17	3.03	2.95	2.85	
COP			3.37	3.43	3.31	3.44	3.33	3.38	3.23	3.20	3.13	
IPLV			5.83	6.29	6.05	6.25	5.87	6.37	5.92	5.88	5.61	
Dimensions	Unit	Height mm					1,878					
		Width mm				1,152		1,752		2,306		2,906
		Depth mm				802				814		3,506
Weight	Unit	kg	261	286	393	392		546	644	749		
	Operation weight	kg	262	288	396	395		551	650	757		
Water heat exchanger	Type		Braze plate heat exchanger									
	Water volume	l	1		2			5		8		
Water flow rate	Cooling Nom.	l/s	0.8	1.0	1.2	1.6	1.9	2.0	2.4	3.1	4.2	
	Heating Nom.	l/s	0.8	1.0	1.2	1.5		1.9	2.4	3.0	4.1	
Water pressure drop	Cooling Nom.	kPa	20	11	16	19	28	10	14	22	20	
	Heating Nom.	kPa	19.6	10.6	15.4	19.1	27.1	9.4	13.8	20.4	19.1	
Air heat exchanger	Type		High efficiency fin and tube type – Copper Aluminum									
Compressor	Type		Scroll compressor									
	Quantity				1					2		
Fan	Type		Axial									
	Quantity			1			2			3	4	
	Speed	rpm	800	900	700	900	700	900	800	900		
Sound power level	Cooling Nom.	dBA	76.0	78.0	79.0		80.0		81.0	83.0	85.0	
Sound pressure level	Cooling Nom.	dBA	59.7	61.7	62.2	63.2	62.8	63.8	65.4	67.0		
Refrigerant	Type/GWP		R-32/675									
	Charge	kg	3.00	5.50	7.00	8.00		12.0		13.0	16.0	
	Circuits	Quantity			1					2		
Piping connections	Evaporator water inlet/outlet (OD)				1"1/4					2"		

Cooling: EW 12°C; LW 7°C; ambient conditions: 35°CDB | Cooling: EW 23°C; LW 18°C; ambient conditions: 35°CDB | Condition: Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) | Condition: Ta DB/WB 7°C/6°C - LWC 45°C (DT=5°C) | According to EN14825 | Depends on operation mode, refer to installation manual. | For more details, see operation range drawing

Air cooled scroll inverter heat pump

- › Inverter chiller
- › High part load efficiency for low running cost
- › Minimal starting currents
- › No buffertank required for standard applications
- › Daikin scroll compressor
- › Wide operation range
- › Integrated hydronic module on request
- › Dedicated controller extension (EKRSCIOH) for Heating applications



More details and final information
can be found by scanning or
clicking the QR codes.



EWYT-CZH

Heating & Cooling			EWYT	016CZH-A1	021CZH-A1	025CZH-A1	032CZH-A1	040CZH-A1	040CZH-A2	050CZH-A2	064CZH-A2	090CZH-A2
Space cooling	A Condition 35°C	Pdc kW		16.1	21.1	25.8	32.7	39.9	41.7	51.1	64.3	88.7
	ηs,c	%		205	210	211	224	210	227	213	208	202
SEER				5.20	5.32	5.34	5.67	5.34	5.76	5.40	5.27	5.12
Space heating	Average climate water outlet 35°C	General SCOP		3.88	4.06	4.08	4.11	4.13	4.14	4.09	3.94	4.00
										A++		
Cooling capacity	Nom.	kW		16.2	21.2	25.9	32.8	40.1	41.8	51.3	64.5	88.9
Heating capacity	Nom.	kW		15.5	19.8	24.5	32.0	38.9	39.9	49.4	61.3	85.2
Power input	Cooling Nom.	kW		5.60	6.70	8.70	10.4	13.5	13.3	17.0	22.0	31.2
	Heating Nom.	kW		4.80	6.00	7.60	9.50	11.9	12.0	15.4	19.3	27.4
Capacity control	Method									Inverter controlled		
	Minimum capacity	%		18	14	12	19	15	14	12	15	14
EER				2.89	3.15	2.98	3.14	2.97	3.15	3.02	2.93	2.85
COP				3.24	3.31	3.22	3.37	3.28	3.33	3.20	3.17	3.12
IPLV				5.83	6.29	6.05	6.25	5.87	6.37	5.92	5.88	5.61
Dimensions	Unit	Height mm								1,878		
		Width mm								2,306		
		Depth mm								814		
Weight	Unit	kg		261	286	393	392			546	644	749
	Operation weight	kg		262	288	396	395			551	650	757
Water heat exchanger	Type									Braze plate heat exchanger		
	Water volume	l		1		2				5		8
Water flow rate	Cooling Nom.	l/s		0.8	1.0	1.2	1.6	1.9	2.0	2.4	3.1	4.2
	Heating Nom.	l/s		0.8	1.0	1.2	1.5		1.9	2.4	3.0	4.1
Water pressure drop	Cooling Nom.	kPa		20	11	16	19	28	10	14	22	20
	Heating Nom.	kPa		19.6	10.6	15.4	19.1	27.1	9.4	13.8	20.4	19.1
Air heat exchanger	Type									High efficiency fin and tube type – Copper Aluminum		
Compressor	Type									Scroll compressor		
	Quantity									1		2
Fan	Type									Axial		
	Quantity									1		2
	Speed rpm									2		4
Sound power level	Cooling Nom.	dBA		76.0	78.0	79.0		80.0		81.0	83.0	85.0
Sound pressure level	Cooling Nom.	dBA		59.7	61.7	62.2	63.2	62.8	63.8	65.4	67.0	
Refrigerant	Type/GWP									R-32/675		
	Charge kg			3.00	5.50	7.00	8.00		12.0		13.0	16.0
	Circuits Quantity					1				2		
Piping connections	Evaporator water inlet/outlet (OD)					1"1/4				2"		

Cooling: EW 12°C; LW 7°C; ambient conditions: 35°CDB | Cooling: EW 23°C; LW 18°C; ambient conditions: 35°CDB | Condition: Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) | Condition: Ta DB/WB 7°C/6°C - LWC 45°C (DT=5°C) | According to EN14825 | Depends on operation mode, refer to installation manual. | For more details, see operation range drawing

Inverter screw cooling only with BLU efficiency. Standard sound.

- › Environmentally conscious HFC134a – the most thermodynamically efficient refrigerant for air cooled applications
 - › New generation of air-cooled inverter series with extension of capacity range: Nominal capacity up to 1,950 kW
 - › New single screw compressor geometry allowing performance optimization
 - › Refrigerant cooled inverter mounted on compressor all across the range
 - › Premium energy efficiency both at full and part load conditions
 - › Best capacity with smallest footprint
 - › Microchannel coils
 - › Unique fully integrated active harmonic filtration solution
 - › Performance monitoring
 - › MicroTech 4 controller: sophisticated adaptive software logic for stable operating conditions

			EWAD-TZBSD	275	320	345	400	470	510	525	545	570	580	625	630	670	755		
SEER				4.517	4.637	4.636	4.829	4.809	4.561	4.73	4.55	4.552	4.711	4.65	4.556	4.564	4.917		
Cooling capacity	Nom.	kW	274.8	316.9	346	418.5	467	512.6	520.7	543.7	573.2	574.7	622.2	630.9	674	753.1			
Power input	Cooling	Nom.	kW	91.31	100.1	115.5	136.4	159.9	171	167.6	188.4	206	198.2	230.6	216.2	242.8	231.7		
Capacity control	Method									Stepless									
	Minimum capacity	%	22	19	17	22	23	11	22	10	19	17	10	13					
EER			3	3.2	3	3.1	2.9	3	3.1	2.9	2.8	2.9	2.7	2.9	2.8	3.3			
IPLV			4.4	4.6		4.8		4.4	4.7	4.4		4.7		4.5		4.9			
Dimensions	Unit	Height	mm							2,553									
		Width	mm							2,238									
		Depth	mm	2,560		3,640				4,720			5,800		6,880				
Weight	Unit		kg	2,602	3,084		3,486		4,212	4,032	4,212		4,032		4,695		5,670		
	Operation weight	kg	2,677	3,169		3,583.7	3,593.7	4,552	4,160.1	4,557	4,562	4,170.1	4,175.1	5,035	5,045	6,055			
Air heat exchanger	Type									Microchannel									
Compressor	Type									Screw compressor									
	Quantity							1		2	1	2		1		2			
Fan	Type									Direct propeller									
	Quantity			4		6				8			10		12				
	Airflow rate	Cooling	Nom.	l/s	25,490		38,240		50,980	50,990	50,980		50,990		63,730		76,480		
Sound power level	Cooling	Nom.	dBA	97	98	100	97	99	98	99	100	98	101	102	99				
Sound pressure level	Cooling	Nom.	dBA	78		80	78	77	79	77	79	80	78	80	82	78			
Operation range	Air side	Cooling	Min.~Max.	°CDB					5 ~46										
Refrigerant	Type/GWP									R-134a/1,430									
	Charge	kg	35	45	55	65		70	75	80	85	95	105						
	Circuits	Quantity			1			2	1	2	1		2						
Piping connections	Evaporator water inlet/outlet (OD)				88.9mm		139.7mm	168.3mm	139.7mm	168.3mm		139.7mm		168.3mm					
Unit	Starting current	Max	A							0									
	Running current	Cooling	Nom.	A	179.1	196.2	217.6	248.4	283.5	336.9	298.8	367.3	392.4	344.2	392.3	412.1	450	434.7	
	current	Max	A	220	262	284	346	362	411	400	440	471	457	464	512	556	600		
Power supply	Phase/Frequency/Voltage		Hz/V							3~/50/400									




Inverter screw with SILVER efficiency. Standard sound.

- › Environmentally conscious HFC134a – the most thermodynamically efficient refrigerant for air cooled applications
- › New generation of air-cooled inverter series with extension of capacity range: Nominal capacity up to 1,950 kW
- › New single screw compressor geometry allowing performance optimization
- › Refrigerant cooled inverter mounted on compressor all across the range
- › Premium energy efficiency both at full and part load conditions
- › Best capacity with smallest footprint
- › Microchannel coils
- › Unique fully integrated active harmonic filtration solution
- › Performance monitoring
- › MicroTech 4 controller: sophisticated adaptive software logic for stable operating conditions

More details and final information can be found by scanning or clicking the QR codes.



EWAD-TZSSD



MicroTech 4



EWAD_H_S-TZ-D

			EWAD-TZSSD	285	325	380	430	495	520	535	555	585	595	645	650	705	760			
SEER				5.551	5.737	5.636	5.741	5.434	5.281	5.659	5.237	5.099	5.556	5.291	5.535	5.2	5.547			
Cooling capacity	Nom.	kW		283.6	327.3	360.3	426.8	490.9	522.4	530.6	555.8	586.7	590	646.3	642.1	706.1	760.3			
Power input	Cooling	Nom.	kW	84.44	98.36	112.8	131	151.7	162.1	161	177.6	194.1	188.4	202.9	218.2	235.4	225.2			
Capacity control	Method			Stepless																
	Minimum capacity	%		22	19	17	22	23	11	22	10	19	10	17	10	13				
EER				3.4	3.3	3.2	3.3		3.2	3.3	3.1	3	3.1	3.2	2.9	3	3.4			
IPLV				5.7	5.8	5.7	6	5.8	5.4	6	5.3	5.2	5.8	5.4	5.6	5.3	6			
Dimensions	Unit	Height	mm	2,553																
		Width	mm	2,238																
		Depth	mm	3,640		4,720				5,800			6,880	5,800	6,880	7,960				
Weight	Unit	kg	3,084	3,604	3,968	4,032	4,693	4,513	4,693	4,513	5,177	4,513	5,177	6,151						
		Operation weight	kg	3,164	3,697	3,702	4,070.7	4,155.1	5,033	4,646.1	5,038	5,043	4,651.1	5,522	4,661.1	5,527	6,536			
Air heat exchanger	Type			Microchannel																
		Type		Screw compressor																
		Quantity			1		2	1	2		1	2	1	2	1	2				
Fan	Type			Direct propeller																
		Quantity		6		8			10			12	10	12	14					
		Air flow rate	Cooling	Nom.	l/s	38,240		50,990			63,730		76,480	63,730	76,480	89,230				
Sound power level	Cooling	Nom.	dBA	98	100	98	97	99	98	99	101	98	101	103	99					
Sound pressure level	Cooling	Nom.	dBA	78	80	77		79	77	79	80	78	80	82	78					
Operation range	Air side	Cooling	Min.~Max.	°CDB	5 ~46			-20 ~46	5 ~46	-20 ~46	5 ~46	-20 ~46	5 ~46	-20 ~46	-20 ~46					
Refrigerant	Type/GWP			R-134a/1,430																
	Charge	kg	40	45	50	60	65	70	75		80		90	95	105					
	Circuits	Quantity			1		2	1	2		1	2	1	2						
Piping connections	Evaporator water inlet/outlet (OD)			88.9mm		139.7mm		168.3mm	139.7mm	168.3mm		139.7mm	168.3mm	139.7mm	168.3mm					
		Starting current	Max	A	0															
		Running current	Cooling	Nom.	A	174.3	202.4	227.4	249.9	281.8	332.1	300.1	359.1	387.7	340.8	407	384.9	451.6	442.9	
Unit	current	Max	A	231	272	294	357	372	421	411	450	481	467	523	474	566	610			
	Power supply	Phase/Frequency/Voltage	Hz/V		3~/50 /400															
			EWAD-TZSSD	835	960	C10	H10	H11	H12	H13	H14	H15	H16	H17	H18	H19				
SEER				5.714	5.615	5.536	5.55	5.562	5.714	5.673	5.529	5.707	5.633	5.608	5.527	5.445				
Cooling capacity	Nom.	kW		837.7	960.2	1,017	1,064	1,168	1,281	1,372	1,482	1,562	1,665	1,787	1,876	1,954				
Power input	Cooling	Nom.	kW	258.7	301.2	332.2	351.6	384.5	412.6	451.9	500.2	485.4	542.2	589.4	654.5	725.7				
Capacity control	Method			Stepless																
	Minimum capacity	%		11	12	11			10			14	13	12	11	10				
EER				3.2		3.1	3		3.1		3	3.2	3.1	3	2.9	2.7				
IPLV				5.8	5.7		5.6			5.7	5.6	6.1	6	5.9	5.8	5.7				
Dimensions	Unit	Height	mm	2,553																
		Width	mm	2,238																
		Depth	mm	7,960															13,360	
Weight	Unit	kg	6,151	6,623	6,816	7,297	8,260	8,742	9,920		10,323			10,805						
		Operation weight	kg	6,546	7,239	7,244	7,518	8,014	8,992	9,489	11,136	11,549	11,564	12,066	12,076	12,086				
Air heat exchanger	Type			Microchannel																
		Type		Screw compressor																
		Quantity			2															
Fan	Type			14		16	20		22					24						
		Quantity			89,230		101,908	127,460		140,210					152,960					
		Air flow rate	Cooling	Nom.	l/s	100		101		102	104	105	103	104	105	106	107			
Sound power level	Cooling	Nom.	dBA	79	78	79			80	81	82	80	81	82	83	84				
Sound pressure level	Cooling	Nom.	dBA																	
Operation range	Air side	Cooling	Min.~Max.	°CDB	-20 ~46															
Refrigerant	Type/GWP			R-134a/1,430																
	Charge	kg	115	135	140	145	160	175	190	205	215	230	250	260	270					
	Circuits	Quantity			2															
Piping connections	Evaporator water inlet/outlet (OD)			168.3mm		219.1mm								273mm						
		Starting current	Max	A	0															
		Running current	Cooling	Nom.	A	489.7	555	601.4	630.5	683.6	733.8	796.2	871.1	848	931.7	1,005	1,101	1,206		
Unit	current	Max	A	679	706	761	789	884		948	1,156	1,124	1,227	1,351	1,475	1,608				
	Power supply	Phase/Frequency/Voltage	Hz/V		3~/50 /400															

Inverter screw with GOLD efficiency. Standard sound.

- › Environmentally conscious HFC134a – the most thermodynamically efficient refrigerant for air cooled applications
- › New generation of air-cooled inverter series with extension of capacity range: Nominal capacity up to 1,950 kW
- › New single screw compressor geometry allowing performance optimization
- › Refrigerant cooled inverter mounted on compressor all across the range
- › Premium energy efficiency both at full and part load conditions
- › Best capacity with smallest footprint
- › Microchannel coils
- › Unique fully integrated active harmonic filtration solution
- › Performance monitoring
- › MicroTech 4 controller: sophisticated adaptive software logic for stable operating conditions

More details and final information can be found by scanning or clicking the QR codes.



EWAD-TZXSD



MicroTech 4



EWAD_H_S-TZ-D

			EWAD-TZXSD	295	345	380	440	515	525	565	565	610	635	670	705	725	760	
SEER				5.605	6.007	5.961	6.165	6.019	6.002	6.251	5.937	5.999	6.146	5.891	5.552	5.94	5.308	
Cooling capacity	Nom.	kW		294.4	344.4	378	434.8	507.9	524.3	560.5	565.9	610.7	629	668.1	701	724	757.3	
Power input	Cooling	Nom.	kW	89.4	102.5	116.8	120.6	150	146.6	162	163.3	177	190.8	201.3	207.2	219.5	233.1	
Capacity control	Method																	
	Minimum capacity	%		22	19	17	28	23	13	22	12	11	19	10	30	10	28	
EER				3.3	3.4	3.2	3.6	3.4	3.6		3.5		3.3	3.4	3.3	3.2		
IPLV				6	6.3	6.1	6.6	6.5	6.3	6.7	6.1	6.2	6.5	6.1	5.7	6.2	5.6	
Dimensions	Unit	Height	mm															
		Width	mm															
		Depth	mm	3,640	4,720		5,800			6,880		7,960	6,880	7,960	6,880	7,960	6,880	
Weight	Unit		kg	3,255	3,775		4,569	5,348	5,136	5,348	5,829	5,136	5,829	5,805	5,946	5,805		
	Operation weight	kg		3,335	3,868	3,873	4,687.1	4,697.1	5,673	5,287.3	5,683	6,169	5,297.3	6,174	5,976.3	6,344	5,986.3	
Air heat exchanger	Type																	
Compressor	Type																	
	Quantity																	
Fan	Type																	
	Quantity			6	8		10			12		14	12	14	12	14	12	
	Air flow rate	Cooling	Nom.	l/s	33,930	45,240		56,540	67,860	68,280	67,860	79,170	68,280	79,170	68,280	79,170	68,280	
Sound power level	Cooling	Nom.	dBA	97	98	103	96	97		100		101	105	101	99	102	100	
Sound pressure level	Cooling	Nom.	dBA	80	82	83	75	76	79	76	80	81	77	83	78	84	79	
Operation range	Air side	Cooling	Min.~Max.	°CDB								-20 ~ 46						
Refrigerant	Type/GWP											R-134a/1,430						
	Charge	kg		40	45	50	60		70	75	80		85	90	95	100	105	
	Circuits	Quantity								1	2	1	2	1	2	1		
Piping connections	Evaporator water inlet/outlet (OD)									88.9mm	139.7mm	168.3mm	139.7mm	168.3mm	139.7mm	168.3mm	139.7mm	
Unit	Starting current	Max	A									0						
	Running current	Cooling	Nom.	A	188.5	216.8	235.8	247.6	291.7	319.1	316.3	348.1	378.7	359.4	420.8	383.5	443	421.6
	Max	A		224	261	289	314	342	389	404	429	457	452	498	520	535	568	
Power supply	Phase/Frequency/Voltage	Hz/V										3~/50 /400						
			EWAD-TZXSD	805	880	950	C10	H10	H11	C12	H12	H13	H14	H15	H16	H17		
SEER				6.088	6.355	6.192	6.365	6.186	6.313	6.217	6.126	6.14	5.896	5.807	5.723	5.629		
Cooling capacity	Nom.	kW		802.3	877.7	949.4	993.6	1,062	1,129	1,194	1,286	1,359	1,454	1,567	1,671	1,770		
Power input	Cooling	Nom.	kW	233.2	250.8	282.1	292.3	325.1	336.7	370.1	402.4	425.5	419.5	472.2	528.4	590.4		
Capacity control	Method																	
	Minimum capacity	%		10	14	13	12		11			10		15	14	13	12	
EER				3.4	3.5		3.4		3.4			3.2		3.5	3.3	3.2	3	
IPLV				6.4	6.6	6.4	6.5	6.4	6.5	6.4		6.3		6.1	6.3	6.2	6	
Dimensions	Unit	Height	mm															
		Width	mm															
		Depth	mm		9,040		10,120			11,200		12,280					13,360	
Weight	Unit		kg	6,904	7,160		7,642			8,316		9,655					10,805	
	Operation weight	kg		7,495	7,761	7,771	8,258	8,268	9,028	9,038	9,053	10,856	12,016	12,031	12,046	12,061		
Air heat exchanger	Type																	
Compressor	Type																	
	Quantity																	
Fan	Type																	
	Quantity																	
	16						18			20		22				24		
	Air flow rate	Cooling	Nom.	l/s	90,480		101,780			113,080		124,390					135,700	
Sound power level	Cooling	Nom.	dBA	105	98	100	101	102	103	105	108	106	102	103	104	105		
Sound pressure level	Cooling	Nom.	dBA	84	76		77			78		79	80				81	
Operation range	Air side	Cooling	Min.~Max.	°CDB														
Refrigerant	Type/GWP																	
	Charge	kg		110	120	130	135	145	155	165	180	190	200	215	230	245		
	Circuits	Quantity										2						
Piping connections	Evaporator water inlet/outlet (OD)									219.1mm						273mm		
Unit	Starting current	Max	A									0						
	Running current	Cooling	Nom.	A	470.4	496.7	543.6	565	613.9	637.5	687	737.2	777.9	774.1	852	934.8	1,026	
	Max	A		573	626	683	720	782	744	803	851	899	997	1,103	1,217	1,330		
Power supply	Phase/Frequency/Voltage	Hz/V										3~/50 /400						


Inverter screw with GOLD efficiency. Reduced sound.

- › Environmentally conscious HFC134a – the most thermodynamically efficient refrigerant for air cooled applications
- › New generation of air-cooled inverter series with extension of capacity range: Nominal capacity up to 1,950 kW
- › New single screw compressor geometry allowing performance optimization
- › Refrigerant cooled inverter mounted on compressor all across the range
- › Premium energy efficiency both at full and part load conditions
- › Best capacity with smallest footprint
- › Microchannel coils
- › Unique fully integrated active harmonic filtration solution
- › Performance monitoring
- › MicroTech 4 controller: sophisticated adaptive software logic for stable operating conditions

More details and final information can be found by scanning or clicking the QR codes.



EWAD-TZXRD



MicroTech 4



EWAD_H_S-TZ-D

			EWAD-TZXRD														
			295	345	380	440	515	525	565	565	610	635	670	705	725	760	
SEER			5.507	5.938	5.866	6.042	5.901	6.037	6.159	5.944	6.029	6.039	5.922	5.418	5.964	5.358	
Cooling capacity	Nom.	kW	290.7	340.9	373.4	431	502.3	518.8	555.4	559.5	604.2	622.3	660.4	691.7	714.9	745.6	
Power input	Cooling	Nom.	89.12	101.1	116.3	118.5	149.8	144.1	160.2	161.7	174.5	190.5	200.1	209.3	219.2	236.6	
Capacity control	Method																
	Minimum capacity	%	22	19	17	28	23	13	22	12	11	19	10	30	10	28	
EER			3.3	3.4	3.2	3.6	3.4	3.6			3.5			3.3		3.2	
IPLV			6.1	6.3	6.2		6.5	6.3	6.7		6.2		6.6	6.1	5.8	5.8	
Dimensions	Unit	Height	mm														
		Width	mm														
		Depth	mm	3,640	4,720	5,800				6,880		7,960	6,880	7,960	6,880	7,960	6,880
Weight	Unit		kg	3,375	3,895	4,689		5,468	5,256	5,468	5,949	5,256	5,949	5,925	6,066	5,925	
	Operation weight	kg	kg	3,455	3,988	3,993	4,807.1	4,817.1	5,793	5,407.3	5,803	6,289	5,417.3	6,294	6,096.3	6,464	6,106.3
Air heat exchanger	Type																
Compressor	Type																
	Quantity																
Fan	Type																
	Quantity																
	6	8	10														
Air flow rate	Cooling	Nom.	l/s	28,330	37,770	47,210				56,660		66,100	56,660	66,100	56,660	66,100	56,660
Sound power level	Cooling	Nom.	dBA	87	88	92				90		91	93	91	90	92	90
Sound pressure level	Cooling	Nom.	dBA	68	71	67	68			69		72	69	68	70	69	
Operation range	Air side	Cooling	Min.~Max.	°CDB							-20 ~46						
Refrigerant	Type/GWP											R-134a/1,430					
	Charge	kg	40	45	50	60	70	75	80	85	90	95	100	105			
	Circuits	Quantity						1	2	1	2	1	2	1	2	1	
Piping connections	Evaporator water inlet/outlet (OD)							88.9mm	139.7mm	168.3mm	139.7mm	168.3mm	139.7mm	168.3mm	139.7mm	168.3mm	
Unit	Starting current Max	A									0						
	Running current Max	A	193.6	221.9	241.5	252.5	299.5	326	323.5	356.7	387.5	368.6	431.6	396.2	454.1	436.4	
	Power supply	Phase/Frequency/Voltage	Hz/V								3~/50 /400						
			EWAD-TZXRD														
			805	880	950	C10	H10	H11	C12	H12	H13	H14	H15	H16	H17		
SEER			6.169	6.363	6.179	6.354	6.217	6.34	6.191	6.12	6.181	5.883	5.764	5.704	5.537		
Cooling capacity	Nom.	kW	792.9	867.7	937.7	982.6	1,049	1,117	1,179	1,268	1,341	1,434	1,543	1,641	1,729		
Power input	Cooling	Nom.	kW	231.9	250.8	283.9	292.8	327.6	338	373.2	408	430.2	424.5	480.3	539.4	603.9	
Capacity control	Method																
	Minimum capacity	%	10	14	13	12	11				10		15	14	13	12	
EER			3.4	3.5	3.3	3.4	3.2	3.3		3.2	3.1	3.4	3.2	3	2.9		
IPLV			6.4	6.6	6.4	6.6	6.4	6.6		6.4		6.1	5.9	6.2	5.8		
Dimensions	Unit	Height	mm														
		Width	mm														
		Depth	mm	9,040		10,120				11,200		12,280					13,360
Weight	Unit		kg	7,024	7,280	7,762				8,436		9,775					10,925
	Operation weight	kg	kg	7,615	7,881	7,891	8,378	8,388	9,148	9,158	9,173	10,976	12,136	12,151	12,166	12,181	
Air heat exchanger	Type																
Compressor	Type																
	Quantity																
Fan	Type																
	Quantity																
	16		18		20		22									24	
Air flow rate	Cooling	Nom.	l/s	75,540		84,980			94,420		103,870						113,320
Sound power level	Cooling	Nom.	dBA	94	90	91	92	93	94	96	95	93					94
Sound pressure level	Cooling	Nom.	dBA	72	68	69	70	72	74	72	69	70					71
Operation range	Air side	Cooling	Min.~Max.	°CDB													
Refrigerant	Type/GWP																
	Charge	kg	110	120	130	135	145	155	165	180	190	200	215	230	245		
	Circuits	Quantity									2						
Piping connections	Evaporator water inlet/outlet (OD)								219.1mm								
Unit	Starting current Max	A								0							
	Running current Max	A	481.4	509.6	559.3	580.3	632.1	655.3	707.6	761.7	802.5	800.7	883.2	970.5	1,066		
	Power supply	Phase/Frequency/Voltage	Hz/V							3~/50 /400							

Inverter screw with PLATINUM efficiency. Standard sound.

- › Environmentally conscious HFC134a – the most thermodynamically efficient refrigerant for air cooled applications
- › New generation of air-cooled inverter series with extension of capacity range: Nominal capacity up to 1,950 kW
- › New single screw compressor geometry allowing performance optimization
- › Refrigerant cooled inverter mounted on compressor all across the range
- › Premium energy efficiency both at full and part load conditions
- › Best capacity with smallest footprint
- › Microchannel coils
- › Unique fully integrated active harmonic filtration solution
- › Performance monitoring
- › MicroTech 4 controller: sophisticated adaptive software logic for stable operating conditions

More details and final information can be found by scanning or clicking the QR codes.



EWAD-TZPSD



MicroTech 4



EWAD_H_S-TZ-D

			EWAD-TZPSD	285	330	370	405	450	490	530	575	615	675	735
SEER				6.29	6.465	6.389	6.687	6.64	6.567	6.391	6.301	6.28	6.161	6.216
Cooling capacity	Nom.	kW		285.8	330.4	367.9	401.5	447	486.1	529.6	571.8	617.7	676.1	733.5
Power input	Cooling	Nom.	kW	77.75	92.02	106	105.2	117.3	130.3	143.1	158.6	171.1	194	210.7
Capacity control	Method													
	Minimum capacity	%		23	20	18	30	28	25	13	12	11	10	
EER				3.7	3.6	3.5		3.8		3.7		3.6		3.5
IPLV					6.7	6.6	7.3	7.6	7.5	6.7	6.6	6.5	6.4	6.5
Dimensions	Unit	Height	mm							2,553				
		Width	mm							2,238				
		Depth	mm	4,720	5,800			6,880		7,960			9,040	
Weight	Unit	kg		3,775	4,256	5,050	5,136			5,829		6,311	6,427	
	Operation weight	kg		3,863	4,349	4,354	5,163.1	5,272.3	5,277.3	6,159	6,164	6,651	6,661	6,825
Air heat exchanger	Type									Microchannel				
Compressor	Type									Screw compressor				
	Quantity						1				2			
Fan	Type									Direct propeller				
	Quantity			8	10			12		14		16		
	Air flow rate	Cooling	Nom.	l/s	45,240	56,540		67,850		79,170		90,480		
Sound power level	Cooling	Nom.	dBA	97	98	100	95	96	98	100		101	102	
Sound pressure level	Cooling	Nom.	dBA	78	81	82	74	75		79	80	81	83	
Operation range	Air side	Cooling	Min.~Max.	°CDB				-20 ~ 46						
Refrigerant	Type/GWP							R-134a/1,430						
	Charge	kg		40	45	50	55	60	65	75	80	85	95	100
	Circuits	Quantity					1				2			
Piping connections	Evaporator water inlet/outlet (OD)				88.9mm		139.7mm				168.3mm			
Unit	Starting current	Max	A					0						
	Running current	Cooling	Nom.	A	174	204	229	233	249	269	318	345	374	414
	Max		A	220	258	285	293	352	404	399	429	468	508	535
Power supply	Phase/Frequency/Voltage	Hz/V						3~/50 / 400						

			EWAD-TZPSD	810	890	960	C10	H10	H11	C12	H12	H13	H14	H15
SEER				6.48	6.725	6.602	6.648	6.483	6.529	6.398	6.263	6.31	5.978	5.928
Cooling capacity	Nom.	kW		809.8	885.5	958.4	1,003	1,072	1,137	1,203	1,298	1,372	1,455	1,568
Power input	Cooling	Nom.	kW	226.1	242.4	271.7	281.9	312.5	325.9	357.4	387.4	409.1	409.5	462.1
Capacity control	Method							Stepless						
	Minimum capacity	%		10	14	13	12		11		10		15	14
EER				3.6	3.7	3.5	3.6	3.4	3.5		3.4		3.6	3.4
IPLV				6.8	7	6.8	6.5	6.7	6.9	6.7	6.6	6.2	6.5	
Dimensions	Unit	Height	mm					2,553						
		Width	mm					2,238						
		Depth	mm		10,120		11,200			12,280			13,360	
Weight	Unit	kg		7,385	7,642		8,123			8,798	9,655	10,136	10,805	
	Operation weight	kg		7,976	8,243	8,253	8,744	8,754	9,515	9,520	10,846	11,337	12,021	12,036
Air heat exchanger	Type							Microchannel						
Compressor	Type							Screw compressor						
	Quantity							2						
Fan	Type							Direct propeller						
	Quantity							18		20		22		24
	Air flow rate	Cooling	Nom.	l/s	101,780		113,080			140,200			152,940	
Sound power level	Cooling	Nom.	dBA	105	99	100	101	102	103	105	108	106	102	103
Sound pressure level	Cooling	Nom.	dBA	84		76		77		78		79		80
Operation range	Air side	Cooling	Min.~Max.	°CDB				-20 ~ 46						
Refrigerant	Type/GWP							R-134a/1,430						
	Charge	kg		110	120	130	140	150	160	165	180	190	205	220
	Circuits	Quantity						2						
Piping connections	Evaporator water inlet/outlet (OD)						219.1mm				273mm			
Unit	Starting current	Max	A					0						
	Running current	Cooling	Nom.	A	466	490	534	555	601	627	674	721		
	Max	A		573	616	672	709	761	796	845	893	951	1,039	1,135
Power supply	Phase/Frequency/Voltage	Hz/V						3~/50 / 400						

Inverter screw with PLATINUM efficiency. Reduced sound.

- › Environmentally conscious HFC134a – the most thermodynamically efficient refrigerant for air cooled applications
- › New generation of air-cooled inverter series with extension of capacity range: Nominal capacity up to 1,950 kW
- › New single screw compressor geometry allowing performance optimization
- › Refrigerant cooled inverter mounted on compressor all across the range
- › Premium energy efficiency both at full and part load conditions
- › Best capacity with smallest footprint
- › Microchannel coils
- › Unique fully integrated active harmonic filtration solution
- › Performance monitoring
- › MicroTech 4 controller: sophisticated adaptive software logic for stable operating conditions

More details and final information can be found by scanning or clicking the QR codes.



EWAD-TZPRD



MicroTech 4



EWAD_H_S-TZ-D

			EWAD-TZPRD	285	330	370	405	450	490	530	575	615	675	735	
SEER				6.232	6.448	6.358	6.622	6.542	6.467	6.421	6.322	6.325	6.183	6.254	
Cooling capacity Nom. kW				283.7	328.4	365	398.8	443.9	482.4	524.8	566.5	612.5	669.9	726	
Power input Cooling Nom. kW				75.13	88.51	103.1	101	113.6	127.2	139	155.2	166.8	190.7	208.2	
Capacity control Method				Stepless											
Minimum capacity %				23	20	18	30	28	25	13	12	11	10		
EER				3.8	3.7	3.5	4	3.9		3.8		3.7		3.5	
IPLV				6.7	6.8	6.6	7.2	7.5	7.4	6.7	6.6	6.5	6.4	6.5	
Dimensions	Unit	Height	mm	2,553											
		Width	mm	2,238											
		Depth	mm	4,720	5,800		6,880			7,960			9,040		
Weight	Unit		kg	3,895	4,376	5,170	5,256			5,949		6,431	6,547		
		Operation weight	kg	3,983	4,469	4,474	5,283.1	5,392.3	5,397.3	6,279	6,284	6,771	6,781	6,945	
Air heat exchanger Type				Microchannel											
Compressor Type				Screw compressor											
Quantity				1											
Fan Type				Direct propeller											
Quantity				8	10		12			14		16			
Air flow rate Cooling Nom. l/s				37,770	47,210		56,660			66,100		75,540			
Sound power level Cooling Nom. dBA				88	89	90	88	89			91		92		
Sound pressure level Cooling Nom. dBA				68	69		67	68			69		70		
Operation range Air side Cooling Min.~Max. °CDB				-20 ~46											
Refrigerant Type/GWP				R-134a/1,430											
Charge kg				40	45	50	55	60	65	75	80	85	95	100	
Circuits Quantity				1											
Piping connections Evaporator water inlet/outlet (OD)				88.9mm											
Unit	Starting current Max A			0											
		Running current Max A	A	176.6	207.4	232.7	236.3	253.2	273.8	324.3	352.5	381.3	422.7	448	
Power supply Phase/Frequency/Voltage Hz/V				220		258	285	293	352	404	399	429	468	508	
				50 / 400											
			EWAD-TZPRD	810	890	960	C10	H10	H11	C12	H12	H13	H14	H15	
SEER				6.51	6.771	6.598	6.661	6.515	6.683	6.555	6.433	6.432	6.055	5.932	
Cooling capacity Nom. kW				801.7	876.7	948.2	993	1,061	1,126	1,190	1,282	1,356	1,435	1,544	
Power input Cooling Nom. kW				222.8	240.2	271.1	280	312.2	324.7	357.7	389.9	410.4	413.9	469.4	
Capacity control Method				Stepless											
Minimum capacity %				10	14	13	12	11			10		15	14	
EER				3.6											
IPLV				6.8	7.1		6.9	6.7	7	6.7	6.6	6.3	6.1		
Dimensions	Unit	Height	mm	2,553											
		Width	mm	2,238											
		Depth	mm	10,120											
Weight	Unit		kg	7,505	7,762		8,243			8,918	9,775	10,256	10,925		
		Operation weight	kg	8,096	8,363	8,373	8,864	8,874	9,635	9,640	10,966	11,457	12,141	12,156	
Air heat exchanger Type				Microchannel											
Compressor Type				Screw compressor											
Quantity				2											
Fan Type				Direct propeller											
Quantity				18											
Air flow rate Cooling Nom. l/s				84,980											
Sound power level Cooling Nom. dBA				94	90	91	92	93	95	96	95	93			
Sound pressure level Cooling Nom. dBA				72	68		69	70	72	74	72	69	70		
Operation range Air side Cooling Min.~Max. °CDB				-20 ~46											
Refrigerant Type/GWP				R-134a/1,430											
Charge kg				110	120	130	140	150	160	165	180	190	205	220	
Circuits Quantity				2											
Piping connections Evaporator water inlet/outlet (OD)				219.1mm											
Unit	Starting current Max A			0											
		Running current Max A	A	475.1	501.2	547.7	568.5	616.6	643	692.2	742.3	780.3	784.9	867	
Power supply Phase/Frequency/Voltage Hz/V				573		616	672	709	761	796	845	893	951	1,039	
				3~/50 /400											

Inverter screw cooling only with BLU efficiency. Standard sound.

- › HFO R-1234ze(E) Refrigerant with Ozone Depletion Potential equal to zero and extremely low Global Warming Potential
- › New generation of air-cooled inverter series with extension of capacity range: Nominal capacity up to 1,600 kW
- › New single screw compressor geometry allowing performance optimization
- › Refrigerant cooled inverter mounted on compressor all across the range
- › Premium energy efficiency both at full and part load conditions
- › Best capacity with smallest footprint
- › Microchannel coils
- › Unique fully integrated active harmonic filtration solution
- › Performance monitoring
- › MicroTech 4 controller: sophisticated adaptive software logic for stable operating conditions

More details and final information can be found by scanning or clicking the QR codes.



EWAH-TZBSD



MicroTech 4



EWAH_H_S-TZ-D

			EWAH-TZBSD	235	255	300	350	400	400	420	425	455	485	505	545	545	590	
SEER				4.491	4.373	4.355	4.666	4.428	4.588	4.601	4.571	4.593	4.603	4.565	4.557	4.595	4.568	
Cooling capacity Nom.			kW	235.4	255.6	301.6	359.8	398.5	417.2	425.2	448.8	487.5	500	537.5	576.1			
Power input Cooling Nom.			kW	79.49	92.42	118.2	117.9	140.7	151.4	135.6	176.2	162	204.3	202.2	201.2			
Capacity control			Method	Stepless														
Minimum capacity			%	19	17	14	23	12	20	19	11	17	10	15		10		
EER				2.961	2.766	2.552	3.052	2.832	2.755	3.137	2.547	3.009	2.447	2.658	2.864			
IPLV				4.484	4.419	4.369	4.683	4.411	4.584	4.558	4.407	4.537	4.451	4.523	4.492	4.462	4.402	
Dimensions	Unit	Height	mm	2,553														
		Width	mm	2,238														
		Depth	mm	2,560		3,640	4,720	3,640	4,720	3,640	4,720	3,640	4,720	3,640	4,720	5,800		
Weight	Unit		kg	2,559	2,589	3,486	3,751	3,486	3,751	3,486	3,751	3,486	3,941	3,871	4,353	3,971	4,422	
		Operation weight	kg	2,589	2,594	2,629	3,536	3,806	3,541	3,811	3,546	4,006	3,941	4,428	4,046	4,502		
Air heat exchanger Type				Microchannel														
Compressor Type				Screw compressor														
Quantity				1		2		1	2	1	2	1	2	1	2			
Fan	Type			Direct propeller														
		Quantity		4		6		8		6		8		6	8	10		
Air flow rate Cooling Nom.			l/s	25,490	25,493	38,240	50,987	38,240	50,987	38,240	50,987	38,240	50,987	38,240	50,990	50,987	63,733	
Sound power level Cooling Nom.			dBA	97.5	99.8	101.2	96.7	97.5	97.6	97.7	100.4	100.3	100.6	101.9	103	102.8	103.9	
Sound pressure level Cooling Nom.			dBA	78.41	80.65	82.11	76.96	77.19	77.88	78	80.12	80.61	80.29	82.2	82.7	82.53	83.21	
Operation range Air side Cooling Min.~Max.			°CDB	5 ~46														
Refrigerant Type/GWP				R-1234(ze)/7														
Charge			kg	30	35	40	50	55		60		65		70	75	80		
Circuits Quantity				1		2		1		2		2		1	2			
Piping connections Evaporator water inlet/outlet (OD)				88.9mm		139.7mm				168.3mm	139.7mm	168.3mm						
Unit	Starting current Max		A	0														
		Running current Max	A	159	181	219	221	255	271	274	308	321	351		391			
		current Max	A	204	227	268	291	334	355	358	396	406	435	463	452	494		
Power supply	Phase/Frequency/Voltage		Hz/V	3~/50 /400														
			EWAH-TZBSD	635	745	785	845	900	985	C11	H11	C13	H13	H14	C15	H15		
SEER				4.612	4.792	4.758	4.774	4.766	4.72	4.71	4.65	5.062	5.043	5.041	4.983	4.984		
Cooling capacity Nom.			kW	633.2	742.7	786.2	842.9	899	983.8	1,104	1,177	1,315	1,386	1,474	1,535	1,586		
Power input Cooling Nom.			kW	226.9	238.6	261.4	287.6	302.2	350.9	391.1	436	423.5	471	508.7	563.3	580.5		
Capacity control			Method	Stepless														
Minimum capacity			%	10	12	11		10		12	11		10					
EER				2.791	3.113	3.007	2.931	2.974	2.804	2.823	2.699	3.105	2.943	2.898	2.725	2.732		
IPLV				4.452	4.741	4.716	4.722	4.692	4.624	4.623	4.543	5.285	5.263	5.232	5.165	5.15		
Dimensions	Unit	Height	mm	2,553														
		Width	mm	2,238														
		Depth	mm	5,800		6,880		7,960		9,040		10,120		11,200		12,280		
Weight	Unit		kg	4,452	5,370	5,614	6,096	6,185	7,352		8,279		8,760		9,242			
		Operation weight	kg	4,537	5,470	5,480	5,729	6,221	6,320	7,507	7,517	8,459	8,469	8,965	8,975	9,462		
Air heat exchanger Type				Microchannel														
Compressor Type				Screw compressor														
Quantity				2														
Fan	Type			Direct propeller														
		Quantity		10		12		14		16		18		20		22		
Air flow rate Cooling Nom.			l/s	63,733		76,480		89,233		101,980		114,720		127,467		140,213		
Sound power level Cooling Nom.			dBA	104.6	99.7	100.3	100.6	101.5	103.2	105.1	106.9	104.3	105.2	106.1	107	107.5		
Sound pressure level Cooling Nom.			dBA	83.83	78.53	79.14	79.46	79.93	81.67	83.17	84.97	82.09	82.94	83.56	84.45	84.63		
Operation range Air side Cooling Min.~Max.			°CDB	5 ~46														
Refrigerant Type/GWP				R-1234(ze)/7														
Charge			kg	85	100	110	115	125	135	155	165	180	190	205	215	220		
Circuits Quantity				2														
Piping connections Evaporator water inlet/outlet (OD)				168.3mm		219.1mm				273mm								
Unit	Starting current Max		A	0														
		Running current Max	A	425	445	480	519	544	617	682	748	733	804	862	943	971		
		current Max	A	536	581	624	667	719	801	889	927	1,015	1,106	1,383	1,330	1,400		
Power supply	Phase/Frequency/Voltage		Hz/V	3~/50 /400														

Inverter screw with SILVER efficiency. Standard sound.

- › HFO R-1234ze(E) Refrigerant with Ozone Depletion Potential equal to zero and extremely low Global Warming Potential
- › New generation of air-cooled inverter series with extension of capacity range: Nominal capacity up to 1,600 kW
- › New single screw compressor geometry allowing performance optimization
- › Refrigerant cooled inverter mounted on compressor all across the range
- › Premium energy efficiency both at full and part load conditions
- › Best capacity with smallest footprint
- › Microchannel coils
- › Unique fully integrated active harmonic filtration solution
- › Performance monitoring
- › MicroTech 4 controller: sophisticated adaptive software logic for stable operating conditions

More details and final information can be found by scanning or clicking the QR codes.



EWAH-TZSSD



MicroTech 4



EWAD_H_S-TZ-D

			EWAH-TZSSD															
			240	265	295	370	400	415	450	470	490	535	540	595	630	690		
SEER			5.606	5.489	5.354	5.624	5.379	5.498	5.506	5.211	5.512	5.252	5.592	5.291	5.221	5.538		
Cooling capacity	Nom.	kW	242.1	264.9	296.5	366.7	402.3	408.8	447.1	468.8	485.8	508.7	533.5	592.4	626.5	696.4		
Power input	Cooling	Nom.	kW	75.33	86.23	98.15	112.9	121.5	133.5	144.5	149.2	166.9	162.3	183.6	188.6	206.3	214.1	
Capacity control	Method																	
	Minimum capacity	%	19	17	15	23	12	20	19	10	17	10	15	10	13			
EER			3.214	3.072	3.021	3.248	3.312	3.062	3.094	3.143	2.911	3.134	2.906	3.141	3.037	3.252		
IPLV			5.624	5.53	5.387	5.92	5.48	5.755	5.738	5.317	5.593	5.351	5.607	5.392	5.316	5.64		
Dimensions	Unit	Height	mm															
		Width	mm															
		Depth	mm	3,640		4,720	5,800	4,720	5,800	4,720	5,800	4,720	5,800		6,880			
Weight	Unit		kg	3,041	3,071	3,968	4,233	3,968	4,032	4,233	4,032	4,422	4,834		4,934	5,370		
	Operation weight	kg		3,076	3,111	4,018	4,288	4,023	4,092	4,298	4,097	4,492	4,909		5,014	5,019		
Air heat exchanger	Type																	
Compressor	Type																	
	Quantity																	
Fan	Type																	
	Quantity																	
	Air flow rate	Cooling	Nom.	l/s	38,240		50,990	63,733	50,990	63,733	50,990	63,733		76,480				
Sound power level	Cooling	Nom.	dBA	97.9	100	102.3	97.1	97.8	98	98.1	100.7	100.5	101.3	102.2	104.3	105.1	99	
Sound pressure level	Cooling	Nom.	dBA	78.18	80.27	82.57	76.87	77.09	77.71	77.82	79.96	80.28	80.56	81.47	83.15	83.92	77.8	
Operation range	Air side	Cooling	Min.~Max.	°CDB														
Refrigerant	Type/GWP																	
	Charge	kg	35	40	50		55	60		65		70	75	80	85	95		
	Circuits	Quantity				1		2	1	2	1	2	1	2				
Piping connections	Evaporator water inlet/outlet (OD)				88.9mm			139.7mm				168.3mm	139.7mm		168.3mm			
Unit	Starting current	Max	A								0							
	Running current	Cooling	Nom.	A	158.4	177.6	198.4	226.8	259.9	254	271.3	309	304.8	332.2	334.3	381.9	412.4	425.7
	Max	A		214	237	259	302	345	344	365	405	406	428	455	495	526	538	
Power supply	Phase/Frequency/Voltage	Hz/V									3~/50 /400							
			EWAH-TZSSD															
			740	795	855	910	980	C10	C11	C12	H12	H13	C14	C15	H15			
SEER			5.452	5.539	5.505		5.532	5.53	5.489	5.339	5.735	5.652	5.723	5.774	5.686			
Cooling capacity	Nom.	kW	741.3	795.3	854.3	909.5	983.4	1,043	1,113	1,211	1,331	1,406	1,492	1,542	1,606			
Power input	Cooling	Nom.	kW	236.7	254.1	278.9	294	322.6	341.1	365.2	416.6	409.9	455.3	495.6	512.4	566.3		
Capacity control	Method																	
	Minimum capacity	%		11				10			12	11		10				
EER				3.132	3.13	3.063	3.094	3.048	3.058	3.046	2.906	3.248	3.088	3.01	3.009	2.836		
IPLV				5.523	5.564	5.539	5.56	5.516	5.505	5.452	5.254	6.207	5.994	6.078	6.09	5.956		
Dimensions	Unit	Height	mm															
		Width	mm															
		Depth	mm	6,880	7,960		9,040	10,120			11,200			12,280		13,360		
Weight	Unit		kg	5,370	5,852	6,096	6,577	7,059	7,629	8,315		8,760		9,242		9,723		
	Operation weight	kg		5,470	5,962	6,216	6,702	7,194	7,774	8,470	8,485	8,945	8,955	9,447	9,938	9,948		
Air heat exchanger	Type																	
Compressor	Type																	
	Quantity																	
Fan	Type																	
	Quantity																	
	Air flow rate	Cooling	Nom.	l/s	76,480		89,233	101,908	114,714		127,460			140,206		152,952		
Sound power level	Cooling	Nom.	dBA	99.7	100.5	100.8	101.6	103	104.1	104.8	107	104.4	105.2	106.2	107.1	107.5		
Sound pressure level	Cooling	Nom.	dBA	78.52	78.95	79.25	79.73	80.8	81.53	82.27	84.42	81.86	82.7	83.33	83.98	84.4		
Operation range	Air side	Cooling	Min.~Max.	°CDB														
Refrigerant	Type/GWP																	
	Charge	kg	100	110	120	125	135	145	155	170	185	195	205	215	225			
	Circuits	Quantity										2						
Piping connections	Evaporator water inlet/outlet (OD)				168.3mm			219.1mm				273mm						
Unit	Starting current	Max	A								0							
	Running current	Cooling	Nom.	A	456.1	483.2	520.7	547.3	594.5	627.5	665.5	741.8	732.3	799.8	862.2	893.4	973.3	
	Max	A		581	634	677	729	802	852	891	948	1,025	1,117	1,393	1,351	1,410		
Power supply	Phase/Frequency/Voltage	Hz/V									3~/50 /400							

Inverter screw with GOLD efficiency. Standard sound.

- › HFO R-1234ze(E) Refrigerant with Ozone Depletion Potential equal to zero and extremely low Global Warming Potential
- › New generation of air-cooled inverter series with extension of capacity range: Nominal capacity up to 1,600 kW
- › New single screw compressor geometry allowing performance optimization
- › Refrigerant cooled inverter mounted on compressor all across the range
- › Premium energy efficiency both at full and part load conditions
- › Best capacity with smallest footprint
- › Microchannel coils
- › Unique fully integrated active harmonic filtration solution
- › Performance monitoring
- › MicroTech 4 controller: sophisticated adaptive software logic for stable operating conditions

More details and final information can be found by scanning or clicking the QR codes.



EWAH-TZXSD



MicroTech 4



EWAD_H_S-TZ-D

			EWAH-TZXSD	220	230	275	300	350	400	465	470	515	540	545	600		
SEER				5.528	5.478	5.899	5.78	6.259	6.127	5.999	6.336	6.198	5.64	6.108	6.04		
Cooling capacity Nom. kW				219.8	323.4	275.1	299.3	348.7	397.5	471.7	466	504.2	534.5	543.9	602.4		
Power input Cooling Nom. kW				67.79	74.71	82.02	92.55	99.59	122.1	135.2	139.9	159.8	152.6	155.1	178.4		
Capacity control Method				Stepless													
Minimum capacity %				22	20	18	16	25	22	10	19	17	30	10			
EER				3.243	3.111	3.354	3.234	3.501	3.256	3.488	3.331	3.156	3.503	3.508	3.376		
IPLV				6.035	5.988	6.156	6.085	6.684	6.588	6.223	6.422	5.95	6.381	6.28			
Dimensions	Unit	Height	mm	2,553													
		Width	mm	2,238													
		Depth	mm	2,560	3,640			4,720			6,880	5,800			6,880		
Weight	Unit	kg	kg	2,731	3,242			4,023			4,886	4,569			5,323		
		kg	kg	2,761	3,277	3,282	4,068	4,078	4,951	4,634	4,639	5,398	5,180	5,242	5,105		
Air heat exchanger Type				Microchannel													
Compressor Type				Screw compressor													
Quantity				1			2			1			2				
Fan	Type	Direct propeller												12			
		Quantity		4			6			8			12				
		Air flow rate Cooling Nom. l/s		22,620	33,930			45,240			67,860	56,540			67,860		
Sound power level Cooling Nom. dBA				97.3	97.5	100.2	100.8	97.3	99.8	100.6	104.5	101.7	98.8	100.9	105.5		
Sound pressure level Cooling Nom. dBA				78.13	78.36	80.42	81.11	77.01	79.55	79.43	83.77	80.97	78.1	79.75	84.34		
Operation range Air side Cooling Min.~Max. °CDB				-20 ~46													
Refrigerant Type/GWP				R-1234(ze)/7													
Charge kg				30	35	40	45	55	65	70	75	85					
Circuits Quantity				1			2			1			2				
Piping connections Evaporator water inlet/outlet (OD)				88.9mm			139.7mm			168.3mm							
Unit	Starting current Max A	0															
		Running current Max A		145.1	157.4	175.8	194.2	211.3	243.1	299	276.8	306.6	296.2	334.4	375.7		
		current Max A		172	183	214	236	269	310	364	357	394	414	406	448		
Power supply Phase/Frequency/Voltage			Hz/V	3~/50 /400													
			EWAH-TZXSD	620	645	700	750	790	840	900	975	H10	H11	H12	H13		
SEER				5.558	6.211	6.102	6.362	6.407	6.296	6.195	6.234	6.183	5.865	5.933	5.988		
Cooling capacity Nom. kW				617	641.9	697.1	752.7	788.8	841.2	897.2	972.1	1,082	1,184	1,275	1,383		
Power input Cooling Nom. kW				191	186	209.1	219	225.9	249.4	273.7	299.9	326.1	346.2	380	415.3		
Capacity control Method	Stepless			25	14	13	12	11	10	10	14	13	12				
	Minimum capacity %		Stepless														
	Air flow rate Cooling Nom. l/s		55,540	67,860			79,170	90,480			101,772	113,080					
EER				3.231	3.452	3.334	3.437	3.491	3.373	3.278	3.242	3.318	3.42	3.355	3.33		
IPLV				5.741	6.446	6.347	6.608	6.64	6.479	6.36	6.383	6.42	6.367	6.514	6.481		
Dimensions	Unit	Height	mm	2,553													
		Width	mm	2,238													
		Depth	mm	5,800	6,880			7,960	9,040			10,120	11,200				
Weight	Unit	kg	kg	5,323	5,414			6,151	6,633			7,203	8,091				
		Operation weight kg		5,408	5,504	5,509	6,256	6,743	6,748	6,847	7,338	8,241	8,925	9,417	9,913		
Air heat exchanger Type				Microchannel													
Compressor Type				Screw compressor													
Quantity				1	2												
Fan	Type	Direct propeller												24			
		Quantity		10	12	14	16	18	16	18	20	22	24				
		Air flow rate Cooling Nom. l/s		56,540	67,860			79,170	90,480			101,772	113,080			124,388	135,696
Sound power level Cooling Nom. dBA				100.5	98.1	100.1	100.9	101.5	102.8	105.1	106.8	104.7	102.7	103.6	104.5		
Sound pressure level Cooling Nom. dBA				79.81	76.91	78.9	79.3	79.61	80.92	83.2	84.61	82.17	80.14	80.78	81.43		
Operation range Air side Cooling Min.~Max. °CDB				-20 ~46													
Refrigerant Type/GWP				R-1234(ze)/7													
Charge kg			kg	85	90	95	105	110	115	125	135	150	165	175	190		
Circuits Quantity				1	2												
Piping connections Evaporator water inlet/outlet (OD)				139.7mm	168.3mm			219.1mm			273mm						
Unit	Starting current Max A	0															
		Running current Max A		353.5	388.6	428.2	445.5	457.9	493.4	530.6	575.7	623.9	651.9	708.1	768.7		
		current Max A		491	472	517	527	579	618	655	702	787	902	992	1,090		
Power supply Phase/Frequency/Voltage			Hz/V	3~/50 /400													

Inverter screw with GOLD efficiency. Reduced sound.

- › HFO R-1234ze(E) Refrigerant with Ozone Depletion Potential equal to zero and extremely low Global Warming Potential
- › New generation of air-cooled inverter series with extension of capacity range: Nominal capacity up to 1,600 kW
- › New single screw compressor geometry allowing performance optimization
- › Refrigerant cooled inverter mounted on compressor all across the range
- › Premium energy efficiency both at full and part load conditions
- › Best capacity with smallest footprint
- › Microchannel coils
- › Unique fully integrated active harmonic filtration solution
- › Performance monitoring
- › MicroTech 4 controller: sophisticated adaptive software logic for stable operating conditions

More details and final information can be found by scanning or clicking the QR codes.



EWAH-TZXRD



MicroTech 4



EWAH_H_S-TZ-D

			EWAH-TZXRD	220	230	275	300	350	400	465	470	515	540	545	600			
SEER				5.404	5.363	5.942	5.775	6.188	6.026	6.02	6.284	6.103	5.588	6.133	6.042			
Cooling capacity Nom. kW				216.3	228.3	271.7	295.3	345.2	393.5	467.2	461.6	497.8	528	537.6	594.3			
Power input Cooling Nom. kW				68.5	75.92	81.59	92.45	98.6	122.2	132.7	139.1	159.9	153.8	153.6	178.3			
Capacity control Method				Stepless														
Minimum capacity %				22	20	18	16	25	22	10	19	17	30		10			
EER				3.157	3.007	3.33	3.194	3.501	3.219	3.52	3.319	3.112	3.434	3.494	3.334			
IPLV				6.058	6.007	6.144	6.065	6.641	6.619	6.273	6.667	6.49	5.796	6.414	6.301			
Dimensions	Unit	Height	mm	2,553														
		Width	mm	2,238														
		Depth	mm	2,680		3,760		4,840		7,000		5,920		7,000				
Weight	Unit	kg	kg	2,851		3,362		4,143		5,006		4,689		5,443				
				2,761		3,277		3,282		4,068		4,078		4,951				
Air heat exchanger Type				Microchannel														
Compressor Type				Screw compressor														
Quantity				1				2				1	2					
Fan	Type	Quantity		Direct propeller														
				4		6		8		12		10		12				
				18,890		28,330		37,770		56,660		47,213		56,660				
Sound power level Cooling Nom. dBA				86.7	86.9	89.3	89.9	87.9	89.4	90.5	93.3	91.1	89.2	90.8	94.2			
Sound pressure level Cooling Nom. dBA				67.62	67.78	69.6	70.14	67.59	69.17	69.38	72.53	70.32	68.42	69.59	73.07			
Operation range Air side Cooling Min.~Max. °CDB				-20 ~46														
Refrigerant	Type/GWP	kg	kg	R-1234(ze)/7														
				30		35		40		45		55		65				
				1								2		1				
Circuits Quantity				168.3mm														
Piping connections Evaporator water inlet/outlet (OD)				88.9mm														
Unit	Starting current Max A	A		0														
				150.2	163.3	180.6	199.6	216.9	249.8	305.9	283.6	314.9	306.1	343.5	386.6			
Unit	Running current Max A	A		172	183	214	236	269	310	364	357	394	414	406	448			
Power supply Phase/Frequency/Voltage			Hz/V	3~/50 /400														
	EWAH-TZXRD	620	645	700	750	790	840	900	975	H10	H11	H12	H13					
SEER				5.467	6.207	6.095	6.392	6.417	6.318	6.216	6.252	6.226	5.875	5.942	5.987			
Cooling capacity Nom. kW				6071	632.8	687.3	743.4	780.8	831.9	886	959.8	1,066	1,167	1,257	1,363			
Power input Cooling Nom. kW				194.4	186.7	211.1	220	225.2	250.2	276	301.6	327.9	351.2	384.5	419.4			
Capacity control	Method	%		Stepless														
				25	14	13		12		11		10		14				
				1										13	12			
EER				3.123	3.389	3.255	3.379	3.467	3.325	3.21	3.182	3.251	3.323	3.268	3.251			
IPLV				5.64	6.46	6.317	6.633	6.648	6.52	6.407	6.445	6.447	6.498	6.388	6.435			
Dimensions	Unit	Height	mm	2,553														
		Width	mm	2,238														
		Depth	mm	5,920		7,000		8,080		9,160		10,240		11,320		12,400		
Weight	Unit	kg	kg	9,843														
				5,443	5,534	6,271		6,753		6,842		7,323		8,211		8,880		
Air heat exchanger Type				Microchannel														
Compressor Type				Screw compressor														
Quantity				1				2										
Fan	Type	Quantity		Direct propeller														
				10		12		14		16		18		20				
				47,213		56,660		66,098		75,540		84,983		94,425		103,868		
Air flow rate Cooling Nom. l/s				47,213		56,660		66,098		75,540		84,983		94,425		103,868		
Sound power level Cooling Nom. dBA				90.2	89.1	90.2	91	91.6	92.4	94.1	95.6	94.1	92.7	93.4	94.2			
Sound pressure level Cooling Nom. dBA				69.5	67.94	69.04	69.4	69.68	70.53	72.22	73.4	71.53	70.14	70.59	71.07			
Operation range Air side Cooling Min.~Max. °CDB				-20 ~46														
Refrigerant	Type/GWP	kg	kg	R-1234(ze)/7														
				85	90	95	105	110	115	125	135	150	165	175	190			
				1								2						
Piping connections Evaporator water inlet/outlet (OD)				139.7mm	168.3mm			219.1mm					273mm					
Unit	Starting current Max A	A		0														
				366.7	401.1	433.8	454.5	470	507.6	547.1	592.9	642.8	675.5	732.6	793.9			
Unit	Running current Max A	A		491	472	517	527	579	618	655	702	787	902	992	1,090			
Power supply Phase/Frequency/Voltage			Hz/V	3~/50 /400														

Inverter screw with PLATINUM efficiency. Standard sound.

- › HFO R-1234ze(E) Refrigerant with Ozone Depletion Potential equal to zero and extremely low Global Warming Potential
- › New generation of air-cooled inverter series with extension of capacity range: Nominal capacity up to 1,600 kW
- › New single screw compressor geometry allowing performance optimization
- › Refrigerant cooled inverter mounted on compressor all across the range
- › Premium energy efficiency both at full and part load conditions
- › Best capacity with smallest footprint
- › Microchannel coils
- › Unique fully integrated active harmonic filtration solution
- › Performance monitoring
- › MicroTech 4 controller: sophisticated adaptive software logic for stable operating conditions

More details and final information can be found by scanning or clicking the QR codes.



EWAH-TZPSD



MicroTech 4



EWAD_H_S-TZ-D

			EWAH-TZPSD	225	265	295	340	395	420	490	500	540	545	615		
SEER				6.234	6.353	6.334	6.977	6.709	6.849	6.786	6.44	6.576	6.09	6.865		
Cooling capacity Nom. kW				227.3	266.6	293.6	336.7	392	421.5	848.9	502.6	538.7	541.2	612.4		
Power input Cooling Nom. kW				61.76	71.25	81.63	84.16	105.1	113.2	133.4	132.3	141.6	143.6	156.8		
Capacity control Method				Stepless												
Minimum capacity %				22	19	17	28	23	22	19	10	30	15			
EER				3.6	3.618	3.499	3.853	3.651	3.612	3.561	3.737	3.721	3.736	3.843		
IPLV				6.688	6.689	6.595	7.437	7.042	7.251	7.093	6.797	6.932	6.385	7.155		
Dimensions	Unit	Height	mm	2,553												
		Width	mm	2,238												
		Depth	mm	3,640	4,720		5,800			6,880		7,960	6,880	7,960		
Weight	Unit		kg	3,212	3,724		4,569		5,050	5,136	5,157	5,639	5,805	6,151		
		Operation weight	kg	3,242	3,759	3,764	4,614	4,624	5,110	5,201	5,227	5,714	5,880	6,236		
Air heat exchanger Type				Microchannel												
Compressor Type				Screw compressor												
Quantity				1						2		1	2			
Fan	Type			Direct propeller												
		Quantity		6	8	10			12		14	12	14			
		Air flow rate	Cooling Nom. l/s	33,930	45,240	56,540			67,848		79,170	67,848	79,170			
Sound power level Cooling Nom. dBA				97.5	98.1	102.6	95.7	98.7	100.1	104.6	100.6	100.9	99	96.6		
Sound pressure level Cooling Nom. dBA				77.74	77.83	82.3	75	77.94	78.89	83.39	79.43	79.35	77.82	75.06		
Operation range Air side Cooling Min.~Max. °CDB				-20 ~46												
Refrigerant Type/GWP				R-1234(ze)/7												
Charge kg				30	35	40	45	55	60	65	70	75		85		
Circuits Quantity				1						2		1	2			
Piping connections Evaporator water inlet/outlet (OD)				88.9mm				139.7mm				168.3mm	139.7mm	219.1mm		
Unit	Starting current Max A			0												
		Running current Max A		142.3	166.7	184.7	196.1	230.8	248	278	298.6	322.3	290.8	347.4		
		Max A		183	214	235	258	301	330	367	375	406	425	432		
Power supply	Phase/Frequency/Voltage		Hz/V	3~/50 /400												
	EWAH-TZPSD			645	700	770	845	900	960	C10	H10	H11	C12			
SEER				6.816	6.672	6.656	6.712	6.595	6.596	6.52	6.564	6.262	6.327			
Cooling capacity Nom. kW				640.9	697.3	768.3	847.6	901.3	958.2	1,006	1,068	1,163	1,216			
Power input Cooling Nom. kW				167.4	190.8	209.2	230.4	254.6	268.9	289.6	305.9	315.5	327.6			
Capacity control Method	Stepless			Stepless												
		Minimum capacity %		14	13	12	11		10					14		
		AER		3.782	3.642	3.648		3.528	3.54	3.462	3.469	3.7	3.712			
IPLV				7.157	6.992	6.965	7.134	6.932	6.912	6.746	6.815	6.562	7.068			
Dimensions	Unit	Height	mm	2,553												
		Width	mm	2,238												
		Depth	mm	7,960		9,040		10,120		11,200		12,280		13,360		
Weight	Unit		kg	6,151		6,722		7,256		8,050		8,573	9,242	9,723		
		Operation weight	kg	6,241	6,246	6,827	7,371	7,381	8,180	8,190	8,723	9,402	9,893			
Air heat exchanger Type				Microchannel												
Compressor Type				Screw compressor												
Quantity				2												
Fan	Type			Direct propeller												
		Quantity		14	16	18		20		22		24				
		Air flow rate	Cooling Nom. l/s	79,170	90,480	101,780		113,089		140,200		152,945				
Sound power level Cooling Nom. dBA				97.5	99.3	101	102.3	104.2	106.5	106.9	105.5	102.4	102.8			
Sound pressure level Cooling Nom. dBA				75.95	77.76	79.04	80.05	81.92	83.96	84.32	82.67	79.52	79.71			
Operation range Air side Cooling Min.~Max. °CDB				-20 ~46												
Refrigerant Type/GWP				R-1234(ze)/7												
Charge kg				90	95	105	115	125	130	140	150	160	170			
Circuits Quantity				2												
Piping connections Evaporator water inlet/outlet (OD)				219.1mm												
Unit	Starting current Max A			0												
		Running current Max A		365	403.1	437.5	473.2	507.8	539.6	569.4	603	612	638.1			
		Max A		458	505	558	609	647	694	731	779	875	923			
Power supply	Phase/Frequency/Voltage		Hz/V	3~/50 /400												


Inverter screw with PLATINUM efficiency. Reduced sound.

- › HFO R-1234ze(E) Refrigerant with Ozone Depletion Potential equal to zero and extremely low Global Warming Potential
- › New generation of air-cooled inverter series with extension of capacity range: Nominal capacity up to 1,600 kW
- › New single screw compressor geometry allowing performance optimization
- › Refrigerant cooled inverter mounted on compressor all across the range
- › Premium energy efficiency both at full and part load conditions
- › Best capacity with smallest footprint
- › Microchannel coils
- › Unique fully integrated active harmonic filtration solution
- › Performance monitoring
- › MicroTech 4 controller: sophisticated adaptive software logic for stable operating conditions

More details and final information can be found by scanning or clicking the QR codes.



EWAH-TZPRD



MicroTech 4



EWAD_H_S-TZ-D

			EWAH-TZPRD	225	265	295	340	395	420	490	500	540	545	615
SEER				6.176	6.335	6.289	7.018	6.627	6.824	6.728	6.458	6.426	6.091	6.484
Cooling capacity	Nom.	kW	225.2	264.6	291.2	333.9	389.2	419.1	481.2	497.4	533.5	536.5	604.9	
Power input	Cooling	Nom.	kW	61.76	71.25	81.63	84.16	105.1	113.2	133.4	132.3	141.6	143.6	156.8
Capacity control	Method													
	Minimum capacity	%	22	19	17	28	23	22	19	10		30	15	
EER				3.647	3.713	3.567	3.967	3.705	3.703	3.606	3.76	3.768	3.736	3.858
IPLV				6.699	6.688	6.583	7.472	7.129	7.273	7.127	6.826	6.955	6.407	7.285
Dimensions	Unit	Height	mm											
		Width	mm											
		Depth	mm	3,760	4,840		5,920			7,000		8,080	7,000	8,080
Weight	Unit		kg	3,332	3,844		4,689			5,170	5,256	5,277	5,759	5,925
	Operation weight	kg		3,242	3,759	3,764	4,614	4,624	5,110	5,201	5,227	5,714	5,880	6,236
Air heat exchanger	Type													
Compressor	Type													
	Quantity													
Fan	Type													
	Quantity			6	8	10				12		14	12	14
	Air flow rate	Cooling	Nom.	l/s	28,330	37,770	47,213			56,660		66,098	56,660	66,098
Sound power level	Cooling	Nom.	dBA	87.5	88.3	91.5	87.6	89.1	90.2	93.4	90.5	91	89.6	88.9
Sound pressure level	Cooling	Nom.	dBA	67.73	68.06	71.23	66.88	68.33	69.04	72.28	69.38	69.43	68.42	67.29
Operation range	Air side	Cooling	Min.~Max.	°CDB						-20 ~46				
Refrigerant	Type/GWP									R-1234(ze)/7				
	Charge	kg	30	35	40	45	55	60	65	70		75		85
	Circuits	Quantity					1				2	1	2	
Piping connections	Evaporator water inlet/outlet (OD)				88.9mm		139.7mm			168.3mm		139.7mm	219.1mm	
Unit	Starting current	Max	A							0				
	Running current	Cooling	Nom.	A	145.5	169.8	188.1	199.8	235.9	252.3	283.4	305.9	329.8	355.9
	current	Max	A	183	214	235	258	301	330	367	375	406	425	432
Power supply	Phase/Frequency/Voltage	Hz/V					3~/50 /400							

			EWAH-TZPRD	645	700	770	845	900	960	C10	H10	H11	C12
SEER				6.833	6.649	6.674	6.722	6.613	6.665	6.53	6.577	6.262	6.255
Cooling capacity	Nom.	kW	633.1	689	760.6	839.9	892.3	949.1	994.9	1,056	1,150	1,204	
Power input	Cooling	Nom.	kW	167.4	190.8	209.2	230.4	254.6	268.9	289.6	305.9	315.5	327.6
Capacity control	Method												
	Minimum capacity	%	14	13	12	11			10			14	
EER				3.783	3.612	3.636	3.646	3.504	3.53	3.435	3.452	3.644	3.675
IPLV				7.162	7.001	6.458	7.118	6.974	6.918	6.794	6.863	6.451	6.947
Dimensions	Unit	Height	mm							2,553			
		Width	mm							2,238			
		Depth	mm	8,080		9,160	10,240		11,320		12,400		13,480
Weight	Unit		kg	6,271		6,842	7,376		8,170		8,693	9,362	9,843
	Operation weight	kg		6,241	6,246	6,827	7,371	7,381	8,180	8,190	8,723	9,402	9,893
Air heat exchanger	Type									Microchannel			
Compressor	Type									Screw compressor			
	Quantity									2			
Fan	Type									Direct propeller			
	Quantity				14	16	18		20		22		24
	Air flow rate	Cooling	Nom.	l/s	66,098	75,540	84,983		94,425		103,868		113,320
Sound power level	Cooling	Nom.	dBA	89.2	90.1	91.2	92.3	93.5	95.4	95.7	94.8	92.6	93.1
Sound pressure level	Cooling	Nom.	dBA	67.65	68.52	69.33	70.02	71.3	72.9	73.2	71.92	69.81	69.96
Operation range	Air side	Cooling	Min.~Max.	°CDB						-20 ~46			
Refrigerant	Type/GWP									R-1234(ze)/7			
	Charge	kg	90	95	105	115	125	130	140	150	160		170
	Circuits	Quantity						2					
Piping connections	Evaporator water inlet/outlet (OD)				219.1mm					273mm			
Unit	Starting current	Max	A							0			
	Running current	Cooling	Nom.	A	374.4	414.8	449.1	484.8	521.2	552.9	584.1	617.4	631.3
	current	Max	A	458	505	558	609	647	694	731	779	875	923
Power supply	Phase/Frequency/Voltage	Hz/V					3~/50 /400						


Inverter screw cooling only with BLU efficiency. Standard sound.

- › Refrigerant R-513A
- › New generation of air-cooled inverter series with extension of capacity range: Nominal capacity up to 1,850 kW
- › New single screw compressor geometry allowing performance optimization
- › Refrigerant cooled inverter mounted on compressor all across the range
- › Premium energy efficiency both at full and part load conditions
- › Best capacity with smallest footprint
- › Microchannel coils
- › Unique fully integrated active harmonic filtration solution
- › Performance monitoring
- › MicroTech 4 controller: sophisticated adaptive software logic for stable operating conditions

More details and final information can be found by scanning or clicking the QR codes.



EWAS-TZBSD



MicroTech 4



EWAD_H_S-TZ-D

		EWAS-TZBSD	275	320	345	400	470	525	580	625	755	830	915		
SEER			4.3	4.4		4.6		4.7		4.6		4.7			
Cooling capacity	Nom.	kW	258.8	310.6	338.2	405.8	451.2	505.5	554.9	597.4	734	800.1	884.2		
Power input	Cooling	kW	97.8	106.4	122.7	145.2	170.8	178.3	210.4	244.8	246.3	284.8	319.3		
Capacity control	Method							Stepless							
	Minimum capacity	%	22	19	17	22	23	22	19	17	13	11	13		
EER			2,646	2,919	2,756	2,795	2,642	2,835	2,637	2,44	2,98	2,809	2,769		
IPLV			4.3	4.5	4.4	4.7		4.6		4.5	4.8		4.7		
Dimensions	Unit	Height	mm					2,553							
		Width	mm					2,238							
		Depth	mm	2,560		3,640			4,720			6,880			
Weight	Unit	kg	2,602		3,084		3,486		4,032			5,670	6,142		
	Operation weight	kg	2,677		3,169		3,583.7	3,593.7	4,160.1	4,170.1	4,175.1	6,055	6,065	6,748	
Air heat exchanger	Type							Microchannel							
Compressor	Type							Screw compressor							
	Quantity							1				2			
Fan	Type							Direct propeller							
	Quantity		4		6			8				12			
	Air flow rate	Cooling	Nom.	l/s	25,490		38,235		50,990			76,470			
Sound power level	Cooling	Nom.	dBA	97.4	97.9	100	97.3	96.7	97.7	98.1	100.5	99	100	99	
Sound pressure level	Cooling	Nom.	dBA	78.3	78.2	80.3	77.6	77	77.4	77.8	80.3	77.8	78.8	77.8	
Operation range	Air side	Cooling	Min.~Max.	°CDB				5 ~42							
Refrigerant	Type/GWP							R-513A/630							
	Charge	kg	35		45		55	65	70	80	85	105	115	125	
	Circuits	Quantity						1				2			
Piping connections	Evaporator water inlet/outlet (OD)				88.9mm			139.7mm			168.3mm	219.1mm			
Unit	Starting current	Max	A					0							
	Running current	Cooling	Nom.	A	190.1	207.1	228.7	262	300.2	315.2	362.8	413.9	457.4	515.3	568.4
	current	Max	A	220	262	284	346	362	400	457	464	600	668		
Power supply	Phase/Frequency/Voltage	Hz/V						3~/50 /400							
		EWAS-TZBSD	C10	H10	H11	C12	C13	C14	C15	H16	H17	H18	H19		
SEER					4.7				4.6		4.9	4.8	4.7	4.8	
Cooling capacity	Nom.	kW	953.9	1,050	1,127	1,197	1,293	1,359.6	1,483.5	1,606	1,688	1,799.6	1,868		
Power input	Cooling	kW	371.96	393.3	411.8	434.6	472.69	519.9	558.77	581.2	647.2	699.02	775.2		
Capacity control	Method							Stepless							
	Minimum capacity	%	11			10				13	12	11	10		
EER			2,565	2,67	2,737	2,754	2,735	2,615	2,655	2,763	2,608	2,574	2,41		
IPLV			4.7		4.8	4.7		4.6			5.2		5.1		
Dimensions	Unit	Height	mm					2,553							
		Width	mm					2,238							
		Depth	mm	6,880	7,960	9,040	10,120		11,200			12,280		13,360	
Weight	Unit	kg	6,142	6,816	7,297	7,779	8,260	8,581	9,920			10,323		10,805	
	Operation weight	kg	6,763	7,523	8,014	8,506	9,002	9,333	11,146	11,564	11,579	12,076	12,086		
Air heat exchanger	Type							Microchannel							
Compressor	Type							Screw compressor							
	Quantity							2							
Fan	Type							Direct propeller							
	Quantity		12		14	16	18	20		22			24		
	Air flow rate	Cooling	Nom.	l/s	76,470	89,233	101,980	114,705	127,450		140,195		152,940		
Sound power level	Cooling	Nom.	dBA	100	100.7	101	101.8	103.7	104.8	106.2	104.1	104.9	105.8	106.6	
Sound pressure level	Cooling	Nom.	dBA	78.8		79.1	79.6	81.2	82.3	83.4	81.2	82	82.7	83.5	
Operation range	Air side	Cooling	Min.~Max.	°CDB				5 ~42							
Refrigerant	Type/GWP							R-513A/630							
	Charge	kg	140		150	160	170	185	195	215	230	245	260	270	
	Circuits	Quantity						2							
Piping connections	Evaporator water inlet/outlet (OD)				219.1mm					273mm					
Unit	Starting current	Max	A					0							
	Running current	Cooling	Nom.	A	647.2	681.9	711.6	748.1	807.1	876.6	940.2	972.2	1,069	1,148	1,261
	current	Max	A	751	817	884	930	948	1,120	1,200	1,227	1,340	1,475	1,608	
Power supply	Phase/Frequency/Voltage	Hz/V						3~/50 /400							

Inverter screw with SILVER efficiency. Standard sound.

- › Refrigerant R-513A
- › New generation of air-cooled inverter series with extension of capacity range: Nominal capacity up to 1,850 kW
- › New single screw compressor geometry allowing performance optimization
- › Refrigerant cooled inverter mounted on compressor all across the range
- › Premium energy efficiency both at full and part load conditions
- › Best capacity with smallest footprint
- › Microchannel coils
- › Unique fully integrated active harmonic filtration solution
- › Performance monitoring
- › MicroTech 4 controller: sophisticated adaptive software logic for stable operating conditions

More details and final information can be found by scanning or clicking the QR codes.



EWAS-TZSSD



MicroTech 4



EWAD_H_S-TZ-D

			EWAS-TZSSD	285	325	380	430	495	520	535	555	585	595	645	650	705	760	
SEER				5.2	5.4	5.5	5.2	5.1	4.9	5.3	5	4.9	5.2	5	5.2	4.9	5	
Cooling capacity	Nom.	kW	284.9	329.3	374.3	426.2	487.5	522	529.7	553.9	583.2	585.6	645.1	635.1	702.3	758.2		
Power input	Cooling	Nom.	kW	89.25	103.6	120.5	138.8	161.5	172.1	170.5	188.8	206.6	200.1	214.8	231	249.4	239.4	
Capacity control	Method																	
	Minimum capacity	%	22	19	17	22	23	11	22	10	19	10	10	17	10	13		
EER			3.192	3.179	3.106	3.071	3.019	3.033	3.107	2.934	2.823	2.927	3.003	2.749	2.816	3.167		
IPLV			5.5	5.6	5.7	5.8	5.6	5.2	5.7	5.1	5.6	5.2	5.5	5.1	5.7			
Dimensions	Unit	Height	mm															
		Width	mm															
		Depth	mm	3,640		4,720				5,800			6,880	5,800	6,880	7,960		
Weight	Unit	kg	3,084	3,604	3,968	4,032	4,693	4,513	4,693	4,513	5,177	4,513	5,177	6,151				
	Operation weight	kg	3,164	3,697	3,702	4,070.7	4,155.1	5,033	4,646.1	5,038	5,043	4,651.1	5,522	4,661.1	5,527	6,536		
Air heat exchanger	Type																	
Compressor	Type																	
	Quantity																	
Fan	Type																	
	Quantity		6		8				10				12	10	12	14		
	Air flow rate	Cooling	Nom.	l/s	38,240		50,990			63,733			76,480	63,733	76,480	89,233		
Sound power level	Cooling	Nom.	dBA	97.8	98.3	100.2	97.7	97.1	99.3	98	99.5	100.7	98.4	100.9	100.7	103	99.2	
Sound pressure level	Cooling	Nom.	dBA	78	80	77.4	76.9	78.6	77.3	78.7	79.9	77.7	79.8	80	81.9	77.7		
Operation range	Air side	Cooling	Min.~Max.	°CDB					-20 ~42									
Refrigerant	Type/GWP									R-513A/630								
	Charge	kg	40	45	50	60	65	70	75		80		90	95	105			
	Circuits	Quantity			1			2	1	2	1	2	1	2				
Piping connections	Evaporator water inlet/outlet (OD)				88.9mm		139.7mm	168.3mm	139.7mm	168.3mm	139.7mm	168.3mm	139.7mm	168.3mm	168.3mm			
Unit	Starting current	Max	A							0								
	Running current	Cooling	Nom.	A	182.7	211.5	234.4	261.8	296.6	349.9	314.5	378.9	409.6	358.4	427.8	404.3	472.9	461.3
	Max	A		231	272	294	357	372	421	411	450	481	467	523	474	566	610	
Power supply	Phase/Frequency/Voltage	Hz/V							3~/50 /400									
			EWAS-TZSSD	835	960	C10	H10	H11	H12	H13	H14	H15	H16	H17	H18	H19		
SEER				5.2	5.3		5.2		5.3		5.4		5.2	5.5		5.4	5.3	5.1
Cooling capacity	Nom.	kW	832.7	948.8	1,001	1,043	1,149	1,268	1,359	1,465	1,542	1,638	1,756			1,837		
Power input	Cooling	Nom.	kW	274.7	321.4	354.4	375	408.9	436.8	477.3	526.1	516.5	577.2	627.5		695.5		
Capacity control	Method																	
	Minimum capacity	%	11	12		11			10			14		13	12	11	10	
EER			3.031	2.952	2.824	2.781	2.81	2.903	2.847	2.785	2.985	2.838	2.798		2.641			
IPLV			5.6	5.5	5.4	5.5	5.4		5.5		5.4	6.1	5.9	5.8	5.7	5.5		
Dimensions	Unit	Height	mm															
		Width	mm															
		Depth	mm		7,960			9,040	11,200			12,280				13,360		
Weight	Unit	kg	6,151	6,623	6,816	7,297	8,260	8,742	9,920	10,323						10,805		
	Operation weight	kg	6,546	7,239	7,244	7,518	8,014	8,992	9,489	11,136	11,549	11,564	12,066	12,076	12,086			
Air heat exchanger	Type																	
Compressor	Type																	
	Quantity																	
Fan	Type																	
	Quantity																	
	Air flow rate	Cooling	Nom.	l/s		89,233		101,908	127,467			140,213				152,960		
Sound power level	Cooling	Nom.	dBA	100.2	99.6	100.2	100.5	101	102.5	104.2	105.3	103.3	104.1	104.9	105.8	106.6		
Sound pressure level	Cooling	Nom.	dBA	78.7	78	78.7	78.9	79.1	79.9	81.3	82.5	80.5	81.2	81.8	82.7	83.5		
Operation range	Air side	Cooling	Min.~Max.	°CDB														
Refrigerant	Type/GWP																	
	Charge	kg	115	135	140	145	160	175	190	205	215	230	250	260	270			
	Circuits	Quantity																
Piping connections	Evaporator water inlet/outlet (OD)			168.3mm			219.1mm											
Unit	Starting current	Max	A							0								
	Running current	Cooling	Nom.	A	514.3	585.7	635	666.1	720.5	770.5	834.6	910.1	894.9	984.4	1,062	1,163		
	Max	A		679	706	761	789	884	948	1,187	1,156	1,124	1,227	1,351	1,475	1,608		
Power supply	Phase/Frequency/Voltage	Hz/V								3~/50 /400								

Inverter screw with GOLD efficiency. Standard sound.

- › Refrigerant R-513A
- › New generation of air-cooled inverter series with extension of capacity range: Nominal capacity up to 1,850 kW
- › New single screw compressor geometry allowing performance optimization
- › Refrigerant cooled inverter mounted on compressor all across the range
- › Premium energy efficiency both at full and part load conditions
- › Best capacity with smallest footprint
- › Microchannel coils
- › Unique fully integrated active harmonic filtration solution
- › Performance monitoring
- › MicroTech 4 controller: sophisticated adaptive software logic for stable operating conditions

More details and final information can be found by scanning or clicking the QR codes.



EWAS-TZXSD



MicroTech 4



EWAD_H_S-TZ-D

			EWAS-TZXSD		295	345	380	440	515	525	565	565	610	635	670	705	725	760	
SEER					5.2	5.4	5.5	5.2	5.1	5	5.3	4.9	5	5.2	4.9	5.2	5	4.9	
Cooling capacity	Nom.	kW			293.5	344.9	377.1	435.9	506.6	524.4			560.5	610.4	626.7	665.8	696.1	719.7	749.1
Power input	Cooling	kW			94.89	108.5	124.1	127.6	159.3	155			171.5	187.8	202.4	214.2	220.6	233.6	248.3
Capacity control	Method																		
	Minimum capacity	%			22	19	17	28	23	13	22	12	11	19	10	30	10	28	
EER					3.093	3.179	3.039	3.416	3.18	3.383			3.268	3.25	3.096	3.108	3.155	3.081	3.017
IPLV					5.8	6.1	5.9	6.3	6.1	6	6.5	5.9	6	6.2	5.8	5.6	5.9	5.5	
Dimensions	Unit	Height	mm																
		Width	mm																
		Depth	mm		3,640	4,720		5,800			6,880		7,960	6,880	7,960	6,880	7,960	6,880	
Weight	Unit		kg		3,255	3,775		4,569		5,348	5,136	5,348	5,829	5,136	5,829	5,805	5,946	5,805	
	Operation weight	kg			3,335	3,868	3,873	4,687.1	4,697.1	5,673	5,287.3	5,683	6,169	5,297.3	6,174	5,976.3	6,344	5,986.3	
Air heat exchanger	Type																		
Compressor	Type																		
	Quantity																		
Fan	Type																		
	Quantity				6	8		10			12		14	12	14	12	14	12	
	Air flow rate	Cooling	Nom.	l/s	33,930	45,240		56,540		67,860	68,280	67,860	79,170	68,280	79,170	68,280	79,170	68,280	
Sound power level	Cooling	Nom.	dBA		97.5	98.1	102.6	95.7	97.5		100.1	100.3	100.6	104.6	100.9	99	102.3	99.8	
Sound pressure level	Cooling	Nom.	dBA		79.9	81.8	82.8	74.6	75.8	78.9	76.2	80.2	81.2	76.6	83.3	77.8	83.8	78.6	
Operation range	Air side	Cooling	Min.~Max.	°CDB							-20 ~42								
Refrigerant	Type/GWP																		
	Charge	kg			40	45	50	60		70	75	80		85	90	95	100	105	
	Circuits	Quantity									1	2	1	2	1	2	1	2	
Piping connections	Evaporator water inlet/outlet (OD)										88.9mm	139.7mm	168.3mm	139.7mm	168.3mm	139.7mm	168.3mm	139.7mm	
Unit	Starting current	Max	A									0							
	Running current	Cooling	Nom.	A	198.1	227.3	247	258.3	305.8	334.1		331		397.7	377.1	443.2	403.7	464.7	444.5
	current	Max	A		224	261	289	314	342	389	404	429	457	452	498	520	535	568	
Power supply	Phase/Frequency/Voltage	Hz/V										3~/50 /400							
			EWAS-TZXSD		805	880	950	C10	H10	H11	C12	H12	H13	H14	H15	H16	H17		
SEER					5.2	5.3		5.2		5.3		5.4		5.2	5.5		5.4	5.3	5.1
Cooling capacity	Nom.	kW			794.9	873.2	941.6	988.1	1,052	1,122	1,183	1,267.2	1,344	1,442	1,551	1,645	1,734		
Power input	Cooling	kW			246.2	266.2	300.2	310.7	346.2	357.9	393.7	426.7	452.1	446.3	503.1	562.8	628.6		
Capacity control	Method																		
	Minimum capacity	%			10	14	13	12		11			10		15	14	13	12	
EER					3.229	3.28	3.137	3.18	3.039	3.135	3.005	2.97	2.973	3.231	3.083	2.923	2.759		
IPLV					6	6.4	6.2	6.3	6.1	6.3	6.1		6	6.1	6.2	6.1	5.9		
Dimensions	Unit	Height	mm																
		Width	mm																
		Depth	mm																
Weight	Unit		kg		6,904	7,160		7,642			8,316		9,655						
	Operation weight	kg			7,495	7,761	7,771	8,258	8,268	9,028	9,038	9,053	10,856	12,016	12,031	12,046	12,061		
Air heat exchanger	Type																		
Compressor	Type																		
	Quantity																		
Fan	Type																		
	Quantity																		
	16										18								
	Air flow rate	Cooling	Nom.	l/s		90,480		101,772				113,080		124,388					
Sound power level	Cooling	Nom.	dBA		104.6	98.4	100.3	101	102.3	102.9	105.2	107.5	106.1	102	102.8	103.7	104.5		
Sound pressure level	Cooling	Nom.	dBA		83.9	76.1	76.5	76.8	77.5	77.6	77.9	78	79.1	78.9	79.7	80.5	81.4		
Operation range	Air side	Cooling	Min.~Max.	°CDB							-20 ~42								
Refrigerant	Type/GWP																		
	Charge	kg			110	120	130	135	145	155	165	180	190	200	215	230	245		
	Circuits	Quantity										2							
Piping connections	Evaporator water inlet/outlet (OD)											219.1mm							
Unit	Starting current	Max	A									0							
	Running current	Cooling	Nom.	A	466.5	520.3	571.1	592.9	645.8	669.5	722.6	744.2	817.8	814.6	898.5	986.3	1,083		
	current	Max	A		573	626	683	720	782	744	803	851	899	997	1,103	1,217	1,330		
Power supply	Phase/Frequency/Voltage	Hz/V										3~/50 /400							

Inverter screw with GOLD efficiency. Reduced sound.

- › Refrigerant R-513A
- › New generation of air-cooled inverter series with extension of capacity range: Nominal capacity up to 1,850 kW
- › New single screw compressor geometry allowing performance optimization
- › Refrigerant cooled inverter mounted on compressor all across the range
- › Premium energy efficiency both at full and part load conditions
- › Best capacity with smallest footprint
- › Microchannel coils
- › Unique fully integrated active harmonic filtration solution
- › Performance monitoring
- › MicroTech 4 controller: sophisticated adaptive software logic for stable operating conditions

More details and final information can be found by scanning or clicking the QR codes.



EWAS-TZXRD



MicroTech 4



EWAD_H_S-TZ-D

		EWAS-TZXRD		295	345	380	440	515	525	565	565	610	635	670	705	725	760																											
Capacity control	Method			Stepless																																								
Minimum capacity		% %		22	19	17	28	23	13	22	12	11	19	10	30	10	28																											
Dimensions	Unit	Height		mm mm													2,553																											
	Width		mm mm														2,238																											
	Depth		mm mm														2,238																											
Weight	Unit	kg kg		3,375	3,895	4,689	5,468	5,256	5,468	5,949	5,256	5,949	5,417.3	6,289	5,417.3	6,294	6,096.3	6,464 6,106.3																										
	Operation weight		kg kg														6,066 5,925																											
Air heat exchanger	Type	Microchannel																																										
Compressor	Type	Screw compressor																																										
	Quantity		1		2		1		2		1		2		1		2																											
Fan	Type	Direct propeller																																										
	Quantity		6		8		10		12		14		12		14		12																											
Air flow rate		Cooling	Nom.	I/s	28,330	37,770	47,213	56,660		66,098		56,660		66,098		56,660		66,098																										
Sound power level	Cooling	Nom.	dBA	87.5	88.3	91.5	87.6	88.4	90.2		90.3		90.8		93.4		91		89.6		91.9		90.1																					
Sound pressure level	Cooling	Nom.	dBA	67.7	68.1	71.2	66.9	67.7	69		69.2		72.3		69.4		68.4		70.3		68.9																							
Operation range	Air side	Cooling	Min.~Max.	°CDB	-20 ~ 42																																							
Refrigerant	Type/GWP	R-134a/630																																										
	Charge	kg	40	45	50	60	70	75	80	85	90	95	100	100	105	105																												
	Circuits	Quantity	1		2		1		2		1		2		1		2																											
Piping connections	Evaporator water inlet/outlet (OD)	88.9mm 139.7mm 168.3mm 139.7mm																																										
Unit	Starting current Max	A	0																																									
	Running current Max	A	224	261	289	314	342	389	404	429	457	452	498	520	535	568	568																											
Power supply	Phase/Frequency/Voltage	Hz/V	3~/50 / 400																																									
		EWAS-TZXRD		805	880	950	C10	H10	H11	C12	H12	H13	H14	H15	H16	H17																												
Capacity control	Method	Stepless																																										
Minimum capacity		%		10	14	13	12	11	10		15		14		13		12																											
Dimensions	Unit	Height		mm mm														2,553																										
	Width		mm mm														2,238																											
	Depth		mm mm														2,238																											
Weight	Unit	kg kg		9,040		10,120		11,200		12,280		13,360		10,925		10,925		10,925																										
	Operation weight		kg kg														113,320																											
Air heat exchanger	Type	Microchannel																																										
Compressor	Type	Screw compressor															2																											
	Quantity		2														2																											
Fan	Type	Direct propeller															24																											
	Quantity		16		18		20		22		103,868		113,320		113,320		113,320																											
Air flow rate		Cooling	Nom.	I/s	75,540	84,983		94,425		97,775		102,868		102,868		102,868		102,868																										
Sound power level	Cooling	Nom.	dBA	93.7	89.9	90.9	91.5	92.3	92.8	94.4	96.3	95.2	92.6	93.1	93.6	94.2	94.2																											
Sound pressure level	Cooling	Nom.	dBA	71.8	68	69	69.3	70	70.3	71.9	73.7	72.4	69.5	70	70.5	71.1	71.1																											
Operation range	Air side	Cooling	Min.~Max.	°CDB	-20 ~ 42																																							
Refrigerant	Type/GWP	R-134a/630															2																											
	Charge	kg	110	120	130	135	145	155	165	180	190	200	215	230	245	245																												
	Circuits	Quantity	2														2																											
Piping connections	Evaporator water inlet/outlet (OD)	219.1mm 273mm															273mm																											
Unit	Starting current Max	A	0															0																										
	Running current Max	A	573	626	683	720	782	744	803	851	899	997	1,103	1,217	1,330	1,330																												
Power supply	Phase/Frequency/Voltage	Hz/V	3~/50 / 400															1,330																										

Inverter screw with PLATINUM efficiency. Standard sound.

- › Refrigerant R-513A
- › New generation of air-cooled inverter series with extension of capacity range: Nominal capacity up to 1,850 kW
- › New single screw compressor geometry allowing performance optimization
- › Refrigerant cooled inverter mounted on compressor all across the range
- › Premium energy efficiency both at full and part load conditions
- › Best capacity with smallest footprint
- › Microchannel coils
- › Unique fully integrated active harmonic filtration solution
- › Performance monitoring
- › MicroTech 4 controller: sophisticated adaptive software logic for stable operating conditions

More details and final information can be found by scanning or clicking the QR codes.



EWAS-TZPSD



MicroTech 4



EWAD_H_S-TZ-D

			EWAS-TZPSD	285	330	370	405	450	490	530	575	615	675	735				
SEER				5.9	6	5.9	6.3	6.2	6	5.9	5.9	5.9	5.8					
Cooling capacity Nom. kW				287.6	333.2	370.2	405.1	450.1	488.4	531.7	573.6	620.2	677.1	732.9				
Power input Cooling Nom. kW				81.89	96.83	111.6	110.6	123.5	137.5	150.8	167.7	180.9	205.7	223.4				
Capacity control Method				Stepless														
Minimum capacity %				23	20	18	30	28	25	13	12	11	10					
EER				3.512	3.441	3.317	3.663	3.645	3.552	3.526	3.42	3.428	3.292	3.281				
IPLV				6.5		6.4	7	7.3	7.2	6.4	6.3	6.1	6.2					
Dimensions	Unit	Height	mm	2,553														
		Width	mm	2,238														
		Depth	mm	4,720	5,800		6,880		7,960		9,040							
Weight	Unit	kg	3,775	4,256		5,050	5,136		5,829		6,311		6,427					
		kg	3,863	4,349	4,354	5,163.1	5,272.3	5,277.3	6,159	6,164	6,651	6,661	6,825					
Air heat exchanger Type				Microchannel														
Compressor Type				Screw compressor														
Quantity				1				2										
Fan	Type	Direct propeller																
		Quantity		8	10		12		14		16							
		Air flow rate Cooling Nom. l/s	45,240	56,540		67,848		79,170		90,480								
Sound power level	Cooling Nom.	dBA	97.5	98.1	100.4	94.7	96	97.7	100.2	100.4	100.7	101	102.3					
Sound pressure level	Cooling Nom.	dBA	78.2	81	81.9	74.2	74.5	74.9	78.6	79.9	80.9	83	83.4					
Operation range	Air side Cooling Min.~Max.	°CDB	-20 ~ 42															
Refrigerant	R-513A/630																	
	Type/GWP	kg	40	45	50	55	60	65	75	80	85	95	100					
	Circuits	Quantity	1											2				
Piping connections Evaporator water inlet/outlet (OD)			88.9mm															
Unit	Starting current Max	A	0															
	Running current Max	A	181.1	212.7	238.2	242	258.8	280	332	361.5	391.2	434	459.1					
Power supply Phase/Frequency/Voltage			kg	220	258	285	293	352	404	399	429	468	508	535				
			Hz/V	3~/50 /400														
			EWAS-TZPSD	810	890	960	C10	H10	H11	C12	H12	H13	H14	H15				
SEER				6.1	6.3	6.1	6.2	6.1		6	6.1	6	5.9	5.7				
Cooling capacity Nom. kW				810	884.2	954	1,001	1,067	1,110	1,197	1,288	1,363	1,443	1,552				
Power input Cooling Nom. kW				238.8	256.7	288.7	298.9	331.9	343.6	434.6	410.7	433.6	435.6	492.1				
Capacity control	Method	Stepless																
		Minimum capacity %		10	14	13	12	11		10			15	14				
		AER		3.392	3.444	3.304	3.349	3.215	3.231	2.754	3.136	3.143	3.313	3.154				
IPLV				6.5	6.8	6.6		6.3	6.5	6.4	6.3	6.4	6.3	6.4				
Dimensions	Unit	Height	mm	2,553														
		Width	mm	2,238														
		Depth	mm	10,120				11,200		12,280		13,360						
Weight	Unit	kg	7,385	7,642		8,123	8,798		9,655	10,136	10,805							
		kg	7,976	8,243	8,253	8,744	8,754	9,515	9,520	10,846	11,337	12,021	12,036					
Air heat exchanger Type				Microchannel														
Compressor Type				Screw compressor														
Fan	Type	2																
		Quantity		18				20		22		24						
		Air flow rate Cooling Nom. l/s		101,772				113,080		140,200		152,945						
Sound power level	Cooling Nom.	dBA	104.6	98.6	100.4	101.1	102.4	103	105.2	107.5	106.2	102	102.8					
Sound pressure level	Cooling Nom.	dBA	83.6	75.9	76.3	76.6	77.3	77.4	77.7	77.9	78.9		79.7					
Operation range	Air side Cooling Min.~Max.	°CDB	-20 ~ 42															
Refrigerant	R-513A/630																	
	Type/GWP	kg	110	120	130	140	150	160	165	180	190	205	220					
	Circuits	Quantity	2															
Piping connections Evaporator water inlet/outlet (OD)			219.1mm												273mm			
Unit	Starting current Max	A	0															
	Running current Max	A	485.2	511.9	559.9	581.2	630.4	653.8	748.1	756.2	796.3	798.5	882					
Power supply Phase/Frequency/Voltage			kg	573	616	672	709	761	796	845	893	951	1,039	1,135				


Inverter screw with PLATINUM efficiency. Reduced sound.

- › Refrigerant R-513A
- › New generation of air-cooled inverter series with extension of capacity range: Nominal capacity up to 1,850 kW
- › New single screw compressor geometry allowing performance optimization
- › Refrigerant cooled inverter mounted on compressor all across the range
- › Premium energy efficiency both at full and part load conditions
- › Best capacity with smallest footprint
- › Microchannel coils
- › Unique fully integrated active harmonic filtration solution
- › Performance monitoring
- › MicroTech 4 controller: sophisticated adaptive software logic for stable operating conditions

More details and final information can be found by scanning or clicking the QR codes.



EWAS-TZPRD



MicroTech 4



EWAD_H_S-TZ-D

		EWAS-TZPRD	285	330	370	405	450	490	530	575	615	675	735		
Capacity control	Method							Stepless							
Minimum capacity		%	23	20	18	30	28	25	13	12	11	10			
Dimensions	Unit	Height	mm					2,553							
		Width	mm					2,238							
		Depth	mm	4,720	5,800		6,880		7,960		9,040				
Weight	Unit	kg	3,895	4,376	5,170	5,256	5,949		6,431		6,547				
	Operation weight	kg	3,983	4,469	4,474	5,283.1	5,392.3	5,397.3	6,279	6,284	6,771	6,781	6,945		
Air heat exchanger	Type							Microchannel							
Compressor	Type							Screw compressor							
Fan	Quantity					1				2					
	Type							Direct propeller							
	Quantity					8		10		12		14			
Air flow rate Cooling		Nom.	l/s	37,770	47,213		56,660		66,098		75,540				
Sound power level	Cooling	Nom.	dBA	88	88.7	90.1	87.8	88.2	88.9	90.6	90.7	91.1	91.3	92.1	
Sound pressure level	Cooling	Nom.	dBA	67.7	68	69.4	66.6	67	67.8	69	69.1	69.2	69.4	70.2	
Operation range	Air side	Cooling	Min.~Max.	°CDB			-20 ~ 42								
Refrigerant	Type/GWP							R-134a/630							
	Charge	kg	40	45	50	55	60	65	75	80	85	95	100		
	Circuits	Quantity			1				2						
Piping connections	Evaporator water inlet/outlet (OD)					88.9mm		139.7mm		168.3mm					
Unit	Starting current Max	A					0								
	Running current Max	A	220	258	285	293	352	404	399	429	468	508	535		
Power supply	Phase/Frequency/Voltage	Hz/V					3~/50 /400								
		EWAS-TZPRD	810	890	960	C10	H10	H11	C12	H12	H13	H14	H15		
Capacity control	Method							Stepless							
Minimum capacity		%	10	14	13	12	11			10		15			
Dimensions	Unit	Height	mm					2,553							
		Width	mm					2,238							
		Depth	mm	10,120		11,200		12,280		13,360					
Weight	Unit	kg	7,505	7,762			8,243		8,918		9,775		10,256		
	Operation weight	kg	8,096	8,363	8,373	8,864	8,874	9,635	9,640	10,966	11,457	12,141	12,156		
Air heat exchanger	Type					Microchannel									
Compressor	Type					Screw compressor				2					
Fan	Quantity					Direct propeller									
	Type					18		20		22		24			
	Quantity					84,983		94,425		103,868		113,320			
Sound power level	Cooling	Nom.	dBA	93.9	90.3	91.2	91.8	92.5	93	94.5	96.4	95.4	92.6	93.1	
Sound pressure level	Cooling	Nom.	dBA	71.6	68.1	68.9	69.2	69.9	70.2	71.7	73.5	72.2	69.5	70	
Operation range	Air side	Cooling	Min.~Max.	°CDB			-20 ~ 42								
Refrigerant	Type/GWP							R-134a/630							
	Charge	kg	110	120	130	140	150	160	165	180	190	205	220		
	Circuits	Quantity					2								
Piping connections	Evaporator water inlet/outlet (OD)					219.1mm				273mm					
Unit	Starting current Max	A					0								
	Running current Max	A	573	616	672	709	761	796	845	893	951	1,039	1,135		
Power supply	Phase/Frequency/Voltage	Hz/V					3~/50 /400								



Air cooled scroll chiller, standard efficiency, standard/low sound

- › First R-32 air cooled chiller with Scroll compressors in the market
- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- › One or two truly independent refrigerant circuits for outstanding reliability
- › MicroTech 4 controller with superior control logic and easy interface
- › Low operating cost and extended operating life thanks to the careful design aimed to optimize the energy efficiency of the chillers and to improve installation profitability, effectiveness and economical management
- › Fan speed modulation to ensure precise airflow control and optimized condensing temperature
- › Possible to set up detailed time bands to reduce fan rotation speed and therefore sound emission
- › Thanks to the Dynamic Condensing Pressure Management, the chiller controller adjusts the condensing pressure set-point to minimize the overall chiller power input



More details and final information can be found by scanning or clicking the QR codes.



EWAT-B-SSB



EWAT-B-SLB

Cooling Only			EWAT-B-SSB/SLB	085	115	135	155	175	195	205	215
Space cooling	A Condition 35°C Pdc	kW	80.92	108.97	131.42	158.15	174.93	191.39	210.53	217.08	
	$\eta_{s,c}$	%	161	173		161		176.2	170.6	173	161
	$\eta_{s,c} + VFDFAN$	%					-				
SEER			4.1	4.4		4.1		4.48	4.34	4.4	4.1
SEER + VFDFAN							-				
Cooling capacity	Nom.	kW	81	109	131	158	175	191	211	217	
Power input	Cooling Nom.	kW	31.8	38.5	49.8	61.9	67.8	69.5	80	85.8	
Capacity control	Method						Step				
	Minimum capacity	%	50	38	50	25	38	21	19	50	
EER			2.55	2.83	2.64	2.55	2.58	2.75	2.63	2.53	
IPLV			4.65	4.92	4.46	4.68	4.78	4.84	4.86	4.7	
EER + VFDFAN							-				
IPLV + VFDFAN							-				
Dimensions	Unit	Height	mm		1,801		1,822	1,801		1,822	
		Width	mm				1,204				
		Length	mm	2,120	2,660	3,570	3,180		4,170		3,780
Weight (SSB)	Unit	kg	681	767	811	1,007	984	1,166	1,158	1,184	
	Operation weight	kg	686	773	820	1,014	996	1,177	1,169	1,200	
Weight (SLB)	Unit	kg	691	777	821	1,028	994	1,187	1,179	1,194	
	Operation weight	kg	696	783	830	1,035	1,006	1,198	1,190	1,210	
Water heat exchanger	Type					Brazed plate					
	Water volume	l	5	6	9	7	12		11	16	
	Water flow rate Cooling Nom.	l/s	3.9	5.2	6.3	7.6	8.4		9.1	10.1	10.4
	Water Cooling Nom. pressure drop	kPa	27.3	34.4	26.5	64.2	41.7		45.9	54.4	41.4
Air heat exchanger	Type					Microchannel					
Compressor	Type					Scroll compressor					
	Quantity			2		4	2		4		2
Fan	Type					Direct propeller					
	Quantity		4	6	8			10			
	Air flow rate Nom.	l/s	6,022	9,036	13,354	12,023		16,710		15,057	
	Speed	rpm				1,360					
Sound power level (SSB) Cooling Nom.	dBA	84.8	88.2	89.7	87.8	91.8	89.9	90.9	93.2		
Sound power level (SLB) Cooling Nom.	dBA	83.7	86.2	87	86.7	88.8	88.1	88.7	90		
Sound pressure level (SSB) Cooling Nom.	dBA	67.4	70.5	72	69.5	73.8	71.3	72.3	74.8		
Sound pressure level (SLB) Cooling Nom.	dBA	66.3	68.5	69.3	68.4	70.7	69.5	70.1	71.6		
Refrigerant	Type/GWP					R-32/675					
	Charge (SSB)	kg	7.1	8.4	12.4	10.7	14.1	14.4	12.7		
	Charge (SLB)	kg	7.1	8.2	12.4	10.7	14	13.4	12.7		
	Circuits Quantity			1	2	1		2		1	
Piping connections	Evaporator water inlet/outlet (OD)			76.1		88.9	76.1		88.9		76.1
Unit	Starting current Max	A	213	313	324	284	462	384	395	498	
	Running current Max	A	59	69	83	108	113	117	131	142	
	Power supply Phase/Frequency	Hz				3~/50					

Air cooled scroll chiller, standard efficiency, reduced sound

- › First R-32 air cooled chiller with Scroll compressors in the market
- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- › One or two truly independent refrigerant circuits for outstanding reliability
- › MicroTech 4 controller with superior control logic and easy interface
- › Low operating cost and extended operating life thanks to the careful design aimed to optimize the energy efficiency of the chillers and to improve installation profitability, effectiveness and economical management
- › Fan speed modulation to ensure precise airflow control and optimized condensing temperature
- › Possible to set up detailed time bands to reduce fan rotation speed and therefore sound emission
- › Thanks to the Dynamic Condensing Pressure Management, the chiller controller adjusts the condensing pressure set-point to minimize the overall chiller power input



More details and final information
can be found by scanning or
clicking the QR codes.



EWAT-B-SRB

Cooling Only		EWAT-B-SRB		085	115	135	155	175	195	205	215		
Space cooling	A Condition 35°C Pdc	kW	76.49	105	123.88	150.13	164.87	181.31	200.51	203.5			
	ηs,c	%	161	173		161	166.2	162.2	167.8	161			
SEER			4.1	4.4		4.1	4.23	4.13	4.27	4.1			
Cooling capacity	Nom.	kW	76	105	124	150	165	181	201	204			
Power input	Cooling Nom.	kW	33.7	40.3	53	65.9	73	73.2	84.6	91.9			
Capacity control	Method						Step						
	Minimum capacity	%	50	38	50	25	38	21	19	50			
EER			2.27	2.61	2.34	2.28	2.26	2.48	2.37	2.21			
IPLV			4.67	4.97	4.5	4.63	4.74	4.64	4.91	4.66			
Dimensions	Unit	Height	mm	1,801			1,822	1,801	1,822				
		Width	mm				1,204						
		Length	mm	2,120	2,660		3,570	3,180	4,170	3,780			
Weight	Unit	kg	691	777	821	1,028	994	1,187	1,179	1,194			
		Operation weight	kg	696	783	830	1,035	1,006	1,198	1,190	1,210		
Water heat exchanger	Type			Brazed plate									
	Water volume	l	5	6	9	7	12		11	16			
	Water flow rate Cooling Nom.	l/s	3.7	5	5.9	7.2	7.9	8.7	9.6	9.7			
	Water pressure drop	KPa	24.6	32.2	23.8	58.5	37.5	41.6	49.9	36.8			
Air heat exchanger	Type			Microchannel									
	Type			Scroll compressor									
	Quantity			2		4	2		4	2			
Fan	Type			Direct propeller									
	Quantity			4	6		8		10				
	Air flow rate Nom.	l/s	4,929	7,396		11,352	9,838	14,202		12,325			
Sound power level	Speed	rpm		1,200									
	Cooling Nom.	dBA	78.6	82.5	84.1	81.6	86.3	83.9	85.2	87.8			
	Sound pressure level Cooling Nom.	dBA	61.2	64.7	66.4	63.3	68.3	65.3	66.6	69.4			
Refrigerant	Type/GWP			R-32/675									
	Charge	kg	7.1	8.4		13	10.7	13.9	14.4	12.3			
	Circuits Quantity			1		2	1	2		1			
Piping connections		Evaporator water inlet/outlet (OD)		76.1		88.9	76.1	88.9		76.1			
Unit	Starting current	Max	A	213	313	324	284	462	384	395	498		
	Running current	Cooling Nom.	A	62	71	87	115	119	123	139	151		
	Power supply	Phase/Frequency	Hz				3~50			167	168		

Air cooled scroll chiller, high efficiency, standard/low sound

- › First R-32 air cooled chiller with Scroll compressors in the market
- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- › One or two truly independent refrigerant circuits for outstanding reliability
- › MicroTech 4 controller with superior control logic and easy interface
- › Low operating cost and extended operating life thanks to the careful design aimed to optimize the energy efficiency of the chillers and to improve installation profitability, effectiveness and economical management
- › Fan speed modulation to ensure precise airflow control and optimized condensing temperature
- › Possible to set up detailed time bands to reduce fan rotation speed and therefore sound emission
- › Thanks to the Dynamic Condensing Pressure Management, the chiller controller adjusts the condensing pressure set-point to minimize the overall chiller power input

More details and final information can be found by scanning or clicking the QR codes.



EWAT-B-XSB



EWAT-B-XLB

Cooling Only			EWAT-B-XSB/XLB	085	115	145	180	185
Space cooling	A Condition 35°C Pdc	kW	87.9	113.89	143.48	179.01	182.67	
	$\eta_{s,c}$	%	167	183	175	-	175.8	
	$\eta_{s,c} + VFDFAN$	%		-		181.8	-	
SEER			4.25	4.65	4.45	4.38	4.47	
SEER + VFDFAN				-		4.62	-	
Cooling capacity	Nom.	kW	88	114	143	179	183	
Power input	Cooling Nom.	kW	28.8	36.6	44.4	57	63.6	
Capacity control	Method				Step			
	Minimum capacity	%	50	38	50	25	38	
EER			3.05	3.12	3.23	3.14	2.87	
IPLV			4.83	5	4.82	4.65	4.74	
EER + VFDFAN				-		3.13	-	
IPLV + VFDFAN				-		5.11	-	
Dimensions	Unit	Height	mm	1,801		1,822	2,540	1,822
		Width	mm	1,204			2,236	1,204
		Length	mm	2,660	3,180	3,780	2,326	3,780
Weight (XSB)	Unit	kg	737	830	949	1,633	1,066	
	Operation weight	kg	742	836	958	1,644	1,078	
Weight (XLB)	Unit	kg	747	840	959	1,736	1,076	
	Operation weight	kg	752	846	968	1,747	1,088	
Water heat exchanger	Type			Brazed plate				
	Water volume	l	5	6	9	11	12	
	Water flow rate Cooling Nom.	l/s	4.2	5.4	6.9	8.6	8.7	
	Water Cooling Nom. pressure drop	kPa	31.6	37.3	31	40.7	45.1	
Air heat exchanger	Type			Microchannel				
Compressor	Type			Scroll compressor				
	Quantity			2		4	2	
Fan	Type			Direct propeller				
	Quantity		6	8	10	4	10	
	Air flow rate Nom.	l/s	9,036	12,023	15,057	20,306	15,057	
	Speed	rpm		1,360		900	1,360	
Sound power level (XSB)	Cooling Nom.	dBA	86	88.8	90.5	91.2	92.1	
Sound power level (XLB)	Cooling Nom.	dBA	85.2	87.1	88.5	90.6	89.3	
Sound pressure level (XSB)	Cooling Nom.	dBA	68.3	70.8	72.2	72.3	73.7	
Sound pressure level (XLB)	Cooling Nom.	dBA	67.5	69.1	70.1	71.6	70.9	
Refrigerant	Type/GWP			R-32/675				
	Charge (XSB)	kg	8.6	9.7	10.7	19.4	11.2	
	Charge (XLB)	kg	8.6	9.4	11.2	18.8	11.2	
	Circuits	Quantity		1		2	1	
Piping connections	Evaporator water inlet/outlet (OD)			76.1		88.9	76.1	
Unit	Starting current	Max	A	215	315	328	290	464
	Running current	Cooling Nom.	A	56	67	78	110	108
	Max	A	75	87	100	149	134	
Power supply	Phase/Frequency	Hz			3~/50			

Air cooled scroll chiller, high efficiency, reduced sound

- › First R-32 air cooled chiller with Scroll compressors in the market
- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- › One or two truly independent refrigerant circuits for outstanding reliability
- › MicroTech 4 controller with superior control logic and easy interface
- › Low operating cost and extended operating life thanks to the careful design aimed to optimize the energy efficiency of the chillers and to improve installation profitability, effectiveness and economical management
- › Fan speed modulation to ensure precise airflow control and optimized condensing temperature
- › Possible to set up detailed time bands to reduce fan rotation speed and therefore sound emission
- › Thanks to the Dynamic Condensing Pressure Management, the chiller controller adjusts the condensing pressure set-point to minimize the overall chiller power input



More details and final information can be found by scanning or clicking the QR codes.



EWAT-B-XRB

Cooling Only		EWAT-B-XRB		085	115	145	180	185
Space cooling	A Condition 35°C Pdc	kW	81.86	108.59	135.62	168.03	166.16	
	$\eta_{s,c}$	%	213.28	179.4	166.6	177	164.6	
SEER			4.13	4.56	4.24	4.5	4.19	
Cooling capacity	Nom.	kW	82	109	136	168	166	
Power input	Cooling Nom.	kW	30.8	38.9	46.9	59.1	70.5	
Capacity control	Method				Step			
	Minimum capacity	%	50	38	50	25	38	
EER			2.66	2.79	2.89	2.84	2.36	
IPLV			4.74	5.1	4.76	5.04	4.72	
Dimensions	Unit	Height	mm	1,801	1,822	2,540	1,822	
		Width	mm		1,204	2,236	1,204	
		Length	mm	2,660	3,180	3,780	3,780	
Weight	Unit	kg	747	840	959	1,736	1,076	
	Operation weight	kg	752	846	968	1,747	1,088	
Water heat exchanger	Type				Brazed plate			
	Water volume	l	5	6	9	11	12	
	Water flow rate Cooling Nom.	l/s	3.9	5.2	6.5	8	7.9	
	Water Cooling Nom. pressure drop	kPa	27.8	34.2	28	36.3	38	
	Air heat exchanger Type				Microchannel			
Compressor	Type				Scroll compressor			
	Quantity			2		4	2	
Fan	Type				Direct propeller			
	Quantity		6	8	10	4	10	
	Air flow rate Nom.	l/s	6,673	8,896	11,122	15,054	11,122	
	Speed	rpm		1,108		700	1,108	
Sound power level	Cooling Nom.	dBA	77.9	81.9	84	84.2	86	
Sound pressure level	Cooling Nom.	dBA	60.2	63.9	65.6	65.3	67.7	
Refrigerant	Type/GWP				R-32/675			
	Charge	kg	8.4	9.1	10.3	12	11.8	
	Circuits Quantity			1		2	1	
Piping connections		Evaporator water inlet/outlet (OD)		76.1		88.9	76.1	
Unit	Starting current	Max	A	215	315	328	290	464
	Running current	Cooling Nom.	A	59	71	83	113	118
	Max	A	75	87	100	149	134	
Power supply	Phase/Frequency	Hz			3~/50			

Air cooled scroll compressor chiller Gold efficiency Standard sound

- › R32 refrigerant;
- › Nominal capacity up to 1,000 kW;
- › Scroll compressors;
- › Top class efficiency both at full and part load conditions;
- › Best capacity with smallest footprint;
- › Microchannel coils;
- › Performance monitoring;
- › New Daikin MicroTech 4 controller.

More details and final information can be found by scanning or clicking the QR codes.



EWAT-B-SSC



MicroTech 4

		EWAT	310B-SSC1	320B-SSC1	350B-SSC1	380B-SSC2	430B-SSC2	480B-SSC2	570B-SSC2	620B-SSC2	670B-SSC2	730B-SSC2	
Space cooling		A Condition 35°C Pdc	kW	305.92	317.98	345.59	381.40	426.61	477.56	567.34	622.34	668.92	734.97
$\eta_{S,C}$		%		184.6	177.7	181.2	183.0	184.9	183.0	190.4	188.9	188.1	190.4
SEER				4.689	4.517	4.604	4.649	4.698	4.649	4.834	4.797	4.778	4.834
Cooling capacity		Nom.	kW	305.92	317.98	345.59	381.40	426.61	477.56	567.34	622.34	668.92	734.97
Power input		Cooling Nom.	kW	106.6	115.0	130.0	125.2	148.6	176.0	185.5	213.1	237.0	248.6
Capacity control		Method											Step
Minimum capacity		%		22	21	19	18	16	14	22	20	18	17
EER				2.869	2.764	2.658	3.046	2.871	2.714	3.058	2.921	2.823	2.957
IPLV				4.948	4.794	4.948	4.849	4.907	4.940	5.062	5.073	5.088	5.120
Dimensions		Unit	Height	mm					2,535				
			Width	mm					2,238				
			Depth	mm									
Weight		Unit	kg	2,080	2,120	2,200	2,620	2,800	2,920	3,500	3,670	3,780	4,310
		Operation weight	kg	2,099	2,146	2,228	2,646	2,837	2,960	3,555	3,747	3,856	4,385
Air heat exchanger		Type											Microchannel
Compressor		Type											Scroll compressor
Fan		Quantity		3	4	3	4	5					6
		Type											Direct propeller
		Quantity											10
		Air flow rate Cooling Nom.	l/s	25,490	25,500	25,490	38,240			50,980			63,730
Sound power level		Cooling Nom.	dBA	94.0	93.8	94.5	95.1	95.6	95.9	96.7	97.0	97.3	97.9
Sound pressure level		Cooling Nom.	dBA	74.9	74.7	75.5	75.4	75.9	76.2	76.5	76.7	77.0	77.2
Operation range		Air side Cooling Min.~Max.	°CDB				-20~52						
Refrigerant		Type/GWP					R-32/675						
		Charge	kg	22.0	25.0	30.0	31.0	35.0	39.0	45.0	50.0	53.0	59.0
		Circuits Quantity		1	2	1				2			
Piping connections		Evaporator water inlet/outlet (OD)					88.9mm						139.7mm
Unit		Starting current Max	A	693	697	735	750	792	838	891	936	979	1,032
		Running current Cooling Nom.	A	186	200	224	222	260	304	329	374	413	438
		Max	A	245	249	287	302	344	390	443	488	531	584
Power supply		Phase/Frequency/Voltage	Hz/V				3~/50 /400						
		EWAT		790B-SSC2		860B-SSC2		960B-SSC2					
Space cooling		A Condition 35°C Pdc	kW		791.18			857.22					961.63
$\eta_{S,C}$		%			190.8			192.6					189.0
SEER					4.844			4.889					4.801
Cooling capacity		Nom.	kW		791.18			857.22					961.63
Power input		Cooling Nom.	kW		273.9			285.5					335.1
Capacity control		Method											Step
Minimum capacity		%			15			14					25
EER					2,889			3,002					2,870
IPLV					5.092			5.122					5.079
Dimensions		Unit	Height	mm				2,535					
			Width	mm				2,238					
			Depth	mm									
Weight		Unit	kg	4,670				5,120					5,310
		Operation weight	kg	4,743				5,196					5,412
Air heat exchanger		Type											Microchannel
Compressor		Type											Scroll compressor
Fan		Quantity					7						8
		Type											Direct propeller
		Quantity					10						12
		Air flow rate Cooling Nom.	l/s	63,730					76,480				
Sound power level		Cooling Nom.	dBA	98.1				98.6					99.0
Sound pressure level		Cooling Nom.	dBA	77.4				77.5					77.8
Operation range		Air side Cooling Min.~Max.	°CDB				-20~52						
Refrigerant		Type/GWP					R-32/675						
		Charge	kg	63.0			68.0						77.0
		Circuits Quantity					2						
Piping connections		Evaporator water inlet/outlet (OD)					139.7mm						
Unit		Starting current Max	A		1,079			1,132					1,220
		Running current Cooling Nom.	A		479			505					585
		current Max	A		631			684					772
Power supply		Phase/Frequency/Voltage	Hz/V				3~/50 /400						

Air cooled scroll compressor chiller Gold efficiency Standard sound

- › R32 refrigerant;
- › Nominal capacity up to 1,000 kW;
- › Scroll compressors;
- › Top class efficiency both at full and part load conditions;
- › Best capacity with smallest footprint;
- › Microchannel coils;
- › Performance monitoring;
- › New Daikin MicroTech 4 controller.

More details and final information can be found by scanning or clicking the QR codes.



EWAT-B-SRC

Cooling Only		EWAT	310B-SRC1	320B-SRC2	350B-SRC1	380B-SRC2	430B-SRC2	480B-SRC2	570B-SRC2	620B-SRC2	670B-SRC2	730B-SRC2					
Space cooling	A Condition 35°C Pdc	kW	297.62	308.38	334.14	373.60	415.25	463.29	553.35	605.02	647.77	714.95					
	ηs,c	%	197.5	185.0	189.2	192.8	193.5	193.1	202.0	200.3	197.9	205.2					
SEER			5.013	4.700	4.806	4.895	4.913	4.902	5.124	5.083	5.022	5.206					
Cooling capacity	Nom.	kW	297.62	308.38	334.14	373.60	415.25	463.29	553.35	605.02	647.77	714.95					
Power input	Cooling Nom.	kW	108.0	117.1	133.5	124.4	149.9	179.2	186.4	216.0	242.2	251.4					
Capacity control	Method		Step														
	Minimum capacity	%	22	21	19	18	16	14	22	20	18	17					
EER			2.757	2.634	2.502	3.003	2.771	2.586	2.969	2.801	2.674	2.844					
IPLV			5.485	4.999	5.319	5.324	5.339	5.382	5.557								
Dimensions	Unit	Height	mm	2,535													
		Width	mm	2,238													
		Depth	mm	2,514		3,594		4,674		5,754							
Weight	Unit	kg	2,164	2,206	2,288	2,705	2,920	3,063	3,634	3,828	3,937	4,467					
	Operation weight	kg	2,187	2,234	2,316	2,733	2,959	3,099	3,694	3,905	4,014	4,544					
Air heat exchanger	Type		Microchannel														
Compressor	Type		Scroll compressor														
	Quantity		3		4		5		6								
Fan	Type		Direct propeller														
	Quantity		4		6		8		10								
	Air flow rate Cooling Nom.	l/s	21,470	21,460	21,470	32,200		42,940		53,670							
Sound power level	Cooling Nom.	dBA	87.9	87.8	88.1	89.5	89.6	89.7	90.8	90.9	91.0	91.9					
Sound pressure level	Cooling Nom.	dBA	68.8		69.0	69.8	69.9	70.0	70.6	70.7	70.8	71.2					
Operation range	Air side Cooling Min.~Max.	°CDB				-20 ~ 52											
Refrigerant	Type/GWP		R-32/675														
	Charge	kg	22	25	30	31	35	39	45	50	53	59					
	Circuits Quantity		1	2	1		2										
Piping connections	Evaporator water inlet/outlet (OD)		88.9mm														
Unit	Starting current Max	A	693	697	735	750	792	838	891	936	979	1,032					
	Running current Cooling Nom.	A	195	210	236	232	272	319	344	392	434	459					
	Max	A	245	249	287	302	344	390	443	488	531	584					
Power supply	Phase/Frequency/Voltage	Hz/V		3~/50 /400													
Cooling Only	EWAT	790B-SRC2		860B-SRC2		960B-SRC2											
Space cooling	A Condition 35°C Pdc	kW	768.57		835.75		933.57										
	ηs,c	%	206.3		208.4		201.8										
SEER			5.232		5.284		5.121										
Cooling capacity	Nom.	kW	768.57		835.75		933.57										
Power input	Cooling Nom.	kW	278.3		287.5		341.0										
Capacity control	Method		Step														
	Minimum capacity	%	15		14		25										
EER			2.762		2.907		2.738										
IPLV			5.484		5.630		5.550										
Dimensions	Unit	Height	mm	2,535													
		Width	mm	2,238													
		Depth	mm	5,848			6,928										
Weight	Unit	kg	4,845		5,298		5,512										
	Operation weight	kg	4,922		5,375		5,611										
Air heat exchanger	Type		Microchannel														
Compressor	Type		Scroll compressor														
	Quantity		7		8												
Fan	Type		Direct propeller														
	Quantity		10		12												
	Air flow rate Cooling Nom.	l/s	53,670		64,400												
Sound power level	Cooling Nom.	dBA	91.9		92.6		92.7										
Sound pressure level	Cooling Nom.	dBA	71.2		71.5		71.6										
Operation range	Air side Cooling Min.~Max.	°CDB			-20 ~ 52												
Refrigerant	Type/GWP		R-32/675														
	Charge	kg	63		68		77										
	Circuits Quantity			2													
Piping connections	Evaporator water inlet/outlet (OD)		139.7mm														
Unit	Starting current Max	A	1,078		1,131		1,219										
	Running current Cooling Nom.	A	503		529		615										
	current Max	A	630		683		771										
Power supply	Phase/Frequency/Voltage	Hz/V		3~/50 /400													

Air cooled scroll compressor chiller

Gold efficiency

Standard sound

- › R32 refrigerant;
- › Nominal capacity up to 1,000 kW;
- › Scroll compressors;
- › Top class efficiency both at full and part load conditions;
- › Best capacity with smallest footprint;
- › Microchannel coils;
- › Performance monitoring;
- › New Daikin MicroTech 4 controller.

More details and final information can be found by scanning or clicking the QR codes.



EWAT-B-XSC



MicroTech 4

	EWAT	10B-XSC2	250B-XSC1	320B-XSC1	370B-XSC1	390B-XSC2	450B-XSC2	510B-XSC2	540B-XSC2	590B-XSC2	630B-XSC2		
Space cooling	A Condition 35°C Pdc	kW	1,009.36	252.39	324.44	371.33	387.85	448.05	512.31	539.39	586.74	631.42	
	ηs,c	%	193.4	181.8	188.6	187.4	184.9	187.4	189.4	192.5	192.4	192.6	
SEER			4.910	4.620	4.789	4.759	4.697	4.760	4.810	4.887	4.884	4.890	
Cooling capacity	Nom.	kW	1,009.00	252.39	324.44	371.33	387.85	448.05	512.31	539.39	586.74	631.42	
Power input	Cooling Nom.	kW	315.7	79.1	100.0	118.8	125.6	140.5	158.0	160.2	178.6	197.1	
Capacity control	Method							Step					
	Minimum capacity	%	25	50	22	19	18	16	25	14	22	20	
EER			3.197	3.189	3.245	3.126	3.088	3.189	3.242	3.368	3.285	3.203	
IPLV			5.126	4.907	5.002	5.051	4.895	4.977	5.068	5.091	5.117	5.109	
Dimensions	Unit	Height	mm					2,535					
		Width	mm					2,238					
		Depth	mm	9,088	2,514		3,594		4,674		5,754		
Weight	Unit		kg	6,251	1,963	2,466	2,585	2,657	3,169	3,359	3,804	3,916	4,024
	Operation weight		kg	6,350	1,986	2,489	2,610	2,693	3,205	3,419	3,864	3,979	4,084
Air heat exchanger	Type						Microchannel						
Compressor	Type						Scroll compressor						
	Quantity			8	2	3		4			5		
Fan	Type						Direct propeller						
	Quantity			16	4	6		8			10		
	Air flow rate Cooling Nom.	l/s	101,980	25,490		38,240		50,980			63,730		
Sound power level	Cooling Nom.	dBA	99.5	93.5	94.8	95.3	95.1	96.1	96.5	96.9	97.2	97.5	
Sound pressure level	Cooling Nom.	dBA	77.6	74.4	75.1	75.6	75.4	75.9	76.3	76.2	76.5	76.8	
Operation range	Air side Cooling Min.~Max.	°CDB					-20 ~ 52						
Refrigerant	Type/GWP						R-32/675						
	Charge	kg	75.0	44.0	50.0	55.0	30.5	35.0	39.5	42.0	45.0	49.0	
	Circuits Quantity		2		1				2				
Piping connections	Evaporator water inlet/outlet (OD)		139.7mm			88.9mm				139.7mm			
Unit	Starting current Max	A	1,240	647	703	746	750	803	845	858	901	944	
	Running current Cooling Nom.	A	567	142	181	212	223	252	284	292	323	354	
	Max	A	792	199	255	298	302	355	397	410	453	496	
Power supply	Phase/Frequency/Voltage	Hz/V					3~/50 /400						
Cooling Only	EWAT	720B-XSC2	760B-XSC2	830B-XSC2	880B-XSC2								
Space cooling	A Condition 35°C Pdc	kW	716.56		762.50		834.45				880.39		
	ηs,c	%	193.9		194.2		193.8				193.5		
SEER			4.923		4.930		4.920				4.913		
Cooling capacity	Nom.	kW	716.56		762.50		834.45				880.39		
Power input	Cooling Nom.	kW	218.1		236.9		257.3				276.1		
Capacity control	Method					Step							
	Minimum capacity	%	18		17		15				14		
EER			3.285		3.219		3.243				3.189		
IPLV			5.141		5.165		5.130				5.146		
Dimensions	Unit	Height	mm			2,535							
		Width	mm			2,238							
		Depth	mm		6,834				8,008				
Weight	Unit		kg	4,565		4,673		5,442			5,551		
	Operation weight		kg	4,642		4,750		5,519			5,628		
Air heat exchanger	Type					Microchannel							
Compressor	Type					Scroll compressor							
	Quantity			6			7						
Fan	Type					Direct propeller							
	Quantity			12			14						
	Air flow rate Cooling Nom.	l/s		76,480			89,230						
Sound power level	Cooling Nom.	dBA	98.0		98.3		98.7				98.9		
Sound pressure level	Cooling Nom.	dBA	76.9		77.1		77.2				77.4		
Operation range	Air side Cooling Min.~Max.	°CDB				-20 ~ 52							
Refrigerant	Type/GWP					R-32/675							
	Charge	kg	55.0		57.5		62.5				67.0		
	Circuits Quantity		2										
Piping connections	Evaporator water inlet/outlet (OD)				139.7mm								
Unit	Starting current Max	A	999		1,042				1,142				
	Running current Cooling Nom.	A	394		425			464			495		
	current Max	A	551		594				694				
Power supply	Phase/Frequency/Voltage	Hz/V				3~/50 /400							

Air cooled scroll compressor chiller

Gold efficiency

Standard sound

- › R32 refrigerant;
- › Nominal capacity up to 1,000 kW;
- › Scroll compressors;
- › Top class efficiency both at full and part load conditions;
- › Best capacity with smallest footprint;
- › Microchannel coils;
- › Performance monitoring;
- › New Daikin MicroTech 4 controller.

More details and final information
can be found by scanning
or clicking the QR codes.



EWAT-B-XRC



MicroTech 4

	EWAT	10B-XRC2	250B-XRC1	320B-XRC1	370B-XRC1	390B-XRC2	450B-XRC2	510B-XRC2	540B-XRC2	590B-XRC2	630B-XRC2	
Space cooling	A Condition 35°C Pdc	kW	965.50	241.40	313.20	355.68	370.32	431.43	489.48	520.68	563.54	603.94
	ηs,c	%	206.2	195.6	204.4	202.6	196.2	203.3	201.3	208.2	207.8	206.5
SEER			5.229	4.965	5.186	5.140	4.979	5.158	5.108	5.279	5.270	5.237
Cooling capacity	Nom.	kW	965.50	241.40	313.20	355.68	370.32	431.43	489.48	520.68	563.54	603.94
Power input	Cooling Nom.	kW	323.5	81.1	99.9	121.4	129.1	141.4	162.1	159.6	180.7	202.0
Capacity control	Method							Step				
	Minimum capacity	%	25	50	22	19	18	16	25	14	22	20
EER			2.985	2.977	3.135	2.929	2.869	3.052	3.019	3.262	3.119	2.990
IPLV			5.576	5.340	5.525	5.487	5.317	5.446	5.528	5.630	5.620	5.601
Dimensions	Unit	Height	mm					2,535				
		Width	mm					2,238				
		Depth	mm	9,090	2,510	53,600	3,590	4,670			5,750	
Weight	Unit	kg	6,450	2,020	2,550	2,670	2,740	3,290	3,480	3,940	4,060	4,160
	Operation weight	kg	6,549	2,045	2,577	2,698	2,780	3,324	3,538	4,003	4,115	4,223
Air heat exchanger	Type							Microchannel				
Compressor	Type							Scroll compressor				
	Quantity		8	2	3	4			5			
Fan	Type							Direct propeller				
	Quantity		16	4	6	8			10			
	Air flow rate	Cooling Nom.	l/s	75,600	18,900	28,350	37,800				47,250	
Sound power level	Cooling Nom.	dBA	90.0	84.0	85.4	85.7	85.6	86.8	87.0	87.6	87.8	87.9
Sound pressure level	Cooling Nom.	dBA	68.1	64.9	65.7	66.0	65.9	66.5	66.7	66.9	67.1	67.2
Operation range	Air side Cooling Min.~Max.	°CDB				-20 ~ 52						
Refrigerant	Type/GWP					R-32/675						
	Charge	kg	75.0	44.0	50.0	55.0	30.5	39.5	42.0	45.0	49.0	
	Circuits Quantity		2	1				2				
Piping connections	Evaporator water inlet/outlet (OD)		139.7mm		88.9mm			139.7mm				
Unit	Starting current Max	A	1,240	647	703	746	750	803	845	858	901	944
	Running current Cooling Nom.	A	570	143	178	213	225	249	286	287	322	356
	Max	A	792	199	255	298	302	355	397	410	453	496
Power supply	Phase/Frequency/Voltage	Hz/V				3~/50 /400						
Cooling Only	EWAT	720B-XRC2	760B-XRC2	830B-XRC2	880B-XRC2							
Space cooling	A Condition 35°C Pdc	kW	687.57		728.98		800.94		842.34			
	ηs,c	%	208.6		207.0		210.0		208.8			
SEER			5.291		5.249		5.324		5.294			
Cooling capacity	Nom.	kW	687.57		729.00		800.94		842.34			
Power input	Cooling Nom.	kW	221.3		242.8		261.1		282.2			
Capacity control	Method					Step						
	Minimum capacity	%	18	17	15			14				
EER			3.107	3.003		3.067		2.979				
IPLV			5.649	5.605		5.613		5.605				
Dimensions	Unit	Height	mm			2,535						
		Width	mm			2,238						
		Depth	mm		6,830			8,010				
Weight	Unit	kg	4,720		4,830		5,620		5,730			
	Operation weight	kg	4,801		4,909		5,697		5,806			
Air heat exchanger	Type					Microchannel						
Compressor	Type					Scroll compressor						
	Quantity		6				7					
Fan	Type					Direct propeller						
	Quantity		12				14					
	Air flow rate	Cooling Nom.	l/s	56,700			66,150					
Sound power level	Cooling Nom.	dBA	88.6		88.7		89.3		89.4			
Sound pressure level	Cooling Nom.	dBA	67.5		67.6		67.7		67.8			
Operation range	Air side Cooling Min.~Max.	°CDB				-20 ~ 52						
Refrigerant	Type/GWP					R-32/675						
	Charge	kg	55.0		57.5		62.5		67.0			
	Circuits Quantity		2									
Piping connections	Evaporator water inlet/outlet (OD)					139.7mm						
Unit	Starting current Max	A	999		1,042			1,142				
	Running current Cooling Nom.	A	393		428		463		498			
	current Max	A	551		594			694				
Power supply	Phase/Frequency/Voltage	Hz/V				3~/50 /400						

Air cooled scroll compressor chiller with integrated free cooling Gold efficiency Standard sound

- › R32 refrigerant;
- › Nominal capacity up to 1,000 kW;
- › Scroll compressors;
- › Top class efficiency both at full and part load conditions;
- › Best capacity with smallest footprint;
- › Microchannel coils;
- › Glycol free option;
- › New Daikin MicroTech 4 controller.

More details and final information can be found by scanning or clicking the QR codes.



EWFT-B-SSC



MicroTech 4

Cooling Only			EWFT	310B-SSC1	320B-SSC2	350B-SSC1	380B-SSC2	430B-SSC2	480B-SSC2	570B-SSC2	620B-SSC2	670B-SSC2	730B-SSC2						
SEER				4.833	4.546	4.641	4.688	4.73	4.742	4.921	4.879	4.815	5.014						
Cooling capacity Nom.			kW	395.2	351.7	439.1	499.3	493.6	553.8	738.6	803.5	749.6	843.7						
Power input Cooling Nom.			kW	121.6	95.91	151.7	138.4	131.3	164.2	211	245.1	211.9	220.9						
Capacity control Method				Step															
EER			%	39	21	33	18	16	14	22	20	18	17						
IPLV				3.25	3.667	2.894	3.608	3.76	3.373	3.501	3.278	3.538	3.819						
Dimensions Unit			Height mm	2,535															
Width mm				2,238															
Depth mm				2,514															
Weight Unit			kg	2,245	2,288	2,373	2,852	3,012	3,155	3,774	3,953	4,056	4,667						
Operation weight kg				2,388	2,436	2,521	3,023	3,198	3,341	4,044	4,223	4,343	5,054						
Air heat exchanger Type				Microchannel															
Compressor Type				Scroll compressor															
Quantity				3	4	3	4	5	6										
Fan Type				Direct propeller															
Quantity				4															
Air flow rate Cooling Nom. l/s				22,510															
Sound power level Cooling Nom. dBA				94	93.8	94.5	95.1	95.6	95.9	96.7	97	97.3	97.9						
Sound pressure level Cooling Nom. dBA				74.9	74.7	75.5	75.4	75.9	76.2	76.5	76.7	77.0	77.2						
Operation range Air side Cooling Min.~Max. °CDB				-20 ~46															
Refrigerant Type/GWP				R-32/675.0															
Charge kg				22.0	25.0	30.0	31.0	35.0	39.0	45.0	50.0	53	59.0						
Circuits Quantity				1	2	1				2									
Piping connections Evaporator water inlet/outlet (OD)				88.9															
Unit Starting current Max A				693	697	735	750	792	838	891	936	979	1,032						
Unit Running Cooling Nom. A				216.2	174.1	264.3	252.3	240.2	294.4	378.9	435	380.3	403.2						
Unit current Max A				245	249	287	302	344	390	443	488	531	584						
Power supply Phase/Frequency/Voltage Hz/V				3~/50/400															
Cooling Only			EWFT	790B-SSC2			860B-SSC2			960B-SSC2									
SEER				5.049			5.076			4.93									
Cooling capacity Nom.			kW	1,018			1,112			1,235									
Power input Cooling Nom.			kW	316.1			325.1			387.5									
Capacity control Method				Step			14			25									
EER				3.222			3.422			3.188									
IPLV				5.307			5.381			5.312									
Dimensions Unit			Height mm	2,535			2,238												
Width mm				5,848			6,928												
Depth mm				5,035			5,546			5,860									
Weight Unit			kg	5,422			5,975			6,311									
Air heat exchanger Type				Microchannel															
Compressor Type				Scroll compressor															
Quantity				7															
Fan Type				Direct propeller															
Quantity				10															
Air flow rate Cooling Nom. l/s				56,275															
Sound power level Cooling Nom. dBA				98.1			98.6			99									
Sound pressure level Cooling Nom. dBA				77.4			77.5			77.8									
Operation range Air side Cooling Min.~Max. °CDB				-20 ~46															
Refrigerant Type/GWP				R-32/675.0															
Charge kg				63.0			68.0			77.0									
Circuits Quantity				2															
Piping connections Evaporator water inlet/outlet (OD)				139.7															
Unit Starting current Max A				1,079			1,132			1,220									
Unit Running Cooling Nom. A				559			581.8			683.6									
Unit current Max A				631			684			772									
Power supply Phase/Frequency/Voltage Hz/V				3~/50/400															

Performances according to Chiller Configurator 1.4 software | Cooling: entering evaporator water temp. 26°C; leaving evaporator water temp. 18°C; ambient air temp. 35°C; ethylene glycol fluid 25%; full load operation.

Air cooled scroll compressor chiller with integrated free cooling Gold efficiency Standard sound

- › R32 refrigerant;
- › Nominal capacity up to 1,000 kW;
- › Scroll compressors;
- › Top class efficiency both at full and part load conditions;
- › Best capacity with smallest footprint;
- › Microchannel coils;
- › Glycol free option;
- › New Daikin MicroTech 4 controller.

More details and final information can be found by scanning or clicking the QR codes.



EWFT-B-SRC



MicroTech 4

Cooling Only			EWFT	310B-SRC1	320B-SRC2	350B-SRC1	380B-SRC2	430B-SRC2	480B-SRC2	570B-SRC2	620B-SRC2	670B-SRC2	730B-SRC2
SEER				4.778	4.329	4.602	4.713	4.715	4.662	4.899	4.823	4.782	4.972
Cooling capacity	Nom.	kW	395.2	408.4	439.1	480.6	544.2	598.2	725	762.6	851.4	947.6	
Power input	Cooling	Nom.	121.6	131.1	151.7	143.7	167.5	204.3	214.2	259.3	277.4	283.4	
Capacity control	Method												Step
	Minimum capacity	%	39	21	33	18	16	14	22	20	18	17	
EER				3.25	3.115	2.894	3.344	3.249	2.928	3.385	2.941	3.069	3.344
IPLV				5.281	4.858	5.084	5.074	5.096	5.148	5.329	5.347	5.309	5.414
Dimensions	Unit	Height	mm										2,535
		Width	mm										2,238
		Depth	mm										
Weight	Unit	kg	2,336	2,379	2,464	2,942	3,134	3,298	3,917	4,116	4,219	4,830	
	Operation weight	kg	2,479	2,527	2,612	3,113	3,320	3,484	4,187	4,386	4,506	5,217	
Air heat exchanger	Type												Microchannel
Compressor	Type												Scroll compressor
	Quantity			3	4	3	4	5					6
Fan	Type												Direct propeller
	Quantity				4		6						8
	Air flow rate	Cooling	Nom.	l/s	22,510		33,765						10
Sound power level	Cooling	Nom.	dBA	87.9	87.8	88.1	89.5	89.6	89.7	90.8	90.9	91	91.9
Sound pressure level	Cooling	Nom.	dBA	68.8	69.0	69.8	69.9	70.0	70.6	70.7	70.8	71.0	71.2
Operation range	Air side	Cooling	Min.~Max.	°CDB			-20 ~ 46						
Refrigerant	Type/GWP						R-32/675						
	Charge	kg	22.0	25.0	30.0	31.0	35.0	39.0	45.0	50.0	53.0	59.0	
	Circuits	Quantity		1	2	1			2				
Piping connections	Evaporator water inlet/outlet (OD)						88.9						139.7
Unit	Starting current	Max	A	693	697	735	750	792	838	891	936	979	1,032
	Running current	Max	A	229.6	243.8	277.7	266.8	312.2	372.3	401.2	464.7	509.7	529.5
	Power supply	Phase/Frequency/Voltage	Hz/V	245	249	287	302	344	390	443	488	531	584
							3~/50 /400						
Cooling Only	EWFT												960B-SRC2
SEER					4.984								4.883
Cooling capacity	Nom.	kW			970.4								1,170
Power input	Cooling	Nom.	kW		335.4								409.7
Capacity control	Method												Step
	Minimum capacity	%			15		14						25
EER					2.893		3.312						2.856
IPLV					5.271		5.399						5.300
Dimensions	Unit	Height	mm										2,535
		Width	mm										2,238
		Depth	mm		5,848								6,928
Weight	Unit	kg			5,220		5,730						6,065
	Operation weight	kg			5,607		6,159						6,516
Air heat exchanger	Type												Microchannel
Compressor	Type												Scroll compressor
	Quantity						7						8
Fan	Type												Direct propeller
	Quantity						10						12
	Air flow rate	Cooling	Nom.	l/s	56,275								67,530
Sound power level	Cooling	Nom.	dBA	91.9		92.6							92.7
Sound pressure level	Cooling	Nom.	dBA	71.2		71.5							71.6
Operation range	Air side	Cooling	Min.~Max.	°CDB			-20 ~ 46						
Refrigerant	Type/GWP						R-32/675						
	Charge	kg		63.0		68.0							77.0
	Circuits	Quantity					2						
Piping connections	Evaporator water inlet/outlet (OD)							139.7					
Unit	Starting current	Max	A	1,078				1,131					1,219
	Running current	Max	A	597.9		615.2							727.8
	Power supply	Phase/Frequency/Voltage	Hz/V	630		683							771
							3~/50 /400						

Performances according to Chiller Configurator 1.4 software | Cooling: entering evaporator water temp. 26°C; leaving evaporator water temp. 18°C; ambient air temp. 35°C; ethylene glycol fluid 25%; full load operation.

Air cooled scroll compressor chiller with integrated free cooling Gold efficiency Standard sound

- › R32 refrigerant;
- › Nominal capacity up to 1,000 kW;
- › Scroll compressors;
- › Top class efficiency both at full and part load conditions;
- › Best capacity with smallest footprint;
- › Microchannel coils;
- › Glycol free option;
- › New Daikin MicroTech 4 controller.

More details and final information can be found by scanning or clicking the QR codes.



EWFT-B-XSC



MicroTech 4

Cooling Only			EWFT	10B-XSC2	250B-XSC1	320B-XSC1	370B-XSC1	390B-XSC2	450B-XSC2	510B-XSC2	540B-XSC2	590B-XSC2	630B-XSC2		
SEER				5.189	4.723	5.186	5.011	4.74	4.957	4.911	5.213	5.141	5.131		
Cooling capacity	Nom.	kW	1,326	331.9	429.6	487.6	508.5	591.6	673.7	716.2	774.8	829.5			
Power input	Cooling	Nom.	kW	351.7	87.99	108.4	131	139.3	152.6	176.8	175.2	197.5	219.9		
Capacity control	Method			Step											
	Minimum capacity	%		25	50	39	33	18	16	25	14	22	20		
EER				3.77	3.772	3.963	3.722	3.65	3.877	3.81	4.088	3.923	3.772		
IPLV				5.514	5.185	5.518	5.366	5.122	5.326	5.322	5.623	5.546	5.509		
Dimensions	Unit	Height	mm	2,535											
		Width	mm	2,238											
		Depth	mm	9,088	2,514		3,594			4,674		5,754			
Weight	Unit	kg	6,792	2,129	2,678	2,800	2,885	3,420	3,634	4,150	4,266	4,377			
	Operation weight	kg	7,331	2,272	2,851	2,975	3,064	3,658	3,904	4,520	4,636	4,747			
Air heat exchanger	Type			Microchannel											
Compressor	Type			Scroll compressor											
	Quantity			8	2	3		4			5				
Fan	Type			Direct propeller											
	Quantity			16	4		6		8		10				
	Air flow rate	Cooling	Nom.	l/s	90,040	22,510		33,765		45,020		56,275			
Sound power level	Cooling	Nom.	dBA	99.5	93.5	94.8	95.3	95.1	96.1	96.5	96.9	97.2	97.5		
Sound pressure level	Cooling	Nom.	dBA	77.6	74.4	75.1	75.6	75.4	75.9	76.3	76.2	76.5	76.8		
Operation range	Air side	Cooling	Min.~Max.	°CDB	-20 ~ 46										
Refrigerant	Type/GWP				R-32/675										
	Charge	kg	90.0	26.0	30.0	33.0	37.0	42.0	47.0	50.0	54.0	58.0			
	Circuits	Quantity		2		1				2					
Piping connections	Evaporator water inlet/outlet (OD)			139.7			88.9				139.7				
Unit	Starting current	Max	A	1,240	647	703	746	750	803	845	858	901	944		
	Running current	Cooling	Nom.	A	642.5	160.7	202.1	239.6	253.6	282.7	322.7	327.1	364.3	401.6	
	current	Max	A	792	199	255	298	302	355	397	410	453	496		
Power supply	Phase/Frequency/Voltage	Hz/V		3~/50 /400											
Cooling Only	EWFT	720B-XSC2		760B-XSC2		830B-XSC2		880B-XSC2							
SEER				5.219		5.193		5.251			5.243				
Cooling capacity	Nom.	kW	945.8		1,002		1,100			1,156					
Power input	Cooling	Nom.	kW	241.8		264.5		284.6			307.3				
Capacity control	Method			Step											
	Minimum capacity	%		18		17		15		14					
EER				3.912		3.789		3.865			3.763				
IPLV				5.570		5.518		5.553			5.519				
Dimensions	Unit	Height	mm	2,535											
		Width	mm	2,238											
		Depth	mm	6,834						8,008					
Weight	Unit	kg	4,975		5,086		5,879			5,991					
	Operation weight	kg	5,404		5,515		6,352			6,464					
Air heat exchanger	Type			Microchannel											
Compressor	Type			Scroll compressor											
	Quantity			6			7								
Fan	Type			Direct propeller											
	Quantity			12			14			78,785					
	Air flow rate	Cooling	Nom.	l/s	67,530										
Sound power level	Cooling	Nom.	dBA	98		98.3		98.7			98.9				
Sound pressure level	Cooling	Nom.	dBA	76.9		77.1		77.2			77.4				
Operation range	Air side	Cooling	Min.~Max.	°CDB	-20 ~ 46										
Refrigerant	Type/GWP				R-32/675										
	Charge	kg	66.0		69.0		75.0			80.0					
	Circuits	Quantity				2									
Piping connections	Evaporator water inlet/outlet (OD)				139.7										
Unit	Starting current	Max	A	999		1,042			1,142			561.6			
	Running current	Cooling	Nom.	A	445.1		482.9		523.9				694		
	current	Max	A	551		594									
Power supply	Phase/Frequency/Voltage	Hz/V		3~/50 /400											

Performances according to Chiller Configurator 1.4 software | Cooling: entering evaporator water temp. 26°C; leaving evaporator water temp. 18°C; ambient air temp. 35°C; ethylene glycol fluid 25%; full load operation.

Air cooled scroll compressor chiller with integrated free cooling Gold efficiency Standard sound

- › R32 refrigerant;
- › Nominal capacity up to 1,000 kW;
- › Scroll compressors;
- › Top class efficiency both at full and part load conditions;
- › Best capacity with smallest footprint;
- › Microchannel coils;
- › Glycol free option;
- › New Daikin MicroTech 4 controller.

More details and final information can be found by scanning or clicking the QR codes.



EWFT-B-XRC



MicroTech 4

Cooling Only			EWFT	10B-XRC2	250B-XRC1	320B-XRC1	370B-XRC1	390B-XRC2	450B-XRC2	510B-XRC2	540B-XRC2	590B-XRC2	630B-XRC2	
SEER				5.14	4.7	5.144	5.025	4.70	5.002	4.833	5.214	5.167	5.064	
Cooling capacity	Nom.	kW	1,224	306.4	403.9	451.4	484.7	553.5	620.5	673.3	721.2	765.7		
Power input	Cooling	Nom.	383.2	95.79	114.4	142.5	146.9	162.7	192.9	184.1	211.7	239.6		
Capacity control	Method			Step										
	Minimum capacity	%		25	50	39	33	18	16	25	14	22	20	
EER				3.195	3.198	3.531	3.168	3.3	3.402	3.217	3.657	3.407	3.196	
IPLV				5.568	5.118	5.587	5.431	5.094	5.373	5.305	5.650	5.567	5.515	
Dimensions	Unit	Height	mm	2,535										
		Width	mm	2,238										
		Depth	mm	9,088	2,514		3,594			4,674			5,754	
Weight	Unit	kg	6,997	2,189	2,768	2,891	2,975	3,543	3,757	4,293	4,409	4,520		
	Operation weight	kg	7,536	2,332	2,941	3,066	3,154	3,781	4,027	4,663	4,779	4,890		
Air heat exchanger	Type			Microchannel										
Compressor	Type			Scroll compressor										
	Quantity			8	2	3		4					5	
Fan	Type			Direct propeller										
	Quantity			16	4		6		8				10	
	Air flow rate	Cooling	Nom.	l/s	90,040	22,510		33,765		45,020			56,275	
Sound power level	Cooling	Nom.	dBA	90	84	85.4	85.7	85.6	86.8	87	87.6	87.8	87.9	
Sound pressure level	Cooling	Nom.	dBA	68.1	64.9	65.7	66.0	65.9	66.5	66.7	66.9	67.1	67.2	
Operation range	Air side	Cooling	Min.~Max.	°CDB	-20 ~ 46									
Refrigerant	Type				R-32									
	Charge		kg	90.0	26.0	30.0	33.0	37.0	42.0	47.0	50.0	54.0	58.0	
	Circuits	Quantity		2		1					2			
Piping connections	Evaporator water inlet/outlet (OD)			139.7	88.9									
Unit	Starting current	Max	A	1,240	647	703	746	750	803	845	858	901	944	
	Running current	Cooling	Nom.	A	712.9	178.3	220.3	265.6	285.1	309.9	358.4	356	400.7	445.7
	current	Max	A	792	199	255	298	302	355	397	410	453	496	
Power supply	Phase/Frequency/Voltage	Hz/V			3~/50 /400									
Cooling Only			EWFT	720B-XRC2	760B-XRC2	830B-XRC2	880B-XRC2							
SEER				5.159		5.121		5.293					5.181	
Cooling capacity	Nom.	kW	878.7		924.2			1,023					1,068	
Power input	Cooling	Nom.	260.1		288.3			306.6					334.8	
Capacity control	Method			Step										
	Minimum capacity	%		18		17		15					14	
EER				3.378		3.206			3.335				3.19	
IPLV				5.620		5.549			5.598				5.563	
Dimensions	Unit	Height	mm	2,535										
		Width	mm	2,238										
		Depth	mm	6,834									8,008	
Weight	Unit	kg	5,139		5,250			6,062					6,174	
	Operation weight	kg	5,568		5,679			6,535					6,647	
Air heat exchanger	Type			Microchannel										
Compressor	Type			Scroll compressor										
	Quantity			6									7	
Fan	Type			Direct propeller										
	Quantity			12									14	
	Air flow rate	Cooling	Nom.	l/s	67,530								78,785	
Sound power level	Cooling	Nom.	dBA	88.6		88.7			89.3				89.4	
Sound pressure level	Cooling	Nom.	dBA	67.5		67.6			67.7				67.8	
Operation range	Air side	Cooling	Min.~Max.	°CDB	-20 ~ 46									
Refrigerant	Type			R-32										
	Charge		kg	66.0		69.0			75.0				80.0	
	Circuits	Quantity						2						
Piping connections	Evaporator water inlet/outlet (OD)				139.7									
Unit	Starting current	Max	A	999		1,042			1,142					
	Running current	Cooling	Nom.	A	490.5		536.1		577.5				623.1	
	current	Max	A	551		594			694					
Power supply	Phase/Frequency/Voltage	Hz/V			3~/50 /400									

Performances according to Chiller Configurator 1.4 software | Cooling: entering evaporator water temp. 26°C; leaving evaporator water temp. 18°C; ambient air temp. 35°C; ethylene glycol fluid 25%; full load operation.

Air cooled mini inverter heat pump

- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- › Inverter chiller
- › Hermetically sealed swing inverter compressor
- › New casing for the outdoor units
- › Separate MMI-2 controller for indoor installation



More details and final information can be found by scanning or clicking the QR codes.

EWYA-DV3P

			EWYA-D	004DV3P	006DV3P	008DV3P
Space cooling	A Condition Pdc 35°C	kW			-	
	ηs,c	%			-	
SEER					-	
Space heating	Average climate water outlet 35°C	General SCOP		4.54	4.52	4.61
		Seasonal space heating eff. class			A+++	
Cooling capacity	Nom.	kW	4.86(1)/4.52(2)	5.83(1)/5.09(2)	6.18(1)/5.44(2)	
Heating capacity	Nom.	kW	4.30(1)/4.60(2)	6.00(1)/5.90(2)	7.50(1)/7.80(2)	
Power input	Cooling Nom.	kW	0.820(1)/1.36(2)	1.08(1)/1.55(2)	1.19(1)/1.73(2)	
	Heating Nom.	kW	0.840(1)/1.26(2)	1.24(1)/1.69(2)	1.63(1)/2.23(2)	
Capacity control	Method			Variable (inverter)		
EER			5.91(1)/3.32(2)	5.40(1)/3.28(2)	5.19(1)/3.14(2)	
COP			5.10(1)/3.65(2)	4.85(1)/3.50(2)	4.60(1)/3.50(2)	
Dimensions	Unit	Height	mm	770		
		Width	mm	1,250		
		Depth	mm	362		
Weight	Unit	kg		88.0		
Water heat exchanger	Type			Plate heat exchanger		
	Water volume	l		1		
Air heat exchanger	Type			-		
Compressor	Type			Hermetically sealed swing compressor		
	Quantity			1		
Fan	Type			Propeller fan		
	Quantity			1		
	Air flow rate	Cooling Nom.	m³/min	-		
		Heating Nom.	m³/min	-		
Sound power level	Cooling	Nom.	dBA	61.0(1)	62.0(1)	
	Heating	Nom.	dBA	58.0(1)	60.0(1)	62.0(1)
Sound pressure level	Cooling	Nom.	dBA	48.0(1)	49.0(1)	50.0(1)
	Heating	Nom.	dBA	44.0(1)	47.0(1)	49.0(1)
Operation range	Air side	Cooling Min.~Max.	°CDB		10(3)~43	
		Heating Min.~Max.	°CDB		-25~25	
Refrigerant	Type/GWP			R-32/675.0		
	Charge	kg		1.35		
	Control			-		
	Circuits	Quantity		-		
Refrigerant charge	Per circuit	kg		-		
Unit	Running Max current	A		-		
Power supply	Phase/Frequency/Voltage	Hz/V		1~/50 /230 +/-10%		

(1)Condition 1: cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) | (2)Condition 2: cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C) | (3)For more details, see operation range drawing | (4)Cooling: EW 12°C; LW 7°C; ambient conditions: 35°CDB | (5)Cooling: EW 23°C; LW 18°C; ambient conditions: 35°CDB | (6)Condition: Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) | (7)Condition: Ta DB/WB 7°C/6°C - LWC 45°C (DT=5°C) | (8)According to EN14825 | Depends on operation mode, refer to installation manual.

Air cooled mini inverter heat pump

- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- › Inverter chiller
- › Hermetically sealed swing inverter compressor
- › New casing for the outdoor units
- › Separate MMI-2 controller for indoor installation



More details and final information can be found by scanning or clicking the QR codes.

EWYA-DV3P

			EWYA-D	009DV3P	011DV3P	014DV3P	016DV3P
Space cooling	A Condition Pdc 35°C	kW	9.35	11.6	12.8	14.0	
	ηs,c	%	222	229	226	221	
SEER			5.62(8)	5.79(8)	5.71(8)	5.59(8)	
Space heating	Average climate water outlet 35°C	General SCOP	4.82	4.73	4.70	4.69	
		Seasonal space heating eff. class			A+++		
Cooling capacity	Nom.	kW	9.35(4)/9.10(5)	11.6(4)/11.5(5)	12.8(4)/12.7(5)	14.0(4)/15.3(5)	
Heating capacity	Nom.	kW	9.37(6)/9.00(7)	10.6(6)/9.82(7)	12.0(6)/12.5(7)	16.0(6)/16.0(7)	
Power input	Cooling Nom.	kW	2.79(4)/1.71(5)	3.56(4)/2.17(5)	4.06(4)/2.51(5)	4.58(4)/3.24(5)	
	Heating Nom.	kW	1.91(6)/2.43(7)	2.18(6)/2.68(7)	2.46(6)/3.42(7)	3.53(6)/4.56(7)	
Capacity control	Method			Variable (inverter)			
EER			3.35(4)/5.34(5)	3.26(4)/5.31(5)	3.16(4)/5.04(5)	3.06(4)/4.74(5)	
COP			4.91(6)/3.71(7)	4.83(6)/3.66(7)	4.87(6)/3.64(7)	4.53(6)/3.51(7)	
Dimensions	Unit	Height	mm	870			
		Width	mm	1,380			
		Depth	mm	460			
Weight	Unit	kg		147			
Water heat exchanger	Type			Plate heat exchanger			
	Water volume	l		2			
Air heat exchanger	Type			High efficiency fin and tube type with integral subcooler			
Compressor	Type			Hermetically sealed swing inverter compressor			
	Quantity			1			
Fan	Type			Propeller fan			
	Quantity			1			
	Air flow rate	Cooling Nom.	m³/min	63	70	85	
		Heating Nom.	m³/min	48.0	55.8	70.4	85.0
Sound power level	Cooling	Nom.	dBA	65.5	67.0	69.0	
	Heating	Nom.	dBA		-		
Sound pressure level	Cooling	Nom.	dBA	44.0	47.7	50.8	51.0
	Heating	Nom.	dBA		-		
Operation range	Air side	Cooling Min.~Max.	°CDB		10~43		
		Heating Min.~Max.	°CDB		-25~25		
Refrigerant	Type/GWP			R-32/675.0			
	Charge	kg		-			
	Control			Electronic expansion valve			
	Circuits	Quantity		1			
Refrigerant charge	Per circuit	kg		3.80			
Unit	Running Max current	A		30.8			
Power supply	Phase/Frequency/Voltage	Hz/V		1~/50 /230			

(1)Condition 1: cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) | (2)Condition 2: cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C) | (3)For more details, see operation range drawing | (4)Cooling: EW 12°C; LW 7°C; ambient conditions: 35°CDB | (5)Cooling: EW 23°C; LW 18°C; ambient conditions: 35°CDB | (6)Condition: Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) | (7)Condition: Ta DB/WB 7°C/6°C - LWC 45°C (DT=5°C) | (8)According to EN14825 | Depends on operation mode, refer to installation manual.

Air cooled mini inverter heat pump

- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- › Inverter chiller
- › Hermetically sealed swing inverter compressor
- › New casing for the outdoor units
- › Separate MMI-2 controller for indoor installation



More details and final information can be found by scanning or clicking the QR codes.



EWYA-DW1P

Heating & Cooling			EWYA-D	009DW1P	011DW1P	014DW1P	016DW1P
Space cooling	A Condition Pdc 35°C	kW	9.35	11.6	12.8	14.0	
	ηs,c	%	222	229	226	221	
SEER			5.62(5)	5.79(5)	5.71(5)	5.59(5)	
Space heating	Average climate water outlet 35°C	General SCOP	4.82	4.73	4.70	4.69	
		Seasonal space heating eff. class			A+++		
Cooling capacity	Nom.	kW	9.35(1)/9.10(2)	11.6(1)/11.5(2)	12.8(1)/12.7(2)	14.0(1)/15.3(2)	
Heating capacity	Nom.	kW	9.37(3)/9.00(4)	10.6(3)/9.82(4)	12.0(3)/12.5(4)	16.0(3)/16.0(4)	
Power input	Cooling Nom.	kW	2.79(1)/1.71(2)	3.56(1)/2.17(2)	4.06(1)/2.51(2)	4.58(1)/3.24(2)	
	Heating Nom.	kW	1.91(3)/2.43(4)	2.18(3)/2.68(4)	2.46(3)/3.42(4)	3.53(3)/4.56(4)	
Capacity control	Method			Variable (inverter)			
EER			3.35(1)/5.34(2)	3.26(1)/5.31(2)	3.16(1)/5.04(2)	3.06(1)/4.74(2)	
COP			4.91(3)/3.71(4)	4.83(3)/3.66(4)	4.87(3)/3.64(4)	4.53(3)/3.51(4)	
Dimensions	Unit	Height	mm	870			
		Width	mm	1,380			
		Depth	mm	460			
Weight	Unit	kg		147			
Water heat exchanger	Type			Plate heat exchanger			
	Water volume	l		2			
Air heat exchanger	Type			High efficiency fin and tube type with integral subcooler			
Compressor	Type			Hermetically sealed swing inverter compressor			
	Quantity			1			
Fan	Type			Propeller fan			
	Quantity			1			
	Air flow rate	Cooling Heating	Nom. Nom.	m³/min m³/min	63 48.0	70 55.8	85 70.4
Sound power level	Cooling	Nom.		dBA	65.5	67.0	69.0
Sound pressure level	Cooling	Nom.		dBA	44.0	47.7	50.8
Operation range	Air side	Cooling Heating	Min.~Max. Min.~Max.	°CDB °CDB		10 ~43	
	Water side	Cooling Heating	Min.~Max. Min.~Max.	°CDB °CDB		-25 ~25	
						5 ~22	
						9 (6) ~60 (6)	
Refrigerant	Type/GWP				R-32/675.0		
	Control				Electronic expansion valve		
	Circuits	Quantity			1		
Refrigerant charge	Per circuit	kg			3.80		
		TCO2eq			2.6		
Unit	Running current	A			14.0		
Power supply	Phase/Frequency/Voltage	Hz/V			3~/50 /400		

(1)Cooling: EW 12°C; LW 7°C; ambient conditions: 35°CDB | (2)Cooling: EW 23°C; LW 18°C; ambient conditions: 35°CDB | (3)Condition: Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) | (4)Condition: Ta DB/WB 7°C/6°C - LWC 45°C (DT=5°C) | (5)According to EN14825 | (6)For more details, see operation range drawing | Depends on operation mode, refer to installation manual.

Air cooled mini inverter heat pump

- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- › Inverter chiller
- › Hermetically sealed swing inverter compressor
- › New casing for the outdoor units
- › Separate MMI-2 controller for indoor installation



More details and final information can be found by scanning or clicking the QR codes.



EWYA-DW1P-H

Heating & Cooling			EWYA-D	009DW1P-H-	011DW1P-H-	014DW1P-H-	016DW1P-H-
Space cooling	A Condition Pdc 35°C	kW	9.35	11.6	12.8	14.0	
	ηs,c	%	222	229	226	221	
SEER			5.62(5)	5.79(5)	5.71(5)	5.59(5)	
Space heating	Average climate water outlet 35°C	General	SCOP	4.82	4.73	4.70	4.69
			Seasonal space heating eff. class				A+++
Cooling capacity	Nom.	kW	9.35(1)/9.10(2)	11.6(1)/11.5(2)	12.8(1)/12.7(2)	14.0(1)/15.3(2)	
Heating capacity	Nom.	kW	9.37(3)/9.00(4)	10.6(3)/9.82(4)	12.0(3)/12.5(4)	16.0(3)/16.0(4)	
Power input	Cooling Nom.	kW	2.79(1)/1.71(2)	3.56(1)/2.17(2)	4.06(1)/2.51(2)	4.58(1)/3.24(2)	
	Heating Nom.	kW	1.91(3)/2.43(4)	2.18(3)/2.68(4)	2.46(3)/3.42(4)	3.53(3)/4.56(4)	
Capacity control	Method			Variable (inverter)			
EER			3.35(1)/5.34(2)	3.26(1)/5.31(2)	3.16(1)/5.04(2)	3.06(1)/4.74(2)	
COP			4.91(3)/3.71(4)	4.83(3)/3.66(4)	4.87(3)/3.64(4)	4.53(3)/3.51(4)	
Dimensions	Unit	Height	mm	870			
		Width	mm	1,380			
		Depth	mm	460			
Weight	Unit		kg	147			
Water heat exchanger	Type			Plate heat exchanger			
	Water volume	l		2			
Air heat exchanger	Type			High efficiency fin and tube type with integral subcooler			
Compressor	Type			Hermetically sealed swing inverter compressor			
	Quantity			1			
Fan	Type			Propeller fan			
	Quantity			1			
	Air flow rate	Cooling Heating	Nom. Nom.	m³/min	63	70	85
					48.0	55.8	70.4
Sound power level	Cooling	Nom.		dBA	65.5	67.0	69.0
Sound pressure level	Cooling	Nom.		dBA	44.0	47.7	50.8
Operation range	Air side	Cooling Heating	Min.~Max. Min.~Max.	°CDB °CDB	10 ~43		
					-25 ~25		
	Water side	Cooling Heating	Min.~Max. Min.~Max.	°CDB °CDB	5 ~22		
					9 (6)~60 (6)		
Refrigerant	Type/GWP				R-32/675.0		
	Control				Electronic expansion valve		
	Circuits	Quantity			1		
Refrigerant charge	Per circuit		kg		3.80		
			TCO2eq		2.6		
Unit	Running current	Max	A		14.0		
Power supply	Phase/Frequency/Voltage	Hz/V			3~/50 /400		

(1)Cooling: EW 12°C; LW 7°C; ambient conditions: 35°CDB | (2)Cooling: EW 23°C; LW 18°C; ambient conditions: 35°CDB | (3)Condition: Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) | (4)Condition: Ta DB/WB 7°C/6°C - LWC 45°C (DT=5°C) | (5)According to EN14825 | (6)For more details, see operation range drawing | Depends on operation mode, refer to installation manual.

Air cooled mini inverter heat pump

- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- › Inverter chiller
- › Hermetically sealed swing inverter compressor
- › New casing for the outdoor units
- › Separate MMI-2 controller for indoor installation



More details and final information can be found by scanning or clicking the QR codes.




EWYA-DV3P-H-

Heating & Cooling			EWYA-D	004DV3P-H	006DV3P-H	008DV3P-H	009DV3P-H-	011DV3P-H-	014DV3P-H-	016DV3P-H-
Space cooling	A Condition Pdc 35°C	kW		-			9.35	11.6	12.8	14.0
	ηs,c	%		-			222	229	226	221
SEER				-			5.62(8)	5.79(8)	5.71(8)	5.59(8)
Space heating	Average climate water outlet 35°C	General	SCOP	4.54	4.52	4.61	4.82	4.73	4.70	4.69
			Seasonal space heating eff. class				A+++			
Cooling capacity	Nom.	kW	4.86(1)/4.52(2)	5.83(1)/5.09(2)	6.18(1)/5.44(2)	9.35(4)/9.10(5)	11.6(4)/11.5(5)	12.8(4)/12.7(5)	14.0(4)/15.3(5)	
Heating capacity	Nom.	kW	4.30(1)/4.60(2)	6.00(1)/5.90(2)	7.50(1)/7.80(2)	9.37(6)/9.00(7)	10.6(6)/9.82(7)	12.0(6)/12.5(7)	16.0(6)/16.0(7)	
Power input	Cooling Nom.	kW	0.820(1)/1.36(2)	1.08(1)/1.55(2)	1.19(1)/1.73(2)	2.79(4)/1.71(5)	3.56(4)/2.17(5)	4.06(4)/2.51(5)	4.58(4)/3.24(5)	
	Heating Nom.	kW	0.840(1)/1.26(2)	1.24(1)/1.69(2)	1.63(1)/2.23(2)	1.91(6)/2.43(7)	2.18(6)/2.68(7)	2.46(6)/3.42(7)	3.53(6)/4.56(7)	
Capacity control	Method						Variable (inverter)			
EER			5.91(1)/3.32(2)	5.40(1)/3.28(2)	5.19(1)/3.14(2)	3.35(4)/5.34(5)	3.26(4)/5.31(5)	3.16(4)/5.04(5)	3.06(4)/4.74(5)	
COP			5.10(1)/3.65(2)	4.85(1)/3.50(2)	4.60(1)/3.50(2)	4.91(6)/3.71(7)	4.83(6)/3.66(7)	4.87(6)/3.64(7)	4.53(6)/3.51(7)	
Dimensions	Unit	Height	mm	770				870		
		Width	mm		1,250				1,380	
		Depth	mm			362			460	
Weight	Unit	kg		88.0					147	
Water heat exchanger	Type						Plate heat exchanger			
	Water volume	l		1					2	
Air heat exchanger	Type						High efficiency fin and tube type with integral subcooler			
Compressor	Type						Hermetically sealed swing compressor		Hermetically sealed swing inverter compressor	
	Quantity						1			
Fan	Type						Propeller fan			
	Quantity						1			
	Air flow rate	Cooling Heating	Nom. Nom.	m³/min		-	63	70	85	
				m³/min		-	48.0	55.8	70.4	85.0
Sound power level	Cooling	Nom.	dBA	61.0(1)		62.0(1)	65.5	67.0	69.0	
	Heating	Nom.	dBA	58.0(1)	60.0(1)	62.0(1)				-
Sound pressure level	Cooling	Nom.	dBA	48.0(1)	49.0(1)	50.0(1)	44.0	47.7	50.8	51.0
	Heating	Nom.	dBA	44.0(1)	47.0(1)	49.0(1)				-
Operation range	Air side	Cooling Heating	Min.~Max. Min.~Max.	°CDB °CDB		10(3)~43			10~43	
									-25~25	
Refrigerant	Type/GWP							R-32/675.0		
	Charge	kg		1.35					-	
	Control							Electronic expansion valve		
	Circuits	Quantity				-		1		
Refrigerant charge	Per circuit	kg		-					3.80	
Unit	Running current	A		-					30.8	
Power supply	Phase/Frequency/Voltage	Hz/V		1~/50 /230 +/-10%					1~/50 /230	

(1)Condition 1: cooling Ta 35°C - LWE 18°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) | (2)Condition 2: cooling Ta 35°C - LWE 7°C (DT = 5°C); heating Ta DB/WB 7°C/6°C - LWC 45°C (DT = 5°C) | (3)For more details, see operation range drawing | (4)Cooling: EW 12°C; LW 7°C; ambient conditions: 35°CDB | (5)Cooling: EW 23°C; LW 18°C; ambient conditions: 35°CDB | (6)Condition: Ta DB/WB 7°C/6°C - LWC 35°C (DT = 5°C) | (7)Condition: Ta DB/WB 7°C/6°C - LWC 45°C (DT=5°C) | (8)According to EN14825 | Depends on operation mode, refer to installation manual.



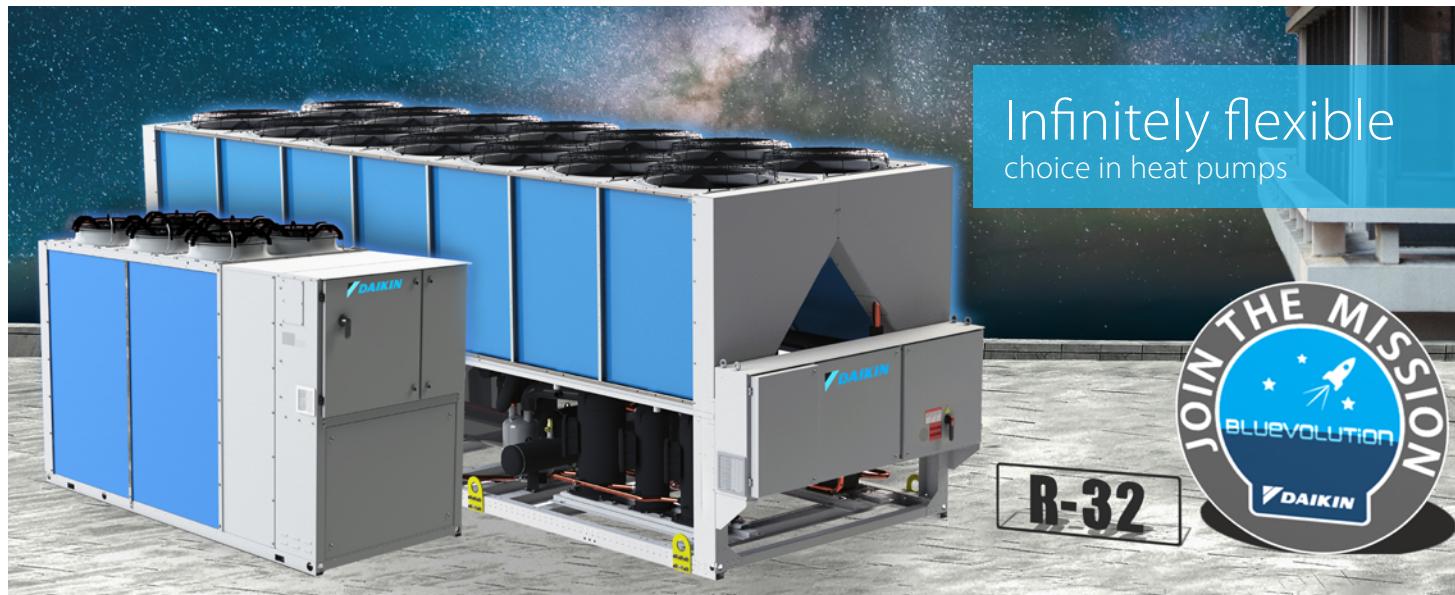

EWYT-B

Multi scroll heat pumps with R-32 refrigerant

- Top class efficiency, SEER up to 4.92 and SCOP up to 4.06
- Low environmental impact thanks to R-32 refrigerant
- Dedicated Scroll Compressors for hot water production up 60°C
- The Global Warming Potential (GWP) of R-32 refrigerant is 675, which is only one third compared to commonly used refrigerant R-410
- The low GWP R-32 refrigerant falls into category class A2L in ISO817 and it can be safely used in many applications including chilled water systems
- As a single component refrigerant, R-32 is also easier to recycle and reuse another environmental plus in its favour

- Wide capacity range: 80 – 650 kW
- Optimized Copper -Aluminium Coils improving performances and de-frosting operation
- Silver and Gold efficiency versions
- 3 sound configurations
- 2 different layouts: Parallel Coil and Double V Coil
- One or Two independent refrigerant circuits
- Full compatibility with Daikin on Site
- Extensive option lists
- Fan speed modulation option (VFD)

Connectivity

Daikin on Site

Fully compatible with Daikin on Site cloud based platform that allows a number of advanced functionalities including:

- > Remote monitoring
- > System optimization
- > Preventive maintenance
- > Remote access with one click via LAN or 4G LTE router

Connection to Intelligent Chiller Manager

Daikin can offer the Intelligent Chiller Manager option, allowing energy optimisation of the system and, when necessary, full customization of the control solutions to the specific installation's needs even in case of more complex installation.

- > High number of units
- > Cooling and Heating mode
- > Peripheral controls



Layouts & Range overview

Parallel coils



Silver Efficiency	75-193 kW 82-213 kW	1 circuit
Gold Efficiency	80-206 kW 86-218 kW	
Silver Efficiency	189-230 kW 209-256 kW	2 circuits
Gold Efficiency	206-250 kW 215-261 kW	

Double-V coils



Silver Efficiency	270-570 kW 300-627 kW	2 circuits
Gold Efficiency	294-630 kW 306-650 kW	

Extensive option lists Including new options:

Partial heat recovery

Introduction of condensation control allowing to maintain heat recovery capacity at lower ambient temperatures with unit operating at full capacity

Buffer tank

Unit mounted buffer tank available all across the range for plug and play solution.

VFD pumps and variable flow control

- › Variable pump speed control via external 0-10 volt signal
- › "Thermostat on" and "thermostat off" pump speed management
- › Variable primary flow control


Master/Slave supplied as standard

Master/Slave functionality allowing to manage up to 4 units on the same system without the need of external control devices.

Fan Silent Mode


The parallel coil units and units with VFD option are standardly equipped with Fan Silent Mode, which reduces fan velocity and therefore unit sound emission on scheduled time bands, enhancing comfort during night operation.

Pumping energy

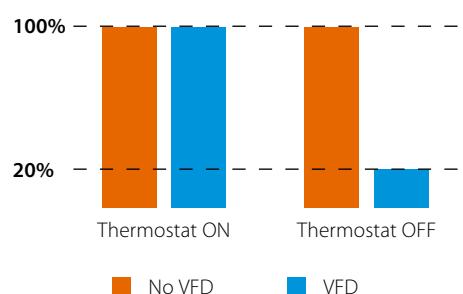

Air cooled multi-scroll heat pump, standard efficiency, standard/low sound

- › First R-32 air cooled heat pump with Scroll compressors in the market
- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- › One or two truly independent refrigerant circuits for outstanding reliability
- › MicroTech 4 controller: sophisticated adaptive software logic for stable operating conditions
- › Low operating cost and extended operating life thanks to the careful design aimed to optimize the energy efficiency of the chillers and to improve installation profitability, effectiveness and economical management
- › Fan speed modulation to ensure precise airflow control and optimized condensing temperature
- › Possible to set up detailed time bands to reduce fan rotation speed and therefore sound emission
- › Thanks to the Dynamic Condensing Pressure Management, the chiller controller adjusts the condensing pressure set-point to minimize the overall chiller power input

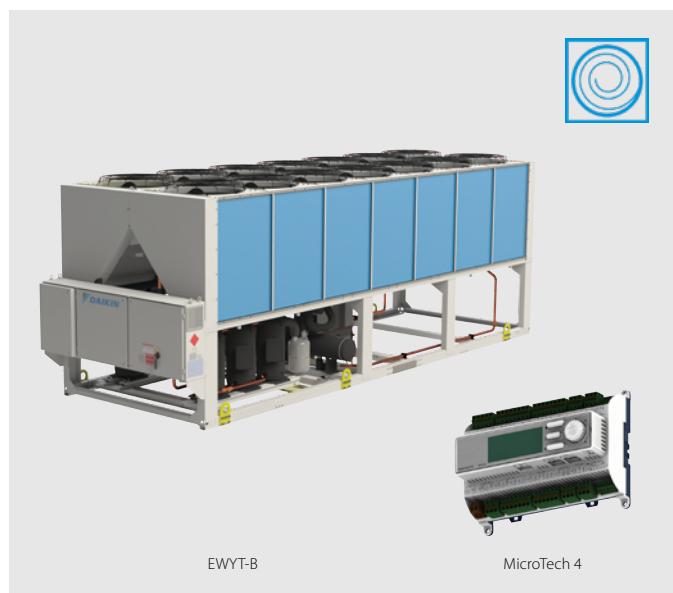

More details and final information can be found by scanning or clicking the QR codes.



EWYT-B-SS



EWYT-B-SL

Heating & Cooling			EWYT-B-SS/SL	085	105	135	175	205	215	235	255	300	340	390	430	490	540	590	630	300-	340-	390-	430-	490-	540-	590-	630-			
SEER				3.9	3.98	3.9	4.01	3.96	3.9	3.96	3.9	3.99	4.1	3.99	4	4.23	4.17	4.25	4.16	4.28	4.16	4.12	4.37	4.35	4.29	4.38				
Space heating	Average climate water outlet 35°C	General	SCOP	3.34	3.41	3.36	3.40	3.37	3.40	3.34	3.29	3.27	3.28	3.35	3.33	3.37	3.35	3.38	3.37	3.38	3.39	3.46	3.44	3.47	3.46	3.50	3.47			
Cooling capacity	Nom.	kW		75	98	120	153	189	193	212	230	270	317	350	375	434	482	531	570	270	317	350	375	434	482	531	570			
Heating capacity	Nom.	kW		82.24	106.24	132.23	169.8	209.28	213.33	236.16	256.09	300.01	342.79	389.93	432.79	486.98	541.54	591.29	627.45	300.01	342.79	389.93	432.79	486.98	541.54	591.29	627.45			
Power input	Cooling Nom.	kW		28	36.6	44.6	57.8	71.3	72.1	78.7	86.4	102	117	132	147	171	192	206	219	102	117	133	147	171	192	207	219			
	Heating Nom.	kW		28.16	36.5	45.26	58.94	72.36	73.82	82.07	86.96	104.12	116.23	135.61	150.48	166.78	185.15	201.91	214.4	104.41	116.59	136.09	150.96	167.26	185.62	202.51	215			
Capacity control	Method																													
	Minimum capacity	%		50	38	50	38	19	50	17	25	22	19	17	25	22	19	18	17	22	19	17	25	22	19	18	17			
EER				2.69	2.68	2.7	2.65	2.66	2.67	2.69	2.67	2.65	2.69	2.63	2.55	2.54	2.51	2.57	2.6	2.64	2.69	2.62	2.54	2.53	2.5	2.56	2.59			
COP				2.921	2.911	2.922	2.881	2.892	2.89	2.877	2.945	2.882	2.949	2.875	2.876	2.92	2.925	2.928	2.927	2.873	2.94	2.865	2.867	2.911	2.917	2.92	2.918			
IPLV				4.43	4.4	4.32	4.28	4.33	4.36	4.31	4.35	4.2	4.31	4.2	4.31	4.46	4.52	4.44	4.53	4.35	4.67	4.45	4.54	4.68	4.71	4.73	4.8			
Dimensions	Unit	Height	mm																											
		Width	mm																											
		Length	mm	2,225	2,825	3,425	4,350	4,025	4,950	3,225																				
Weight (SS)	Unit	kg		955	1,065	1,165	1,320	1,500	1,800	1,825	2,100	2,250	3,180	3,190	3,180	3,370	4,267	5,025	3,225	4,125	5,025									
	Operation weight	kg		962	1,072	1,172	1,327	1,511	1,811	1,839	2,114	2,270	3,200	3,210	3,207	3,397	4,302	4,308	3,220	4,144	5,025	3,209.71	3,207.27	3,397.27	4,302.37	4,308.08				
Weight (SL)	Unit	kg		985	1,095	1,195	1,350	1,530	1,830	1,855	2,260	2,410	3,340	3,350	3,340	3,350	4,427	5,025	3,225	4,125	5,025									
	Operation weight	kg		992	1,102	1,202	1,357	1,541	1,841	1,869	2,274	2,430	3,360	3,370	3,367	3,357	4,462	4,468	5,025	3,220	4,125	5,025								
Water heat exchanger	Type																													
	Water volume	l		7		11		14		20		27		35		41		14		20		27		35		41				
	Water flow rate Cooling Nom.	l/s		3.6	4.7	5.8	7.3	9	9.2	10.1	11	12.9	15.1	16.7	17.9	20.7	23	25.3	27.2	12.9	15.1	16.7	17.9	20.7	23	25.3	27.2			
	Water pressure drop	kPa		14.9	24.1	35.1	54	45	46.4	55.1	45.1	60.2	49.2	58.8	66.7	58.7	71.2	58.3	66.1	60.2	49.2	58.8	66.7	58.7	71.2	58.3	66.1			
Air heat exchanger	Type																													
Compressor	Type																													
	Quantity			2		4		2		4		5		6		4		5		6		8		10						
Fan	Type																													
	Quantity			4	6	8	10	12	5	6		8		10		5		6		8		10								
	Air flow rate Nom.	l/s		6,888	10,809	14,412	13,777	17,220	17,221	20,664	28,003	33,604	46,854	45,830	44,806	57,288	56,008	28,003	33,604	46,854	45,830	44,806	57,288	56,008						
	Speed	rpm																												
Sound power level (SS) Cooling	Nom.	dBA		84	87	89	91	90	92	91	92	94	95	96	96.3	96.6	96.8	97.5	97.8	94	94.9	95.9	96.3	96.6	96.8	97.5	97.8			
Sound power level (SL) Cooling	Nom.	dBA		83	85	87	88					91	92	93	92.9	93	93.9	90.8	91.6	92.8	92.9	93	93.9							
Sound pressure level (SS) Cooling	Nom.	dBA		66	69	71	73	71	74	72	73	74	75	76	76.3	76.6	76.8	77.1	77.4	74.5	75.4	75.9	76.3	76.6	76.8	77.1	77.4			
Sound pressure level (SL) Cooling	Nom.	dBA		65	67	69	70	69				70	71	72	73	72.9	73	73.5	71.3	72.1	72.8	72.9	73	73.5						
Refrigerant	Type																													
	Charge (SS)	kg		12.7	15.8	18.5	26	34	34.8	37.2	41.4	41.7	48	47.1	48.6	60.3	70	78.5	87	41.7	48	47.1	48.6	60.3	70	78.5	87			
	Charge (SL)	kg		12.7	15.8	18.5	26	34	34.8	37.2	41.4	39.9	48	48.1	48.6	50	70	78.5	80	39.9	48	48.1	48.6	50	70	78.5	80			
Piping connections	Evaporator water inlet/outlet (OD)																													
	Starting current	A		211.0	327.0	343.0	464.0	408.0	495.0	425.0	439.0	564.0	598.0	636.0	666.0	712.0	757.0	795.0	825.0	564	598	636	666	712	757	795	825			
	Running current	A		54.0	66.0	76.0	99.0	125.0	123.0	133.0	146.0	174.0	198.0	227.0	253.0	291.0	328.0	353.0	372.0	175	198	228	253	292	329	354	373			
	Running current	A		68.0	85.0	101.0	131.0	166.0	163.0	183.0	197.0	232.0	266.0	304.0	334.0	379.0	425.0	463.0	493.0	232	266	304	334	379	425	463	493			
Power supply	Phase/Frequency/Voltage	Hz/V																												

Air cooled multi-scroll heat pump, standard efficiency, reduced sound

- › First R-32 air cooled heat pump with Scroll compressors in the market
- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- › One or two truly independent refrigerant circuits for outstanding reliability
- › MicroTech 4 controller: sophisticated adaptive software logic for stable operating conditions
- › Low operating cost and extended operating life thanks to the careful design aimed to optimize the energy efficiency of the chillers and to improve installation profitability, effectiveness and economical management
- › Fan speed modulation to ensure precise airflow control and optimized condensing temperature
- › Possible to set up detailed time bands to reduce fan rotation speed and therefore sound emission
- › Thanks to the Dynamic Condensing Pressure Management, the chiller controller adjusts the condensing pressure set-point to minimize the overall chiller power input



More details and final information
can be found by scanning or
clicking the QR codes.



EWYT-B-SR

Heating & Cooling			EWYT-B-SR																		
			085	105	135	175	205	215	235	255	300	340	390	430	490	540	590	630			
SEER			3.82	3.93	3.87	3.96	3.92	3.82	3.83	3.84	4.18	4.37	4.21	4.19	4.49	4.46	4.52				
Space heating			3.35	3.40	3.37	3.42	3.44	3.43	3.32	3.33	3.42	3.49	3.57	3.65	3.60	3.67	3.66				
 Average climate water outlet 35°C			Seasonal space heating eff. class			A+			-												
Cooling capacity Nom.			kW	74	96	119	150	186	189	209	226	265	311	344	368	424	470	519	557		
Heating capacity Nom.			kW	80.91	105.24	131.02	167.11	207.27	209.99	233.05	251.28	295.81	335.24	384.62	426.79	477.49	528.73	581.03	615.34		
Power input			Cooling Nom.	kW	28.7	37.4	45.5	59.5	73.2	74.3	80.7	88.8	102	117	131	147	172	195	207	221	
Heating Nom.			kW	27.99	36.24	44.84	58.45	71.9	73.28	81.39	86.29	102.09	113.54	132.02	144.34	160.28	178.33	194.13	206.57		
Capacity control			Method	Step																	
Minimum capacity			%	50	38	50	38	19	50	17	25	22	19	17	25	22	19	18	17		
EER				2.56	2.58	2.61	2.53	2.54	2.55	2.59	2.55	2.59	2.64	2.61	2.5	2.46	2.41	2.5	2.51		
COP				2.891	2.904	2.922	2.859	2.883	2.866	2.863	2.912	2.898	2.953	2.913	2.957	2.979	2.965	2.993	2.979		
IPLV				4.36	4.24	4.3	4.38	4.29	4.28	4.26	4.29	4.69	4.58	4.61	4.78	4.89	4.82	4.91			
Dimensions	Unit	Height		mm																	
		Width		mm																	
		Length		2,225	2,825	3,425	4,350	4,025	4,950	mm			3,225	mm			4,125	mm			
Weight	Unit	kg		985	1,095	1,195	1,350	1,530	1,830	1,855	2,260	2,410	3,340	3,350	3,340	3,530	4,427	mm			
		kg		992	1,102	1,202	1,357	1,541	1,841	1,869	2,274	2,430	3,360	3,370	3,367	3,557	4,462	4,468	mm		
Water heat exchanger	Type	Plate heat exchanger																			
	Water volume	I	7				11				14				20			27		35	
	Water flow rate	l/s	3.5	4.6	5.7	7.2	8.9	9	10	10.8	12.7	14.8	16.4	17.5	20.2	22.4	24.8	26.6			
	Water pressure drop	kPa	14.4	23.4	34.2	52.2	43.5	44.8	53.5	43.6	58.1	47.6	57	64.4	56.3	67.8	56	63.4			
Air heat exchanger			Type	High efficiency fin and tube type																	
Compressor			Type	Scroll compressor																	
Fan	Quantity			2			4			2			4			5		6			
	Type	Direct propeller																			
	Quantity		4	6	8	10	12	15	16	18	20	22	24	26	28	30	32	34			
Air flow	Nom.	I/s	6,026	9,483	12,644	12,052	15,064	15,065	18,078	23,608	28,330	39,446	38,610	37,774	48,262	47,216	mm				
	Rate		1,200																		
	Speed	rpm	780																		
Sound power level	Cooling Nom.	dBA	78	82	84	85	84	87	86	87	88	89	89.3	89.4	89.5	90.4	90.5	mm			
Sound pressure level	Cooling Nom.	dBA	60	64	65	67	66	68	67	68	69	69	69.3	69.4	69.5	70	70.1	mm			
Refrigerant	Type	R-32																			
	Charge	kg	13.3	14.7	19.3	24.5	29	34	36.2	43	40.3	47.2	50.4	79	58.5	68.8	77.6	82			
	Circuits	Quantity		1			2			1			2			2					
Piping connections			88.9																114.3		
Unit	Starting current	A	211.0	327.0	343.0	464.0	408.0	495.0	425.0	439.0	564.0	598.0	636.0	666.0	712.0	757.0	795.0	825.0			
	Running current	A	55.0	67.0	77.0	101.0	128.0	126.0	136.0	149.0	173.0	196.0	224.0	251.0	292.0	330.0	353.0	373.0			
Unit	Running current	A	68.0	85.0	101.0	131.0	166.0	163.0	183.0	197.0	232.0	266.0	304.0	334.0	379.0	425.0	463.0	493.0			
Power supply	Phase/Frequency/Voltage	Hz/V	3~/50/400																		

Air cooled multi-scroll heat pump, high efficiency, standard/low sound



- › First R-32 air cooled heat pump with Scroll compressors in the market
 - › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
 - › One or two truly independent refrigerant circuits for outstanding reliability
 - › MicroTech 4 controller: sophisticated adaptive software logic for stable operating conditions
 - › Low operating cost and extended operating life thanks to the careful design aimed to optimize the energy efficiency of the chillers and to improve installation profitability, effectiveness and economical management
 - › Fan speed modulation to ensure precise airflow control and optimized condensing temperature
 - › Possible to set up detailed time bands to reduce fan rotation speed and therefore sound emission
 - › Thanks to the Dynamic Condensing Pressure Management, the chiller controller adjusts the condensing pressure set-point to minimize the overall chiller power input



FWYT-B-XS/XI

More details and final information can be found by scanning or clicking the QR codes.



FWYT-B-XS



FWYT-B-XI

Air cooled multi-scroll heat pump, high efficiency, reduced sound

- › First R-32 air cooled heat pump with Scroll compressors in the market
- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- › One or two truly independent refrigerant circuits for outstanding reliability
- › MicroTech 4 controller: sophisticated adaptive software logic for stable operating conditions
- › Low operating cost and extended operating life thanks to the careful design aimed to optimize the energy efficiency of the chillers and to improve installation profitability, effectiveness and economical management
- › Fan speed modulation to ensure precise airflow control and optimized condensing temperature
- › Possible to set up detailed time bands to reduce fan rotation speed and therefore sound emission
- › Thanks to the Dynamic Condensing Pressure Management, the chiller controller adjusts the condensing pressure set-point to minimize the overall chiller power input



More details and final information can be found by scanning or clicking the QR codes.



EWYT-B-XR

Heating & Cooling			EWYT-B-XR		085	115	135	175	215	215	235	265	310	350	400	440	500	560	600	630	650			
SEER					4.21	4.37	4.21	4.41	4.16	4.42	4.43	4.13	4.74	4.8	4.82	4.63	4.92	4.89	4.83	4.79	4.72			
Space heating			Average climate water outlet 35°C	General	SCOP	3.66	3.71	3.65	3.83	3.74	3.70	3.82	3.81	4.06	4.01	3.95	4.03	3.99	4.04	4.00	3.98	3.88		
					Seasonal space heating eff. class	A+											-							
Cooling capacity			Nom.		kW	79	103	124	164	203	204	227	247	282	321	364	398	458	507	548	583	600		
Heating capacity			Nom.		kW	84.9	110.32	132.02	174.14	216.57	213.48	237.57	256.58	301.04	344.8	395.81	438.23	494.13	549.6	588.57	620.71	637.4		
Power input			Cooling Nom.		kW	26.6	35.4	42.6	57.4	72.9	68.8	75.7	84.4	95.2	109	124	136	160	180	196	208	203		
			Heating Nom.		kW	25.87	32.94	38.82	51.3	64.51	62.13	68.99	75.49	86.32	99.1	114.46	124.61	143.5	161.2	175.33	186.93	193.22		
Capacity control			Method			Step																		
			Minimum capacity		%	50	38	50	38	50	19	17	25	22	19	17	25	22	19	18	17			
EER						2.98	2.9	2.92	2.86	2.79	2.97	3	2.93	2.96	2.95	2.93	2.91	2.85	2.81	2.8	2.94			
COP						3.282	3.349	3.401	3.394	3.357	3.436	3.443	3.399	3.487	3.479	3.458	3.517	3.443	3.409	3.357	3.321	3.299		
IPV						4.73	4.67	4.65	4.67	4.86	4.82	4.62	4.92	5.12	5.26	5.12	5.34	5.32	5.22	5.23	5.19			
Dimensions	Unit	Height			mm	1,800														2,514				
		Width			mm	1,195														2,282				
		Length			mm	2,825	3,425	4,025	4,625	5,550	6,150			4,125	5,025	5,925	6,825							
Weight	Unit	kg			kg	1,110	1,170	1,250	1,430	1,610	2,030	2,330	2,380	3,140	3,240	3,810	3,910	4,366	4,456	4,920	5,020			
		Operation weight			kg	1,121	1,181	1,261	1,446	1,626	2,065	2,365	2,415	3,175	3,275	3,845	3,972	4,428	4,526	4,990	5,090			
Water heat exchanger	Type					Plate heat exchanger																		
	Water volume				l	11	16	35						62	70									
	Water flow rate		Cooling Nom.		l/s	3.8	4.9	5.9	7.8	9.7	10.8	11.8	13.4	15.3	17.3	19	21.8	24.2	26.2	27.8	28.6			
Water pressure drop			Cooling Nom.		kPa	9.33	14.9	21.1	19.6	28.9	11.8	14.3	16.8	21.2	26.8	33.5	22.7	29.2	32.2	37.1	41.4	43.7		
Air heat exchanger			Type			High efficiency fin and tube type																		
Compressor			Type			Scroll compressor																		
			Quantity			2								4		5		6						
Fan	Type					Direct propeller																		
	Quantity					6	8	10	12	14	16	7	8	10	12	14								
	Air flow rate Nom.				l/s	8,298	11,630	11,064	13,830	16,596	19,362	22,128	25,074	28,656	36,808	35,820	44,169	42,984	51,531	50,148	66,104			
Sound power level			Cooling Nom.		dBA	77	81	83	85	87	84	85	86	84	85.2	85.5	86.2	86.3	86.9	87.1	91.6			
Sound pressure level			Cooling Nom.		dBA	59	63	65	67	68	65	66	64	64.8	65.1	65.4	65.5	65.8	66	70.5				
Refrigerant	Type					R-32																		
	Charge				kg	17.4	18.4	21.5	30	40	44.6	50	53.4	54.4	62	71.5	78	89	93	103.4	106	109		
	Circuits Quantity					1								2										
Piping connections			Evaporator water inlet/outlet (OD)			88.9														114.3				
Unit			Starting current Max		A	213.0	329.0	343.0	465.0	497.0	412.0	429.0	443.0	572.0	606.0	644.0	674.0	728.0	773.0	811.0	841.0			
			Running current Cooling Nom.		A	53.0	65.0	75.0	100.0	124.0	123.0	133.0	145.0	169.0	192.0	214.0	237.0	276.0	315.0	339.0	360.0	353.0		
Unit			Running current Max		A	70.0	87.0	101.0	133.0	165.0	170.0	186.0	201.0	240.0	274.0	312.0	342.0	395.0	441.0	479.0	509.0			
Power supply			Phase/Frequency/Voltage		Hz/V	3~/50/400																		

Air cooled scroll inverter heat pump, split version

- › Inverter Heat Pump in Split version
- › Daikin scroll compressor
- › High part load efficiency for low running cost
- › Glycol free application
- › Wide operation range and hot water production up to 60°C
- › Integrated hydronic module as standard

More details and final information can be found by scanning or clicking the QR codes.



EWYT-CZI



EWYT-CZI

Indoor Unit		EWYT		021CZI-A1		032CZI-A1		040CZI-A1		064CZI-A2	
Casing	Colour					Ivory white					
	Material					Galvanized and painted steel sheet					
Dimensions	Unit	Height	x	Width	x	Depth	mm			700x1,120x830	
Weight	Unit							133			144
Operation range	Heating	Ambient	Min.~Max.			°C				-20 ~35	
		Water	Min.~Max.			°C				20 ~60	
	Cooling	Ambient	Min.~Max.			°CDB				-20 ~45	
		Water	Min.~Max.			°C				4 ~20	
Sound power level	Nom.			dBA	63.0		64.5		66.0		

EWYT-CZO

Air cooled scroll inverter heat pump, split version

- › Inverter Heat Pump in Split version
- › Daikin scroll compressor
- › High part load efficiency for low running cost
- › Glycol free application
- › Wide operation range and hot water production up to 60°C
- › Integrated hydronic module as standard

More details and final information can be found by scanning or clicking the QR codes.



EWYT-CZO



EWYT-CZO

Outdoor Unit		EWYT		021CZO-A1		032CZO-A1		040CZO-A1		064CZO-A2	
Dimensions	Unit	Height	x	Width	x	Depth	mm	1,878x1,152x802			1,878x2,906x814
Weight	Unit							265	357		620
Compressor	Quantity							1	2		
	Type							Scroll compressor			
Refrigerant	Type							R-32			
	GWP							675.0			
	Charge							7.3	9.5		9.8
	Charge							4,928.0	6,422.0		6,635.0
Sound power level	Cooling	Nom.			dBA	76.0		79.0		80.0	
Sound pressure level	Cooling	Nom.			dBA	59.6		62.2		63.2	
Power supply	Phase/Frequency/Voltage				Hz/V			3N~/50 /400			



Air cooled screw inverter heat pump, standard efficiency, standard sound

- › Ideal solution for commercial comfort cooling and/or heating applications
- › Optimum ESEER values
- › 2-3 truly independent refrigerant circuits
- › Low starting current
- › DX shell and tube evaporator – one pass refrigerant side to minimize pressure drops
- › Standard electronic expansion valve
- › Optimised defrost cycles
- › Partial and total heat recovery option available
- › Power factor up to 0.95
- › PID microprocessor control



More details and final information can be found by scanning or clicking the QR codes.



EWYD-BZSS

Heating & Cooling			EWYD-BZSS		250	270	290	320	340	370	380	410	440	460	510	530	570							
SEER						-						4.57			4.55									
Space heating	Average climate water outlet 35°C	General SCOP	3.21			3.20			3.21			3.20			-									
Cooling capacity	Nom.	kW	253	272	291	323	337	363	380	411	433	455	515	533	569									
Heating capacity	Nom.	kW	271	298	325	334	350	380	412	445	465	477	532.86	560.55	618.33									
Power input	Cooling Nom.	kW	91.3	101	110	117	125	135	144	154	165	163	183	189	217									
	Heating Nom.	kW	91.4	100	108	118	126	133	143	157	167	165	177.37	184.84	208.14									
Capacity control	Method		Stepless										9.0			9								
	Minimum capacity	%	13.0										9.0			9								
EER			2.77	2.70	2.65	2.75	2.69	2.68	2.63	2.66	2.62	2.79	2.81			2.62								
ESEER			3.93	3.92	3.89	3.95	3.89	3.90	3.82	3.91	3.89	4.18	-											
COP			2.96	2.97	3.00	2.82	2.78	2.85	2.88	2.83	2.79	2.88	3.004	3.033	2.971									
IPLV			4.58	4.62	4.75	4.64	4.71	4.67	4.73	4.69	4.85	4.89	4.85	4.85	4.77									
Dimensions	Unit	Height	mm	2,335										2,280	2,280									
		Width	mm	2,254										2,254										
		Length	mm	3,547			4,428			5,329			6,659	6,659										
Weight	Unit		kg	3,410	3,455	3,500	3,870	3,940	4,010	4,390	5,015	5,495	5,735											
	Operation weight	kg	3,550	3,595	3,640	4,010	4,068	4,138	4,518	5,255	5,724	5,964	5,953											
Water heat exchanger	Type			Single pass shell & tube										Shell and tube										
	Water volume	l		138			133			128			240	229			218							
	Water flow rate	Cooling Nom.	l/s	12.1	13.0	13.9	15.5	16.2	17.4	18.2	19.7	20.8	21.8	24.7	25.5	27.3								
	Water flow rate	Heating Nom.	l/s	13.1	14.4	15.7	16.1	16.9	18.3	19.8	21.4	22.4	23.0	-										
	Water pressure drop	Cooling Nom.	kPa	40	46	44	50	55	60	65	74	80	47	68.4	46.5	52.4								
	Water pressure drop	Heating Nom.	kPa	30	35	52	37	40	45	51	59	64	42	-										
Air heat exchanger	Type			High efficiency fin and tube type with integral subcooler										High efficiency fin and tube type										
Compressor	Type			Single screw compressor										3										
	Quantity			2			3			3			3											
Fan	Type			Direct propeller										12			12							
	Quantity			6			8			10			12	63,458			62,640							
	Air flow rate Nom.	l/s		31,729	31,422	31,115	42,306	42,337	41,487	52,882	63,458	62,640	61,652	48,191	900			900						
	Speed	rpm		900										900										
Sound power level	Cooling Nom.	dBA		101			102			104			103.6											
Sound pressure level	Cooling Nom.	dBA		82			83			84			83.7											
Operation range	Air side	Cooling Min.~Max.	°CDB	-10~45										~~										
	Heating	Min.~Max.	°CDB	-10~20										~~										
	Water side	Cooling Min.~Max.	°CDB	-8~15										~~										
	Heating	Min.~Max.	°CDB	35~55										~~										
Refrigerant	Type/GWP			R-134a/1,430										R-134a/-										
	Charge	kg		-										141			147							
	Circuits	Quantity		2			3			3			3			3								
Refrigerant charge	Per circuit	kg	43.0	44.0	43.0	46.0	46.5	47.0	50.0	47.0	47.0	47.0	-			-								
	Per circuit	TCO2eq	61.5	62.9	61.5	65.8	66.5	67.2	71.5	67.2	67.2	67.2	-			-								
Piping connections	Evaporator water inlet/outlet (OD)			139.7mm										219.1mm										
Unit	Starting current Max	A		150			181			204			224	238	245	327	355	344						
	Running current Max	A	137	150	164	176	188	202	214	229	244	246	298	310	349									
	Power supply	Phase/Frequency/Voltage	Hz/V	211	212	254	288	316	336	329	433	474	474	458	3~50/400			3~50/400						

Air cooled screw inverter heat pump, standard efficiency, low sound

- › Ideal solution for commercial comfort cooling and/or heating applications
- › Optimum ESEER values
- › 2-3 truly independent refrigerant circuits
- › Low starting current
- › DX shell and tube evaporator – one pass refrigerant side to minimize pressure drops
- › Standard electronic expansion valve
- › Optimised defrost cycles
- › Partial and total heat recovery option available
- › Power factor up to 0.95
- › PID microprocessor control



More details and final information can be found by scanning or clicking the QR codes.



EWYD-BZSL

Heating & Cooling			EWYD-BZSL	250	270	290	320	330	360	370	400	430	450	510	530	570		
SEER							-						4.56	4.6	4.55			
Space heating	Average climate water outlet 35°C	General	SCOP	3.21			3.20			3.21			3.20					
Cooling capacity	Nom.	kW	247	265	290	315	330	353	370	401	423	446	503	519	569			
Heating capacity	Nom.	kW	271	298	325	334	350	380	412	445	465	477	532.86	560.55	618.33			
Power input	Cooling Nom.	kW	89.5	99.5	110	115	123	134	144	151	163	158	178	185	217			
	Heating Nom.	kW	91.4	100	108	118	126	133	143	157	167	165	177.37	184.84	208.14			
Capacity control	Method			Stepless								9.0	9					
	Minimum capacity	%		13.0								5.07	5.03	4.99	4.89			
EER				2.76	2.66	2.62	2.75	2.68	2.64	2.57	2.66	2.59	2.83	2.82	2.8	2.62		
ESEER				4.06	4.04	4.03	4.17	4.09	4.04	4.01	4.06	4.02	4.18	-				
COP				2.96	2.97	3.00	2.82	2.78	2.85	2.88	2.83	2.79	2.88	3.004	3.033	2.971		
IPLV				4.90	4.96	4.91	5.17	5.08	5.12	5.06	5.22	5.13	5.07	5.03	4.99	4.89		
Dimensions	Unit	Height	mm	2,335								2,280	2,280					
		Width	mm	2,254								2,254						
		Length	mm	3,547			4,428			5,329			6,659	6,659				
Weight	Unit	kg	3,750	3,795	3,840	4,210			4,280	4,350	4,730	5,525	6,005	6,245				
	Operation weight	kg	3,888	3,933	3,978	4,343			4,408	4,478	4,858	5,765	6,234	6,474	6,463			
Water heat exchanger	Type			Single pass shell & tube								Shell and tube						
	Water volume	l	138			133			128			240	229	218				
	Water flow rate	Cooling Nom.	l/s	11.8	12.7	13.9	15.1	15.8	16.9	17.7	19.2	20.3	21.4	24.1	24.9	27.3		
	Water pressure drop	Heating Nom.	l/s	13.1	14.4	15.7	16.1	16.9	18.3	19.8	21.4	22.4	23.0	-				
	Water	Cooling Nom.	kPa	38	44	42	48	53	57	62	71	77	45	65.5	44.4	52.4		
	Water	Heating Nom.	kPa	30	35	52	37	40	45	51	59	64	42	-				
Air heat exchanger	Type			High efficiency fin and tube type with integral subcooler								High efficiency fin and tube type						
Compressor	Type			Single screw compressor								2	3	3				
Fan	Type			Direct propeller														
	Quantity			6	8			10			12	12						
	Air flow rate	Nom.	l/s	-			-			48,415			47,732	48,191				
	Cooling	Nom.	l/s	24,432	24,264	24,095	32,576	32,628	32,127	40,720	48,863	-						
	Speed	rpm		700								900						
Sound power level	Cooling Nom.	dBA	94			95			97			97						
Sound pressure level	Cooling Nom.	dBA	76								77							
Operation range	Air side	Cooling Min.~Max.	°CDB	-10~45								~~						
	Heating	Min.~Max.	°CDB	-10~20								~~						
	Water side	Cooling Min.~Max.	°CDB	-8~15								~~						
Operation range	Water side	Heating Min.~Max.	°CDB	35~55								~~						
Refrigerant	Type/GWP			R-134a/1,430								R-134a/-						
	Charge	kg	-								141							
	Circuits	Quantity		2								3						
Refrigerant charge	Per circuit	kg	43.0	44.0	43.0	46.0	46.5	47.0	50.0	47.0	-							
	Per circuit	TCO2eq	61.5	62.9	61.5	65.8	66.5	67.2	71.5	67.2	-							
Piping connections	Evaporator water inlet/outlet (OD)		139.7mm								219.1mm							
Unit	Starting current	A	145	146			176	199			217	231	234	316	344			
	Running current	A	134	148	163	171	184	199	212	224	240	238	291	305	349			
	Max	A	202	203			243	277			302	322	313	416	458			
Power supply	Phase/Frequency/Voltage	Hz/V	3~/50/400								3~/50/400							

EWYD-4Z Air to water Multipurpose unit



4-pipe system solution with full inverter technology
For independent and simultaneous cooling and heating all year round

1

Top class efficiency

Total Energy Ratio up to 8.8

Full inverter technology:
the best choice for
every application

Daikin single screw compressor with integrated inverter and Variable Volume Ratio Technology

The inverter integrated in the compressor is refrigerant cooled:

- › Safe and robust cooling system, totally independent from outdoor ambient conditions and air quality.
- › Suitable even for aggressive installation such as industrial or desert application.

The volume ratio will change by moving the sliding valves. **VVR** changes the point at which the gas leaves the compressor, and therefore changes the pressures at discharge which will be optimal at any condition.

2

Easy part load calculation
via the tool CSS WEB

Upon defining the design condition in the unit selection page it is possible to calculate the unit performances in every in-between condition with a different load

3

Best solution for simultaneous
cooling and heating

Big multipurpose buildings, hotels, hospital are just
a few examples of application for multipurpose units

**Check on
YouTube**

[www.youtube.com/
DaikinEurope](http://www.youtube.com/DaikinEurope)

› Daikin EWYD-4Z
Multipurpose Unit




› Daikin EWYD-4Z –
Multipurpose Unit –
Behind the scenes



Air to Water Multipurpose unit

- › Best solution for independent and simultaneous cooling and heating all year round
- › Daikin single screw compressor with integrated inverter and Variable Volume Ratio Technology
- › High Efficiency Inverter fans with optimized geometry ensures the best ratio between airflow and power input.
- › Wide operating envelope for cooling and heating with extra capacity in Boosted operation and Rapid Restart functionality

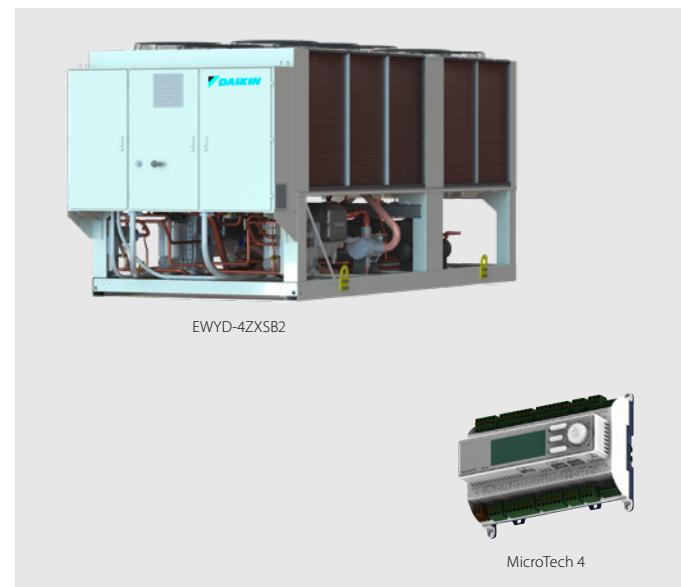

More details and final information
can be found by scanning or
clicking the QR codes.



EWYD-4ZXS2

Multipurpose	EWYD-4ZXS2	400	450	500	550	600	650	700	800
Air to water – cooling only (1)	Nominal Rated Capacity – Net kW	402.4	438.4	502.8	523.4	602.4	653.7	702.9	785.7
	EER – Net	3.17	3.15	3.25	3.08	3.25	3.19	3.37	3.29
Air to water – heating only (2)	Nom. Rated Capacity – Net kW	402.7	439.7	503.5	545.2	600.9	654.7	702.4	803.0
	COP – Net	3.33	3.41	3.45	3.44	3.45	3.38	3.55	3.54
Water to water – Cooling + heating (3)	Nom. Rated Capacity COOLNG – Net kW	313.2	351.6	393.9	430.4	479.4	516	553.3	634.4
	Nom. Rated Capacity HEATING – Net kW	402.4	449.3	503.4	549.4	608.8	658.3	707.1	808.9
	TER – Net	8.03	8.19	8.2	8.24	8.4	8.25	8.2	8.27
Dimensions	Height mm					2,465			
	Width mm					2,285			
Weight	Length mm	5,825		6,725		7,625		8,525	
	Unit Weight kg	6,075	6,095	6,870	6,870	7,850	8,435	9,405	9,430
	Operating Weight kg	6,540	6,560	7,560	7,560	8,935	9,540	10,785	10,820
	Cold/Hot side water connections mm				219.1				
Sound level	Sound Power – Cooling (4) dB(A)	99	98	99		100		102	
	Sound Pressure – Cooling at 1 m (5) dB(A)	78	77	78		79		80	
Water heat exchangers	Cold Side	Water Volume l	126	126	214	214	369	361	468
		Water flow rate (1) l/s	19.3	21.0	24.1	25.1	28.8	31.3	33.6
		Water pressure drop (1) kPa	42.0	50.8	40.1	47.8	48.0	34.2	40.7
	Hot Side	Water Volume l	126	126	214	214	369	361	468
		Water flow rate (2) l/s	9.1	9.1	13.4	13.4	14.6	19.5	20.8
		Water pressure drop (2) kPa	19.4	21.146	24.3	26.334	29	31.6	33.9
Fan	Quantity n	10		12		14		16	
	Nominal air flow (1) l/s	56,550		67,860		79,170		90,480	
Compressor	Type				Single screw				
	Oil charge l			28				38	
Refrigerant circuit	Quantity n.			2					
	Refrigerant type			R134a					
	Refrigerant charge kg	198	207	200	219	247	260	328	354
Power Supply	Circuits n.			2					
	Phase/Frequency/Voltage Hz/V			3~50/400					

Fluid: Water; Fouling factor = 0

(1) Operation in Air to water "Cooling only" mode rated at 35°C ambient temperature, 50% R.H.; Entering water temperature 12°C, Outlet water temperature 7°C.

(2) Operation in Air to water "Heating only" mode rated at 7°C ambient temperature, 85% R.H.; Entering water temperature 40°C, Outlet water temperature 45°C.

(3) Operation in Water to water "Cooling + Heating" mode rated with water flowing on cold and hot heat exchangers determined respectively at conditions (1)

and (2) - Chilled water outlet temperature 7°C, Hot water outlet temperature 45°C.

(4) Sound power level are referred to condition (1) for Cooling and (2) for Heating. The data are measured in accordance with ISO 9614 and Eurovent 8/1 for Eurovent certified units.


The certification refers only to the overall sound power level.

(5) Sound pressure is calculated from the sound power level and it is for information only and not considered binding.

All the above data are referred to standard units without options and are subject to change without notice.

Air to Water Multipurpose unit

- › Best solution for independent and simultaneous cooling and heating all year round
- › Daikin single screw compressor with integrated inverter and Variable Volume Ratio Technology
- › High Efficiency Inverter fans with optimized geometry ensures the best ratio between airflow and power input.
- › Wide operating envelope for cooling and heating with extra capacity in Boosted operation and Rapid Restart functionality

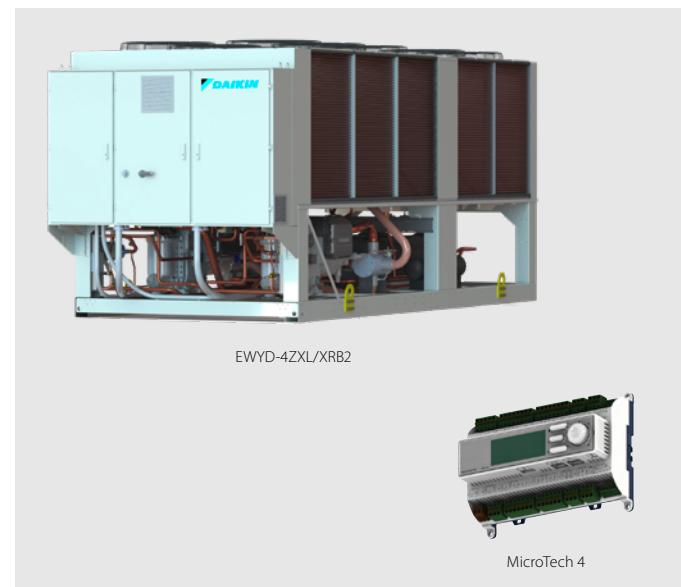

More details and final information
can be found by scanning or
clicking the QR codes.



EWYD-4ZXR2

Multipurpose	EWYD-4ZXR2	400	450	500	550	600	650	700	800
Air to water – cooling only (1)	Nominal Rated Capacity – Net kW	357.9	400.4	451.9	496.2	548.0	596.5	619.1	690.0
	EER – Net	3.05	3.06	3.12	3.06	3.11	3.07	3.19	3.08
Air to water – heating only (2)	Nom. Rated Capacity – Net kW	358.3	398.7	452.2	493.4	550.7	601	620.9	690.8
	COP – Net	3.48	3.65	3.65	3.63	3.59	3.55	3.67	3.71
Water to water – Cooling + heating (3)	Nom. Rated Capacity COOLNG – Net kW	281.5	312.7	351.1	383.1	435.2	473.1	489.3	543.8
	Nom. Rated Capacity HEATING – Net kW	361.4	399.5	448.1	487.9	550.5	602.1	625.3	693.3
	TER – Net	8.04	8.20	8.24	8.31	8.55	8.33	8.19	8.27
Dimensions	Height mm					2,465			
	Width mm					2,285			
Weight	Length mm		5,825		6,725		7,625		8,525
	Unit Weight kg	6,240	6,260	7,035	7,035	8,015	8,600	9,690	9,715
	Operating Weight kg	6,705	6,725	7,725	7,725	9,100	9,705	11,075	11,110
Sound level	Cold/Hot side water connections mm				219.1				
	Sound Power – Cooling (4) dB(A)	87	86	87		88		90	
	Sound Pressure – Cooling at 1 m (5) dB(A)			66			68	69	
Water heat exchangers	Cold Side	Water Volume l	126		214	369	361		468
		Water flow rate (1) l/s	17.1	19.2	21.6	23.7	26.2	28.5	29.6
		Water pressure drop (1) kPa	31.8	37.1	31.7	38.7	39	27	33.7
	Hot Side	Water Volume l	126	126	214	214	369	361	468
		Water flow rate (2) l/s	17.3	19.2	21.8	23.8	26.6	29.0	30.0
		Water pressure drop (2) kPa	31.8	38.5	27.7	33.6	32	23.8	24.4
Fan	Quantity n	10		12	14		16		
	Nominal air flow (1) l/s	36,110		43,332	50,554		57,776		
Compressor	Type				Single screw				
	Oil charge l			28			38		
	Quantity n.			2					
Refrigerant circuit	Refrigerant type				R134a				
	Refrigerant charge kg	206	207	224	226	248	260	320	348
	Circuits n.			2					
Power Supply	Phase/Frequency/Voltage Hz/V				3~/50/400				

Fluid: Water; Fouling factor = 0

(1) Operation in Air to water "Cooling only" mode rated at 35°C ambient temperature, 50% R.H.; Entering water temperature 12°C, Outlet water temperature 7°C.

(2) Operation in Air to water "Heating only" mode rated at 7°C ambient temperature, 85% R.H.; Entering water temperature 40°C, Outlet water temperature 45°C.

(3) Operation in Water to water "Cooling + Heating" mode rated with water flowing on cold and hot heat exchangers determined respectively at conditions (1)


and (2) - Chilled water outlet temperature 7°C, Hot water outlet temperature 45°C.

(4) Sound power level are referred to condition (1) for Cooling and (2) for Heating. The data are measured in accordance with ISO 9614 and Eurovent 8/1 for Eurovent certified units.

The certification refers only to the overall sound power level.

(5) Sound pressure is calculated from the sound power level and it is for information only and not considered binding.

All the above data are referred to standard units without options and are subject to change without notice.

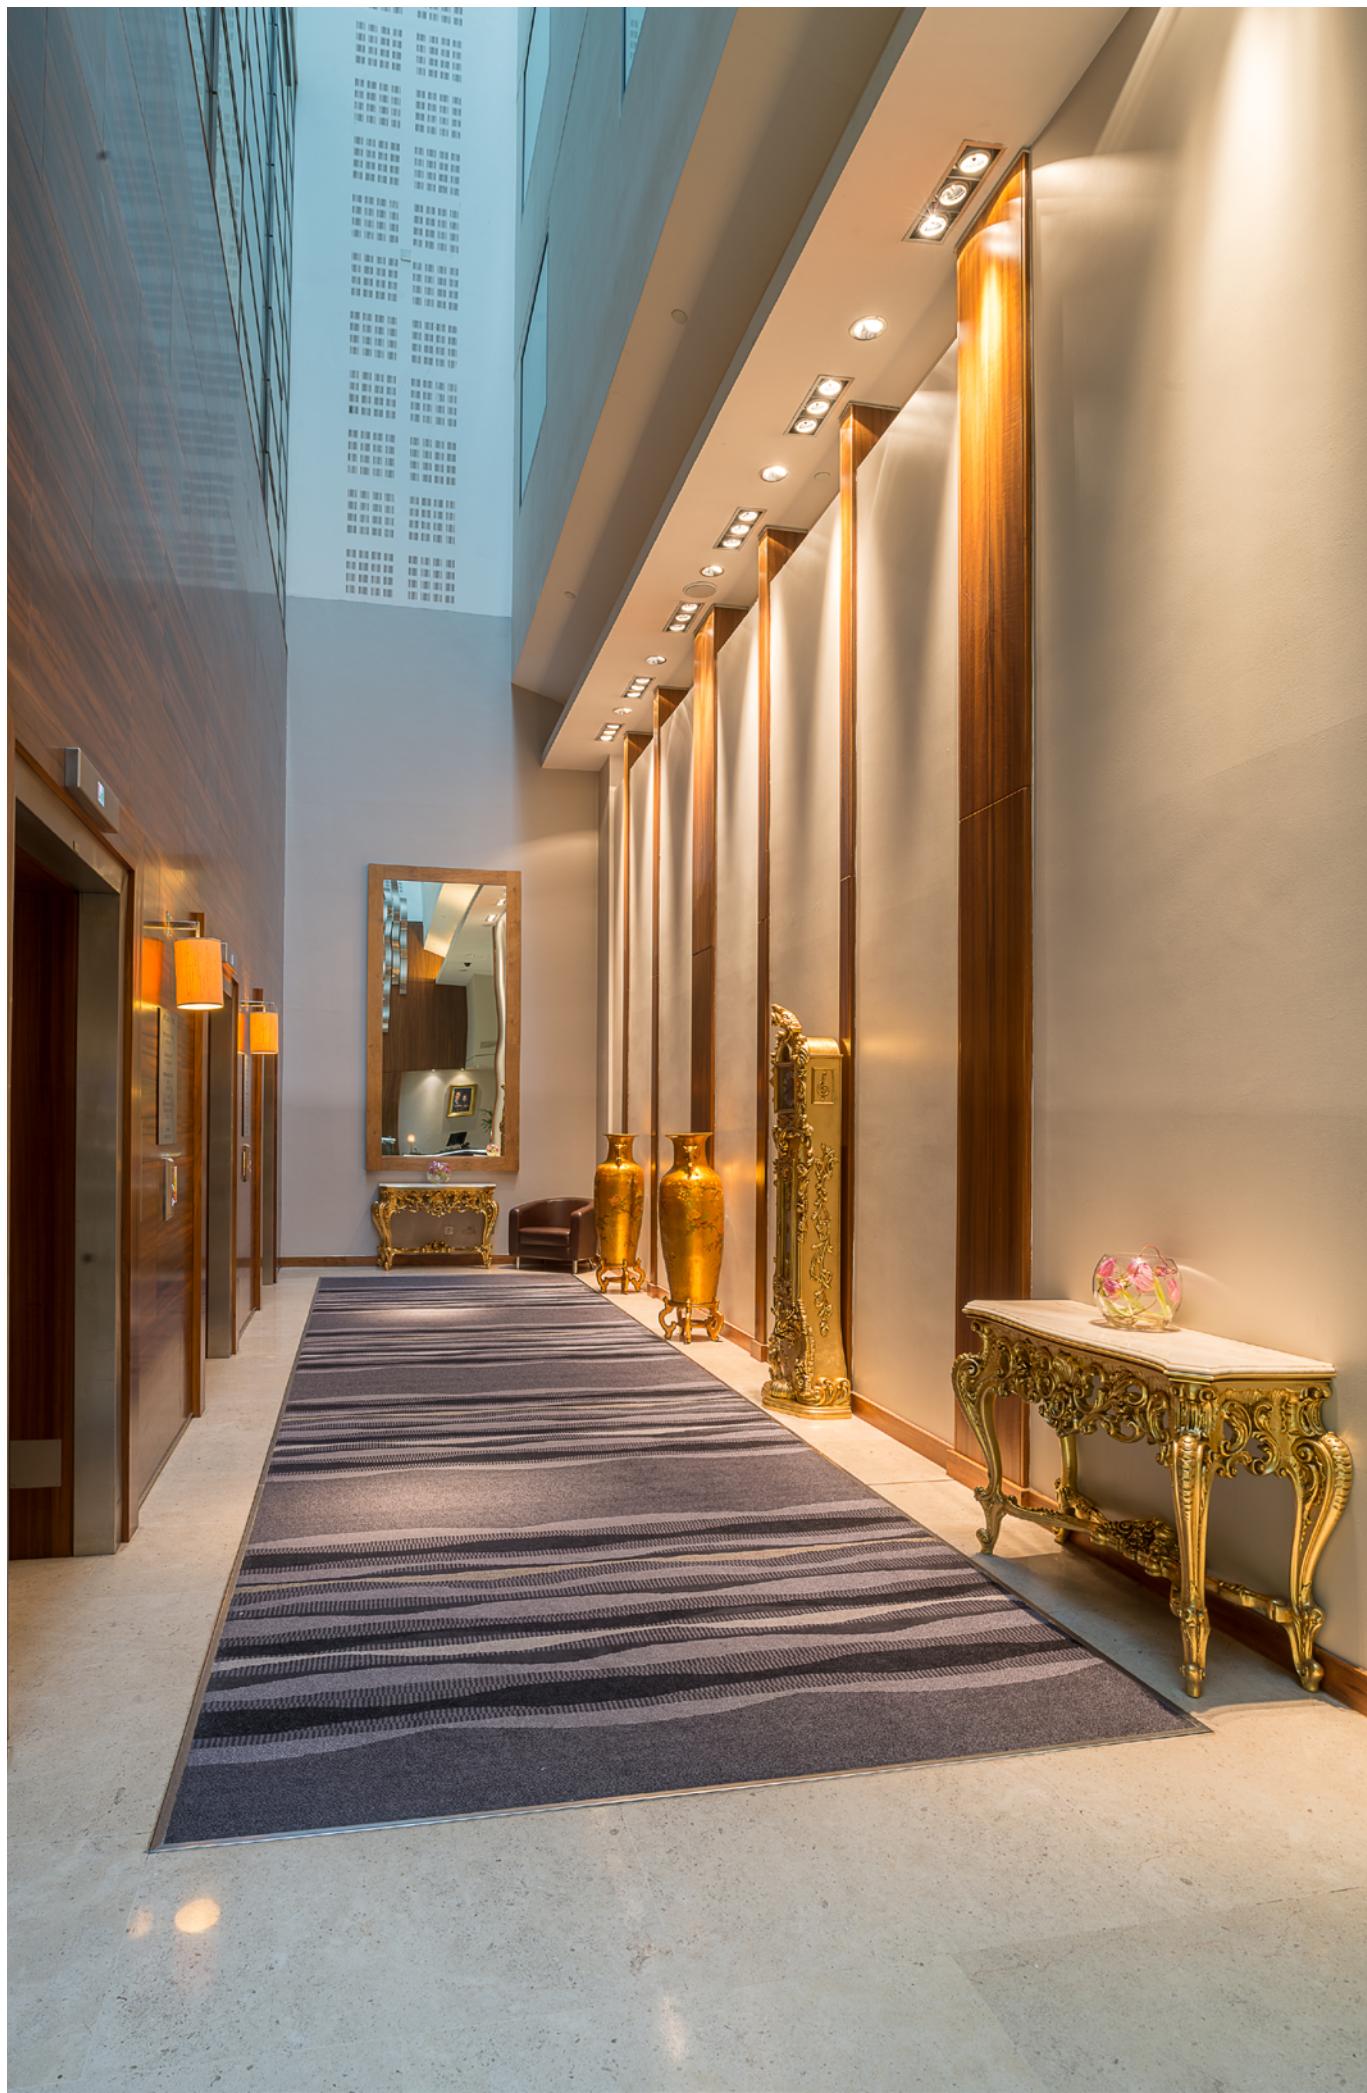

Air cooled screw condensing unit, standard efficiency, standard sound

- › One refrigerant circuit with single screw compressor
- › Compact design
- › Large operation range (ambient temperature down to -18°C)
- › Extensive option list (heat recovery option available)



More details and final information
can be found by scanning or
clicking the QR codes.



ERAD-E-SS

Cooling only			ERAD-E-SS	120	140	170	200	220	250	310	370	440	490											
Cooling capacity	Nom.	kW	121	144	165	196	219	251	309	370	435	488												
Power input	Cooling Nom.	kW	42.1	51.2	57.7	65.6	74.2	77.0	93.8	123	148	161												
Capacity control	Method		Stepless																					
	Minimum capacity	%	25.0																					
EER			2.88	2.82	2.86	2.99	2.95	3.27	3.30	3.02	2.95	3.02												
Dimensions	Unit	Height	mm	2,273						2,223														
		Width	mm	1,292						2,236														
		Length	mm	2,165	3,065	3,965			3,070															
Weight	Unit	kg	1,584	1,741			1,936	2,679			2,756													
		Operation weight	kg	1,617	1,781	1,981																		
Air heat exchanger	Type	High efficiency fin and tube type with integral subcooler																						
Compressor	Type	Single screw compressor																						
	Quantity	1																						
Fan	Type	Direct propeller																						
	Air flow rate	Nom.	I/s	10,924	10,576	16,386	15,865	21,848	21,153	32,772	31,729													
	Quantity			2	3	4				6														
Sound power level	Speed	Cooling Nom.	rpm	900																				
	Cooling	Nom.	dBA	92.0			93.0	94.0			95.0													
	Sound pressure level	Cooling Nom.	dBA	74.0			75.0			76.0														
Operation range	Saturated suction temp.	°C	-9~12																					
	Condenser inlet temp.	°C	-18~48																					
Refrigerant	Type / GWP	R-134a / 1,430																						
	Circuits	Quantity		1																				
Piping connections	Evaporator water inlet/outlet (OD)	76mm																						
	Maximum starting current	A	151			195			288			330	410											
Unit	Nominal running current (RLA)	Cooling	A	72	88	98	110	125	129	158	204	244	266											
	Maximum running current		A	86	103	119	132	157	164	198	242	284	298											
Power supply	Phase/Frequency/Voltage	Hz/V	3~/50/400																					

Air cooled screw condensing unit, standard efficiency, low sound

- › One refrigerant circuit with single screw compressor
- › Compact design
- › Large operation range (ambient temperature down to -18°C)
- › Extensive option list (heat recovery option available)



More details and final information
can be found by scanning or
clicking the QR codes.



ERAD-E-SL

Cooling only			ERAD-E-SL	120	140	160	190	210	240	300	350	410	460							
Cooling capacity	Nom.	kW	116	137	159	187	209	243	298	352	409	462								
Power input	Cooling Nom.	kW	42.4	52.5	57.7	66.3	73.9	78.1	91.9	122	150	167								
Capacity control	Method		Stepless																	
	Minimum capacity	%	25.0																	
EER			2.74	2.61	2.75	2.83		3.11	3.24	2.88	2.73	2.76								
Dimensions	Unit	Height	mm	2,273						2,223										
		Width	mm	1,292						2,236										
		Length	mm	2,165	3,065		3,965			3,070										
Weight	Unit	kg	1,684	1,841		2,036			2,081		2,789									
		Operation weight	kg	1,717	1,881					2,886										
Air heat exchanger	Type		High efficiency fin and tube type with integral subcooler																	
Compressor	Type		Single screw compressor																	
	Quantity		1																	
Fan	Type		Direct propeller																	
	Air flow rate	Nom.	I/s	8,373	8,144	12,560	12,216	16,747	16,288	25,120		24,432								
	Quantity			2		3		4		6										
Sound power level	Speed	Cooling Nom.	rpm	700																
	Cooling	Nom.	dBA	89.0			90.0			91.0			92.0	93.0						
	Sound pressure level	Cooling Nom.	dBA	71.0						73.0			74.0							
Operation range	Saturated suction temp	°C		-9~12																
	Condenser inlet temp	°C		-18~48																
Refrigerant	Type / GWP			R-134a / 1,430																
	Circuits	Quantity		1																
Piping connections			76mm											139.7mm						
Unit	Evaporator water inlet/outlet (OD)																			
	Maximum starting current	A	151			195			288			330	410							
	Nominal running current (RLA)	Cooling	A	73	90	98	112	125	131	155	204	249	275							
Power supply			Maximum running current	A	83	100	115	128	151	158	189	234	276	290						
Phase/Frequency/Voltage			Hz/V	3~/50/400																



EW(W)(H)(L)T~Q-A

Modular Water to Water Chiller and Heat Pump
Infinite combinations for maximum flexibility

EW(W)(H)(L)T~Q-A at a glance

For cooling and heating application

- › R32 refrigerant
- › Real modular design
- › Heat pump with inversion on water side
- › Heat pump with inversion on refrigerant side
- › Condenserless



Standard sound version

Suitable for indoor installation

R-32
BLUEVOLUTION



Reduced sound version


Suitable for indoor and outdoor installation

Why choose EW(W)(H)(L)T~Q-A

- › Real redundancy



- › Accessory manifold module customizable with options

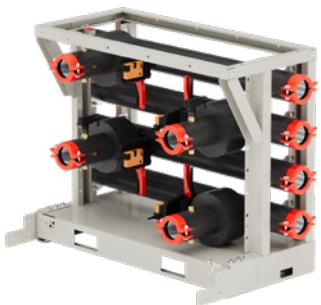

- › On board pump module





Water cooled scroll heat pump



- › One of the most compact units on the market: 600mm x 600mm x 600mm
- › Low energy consumption
- › Low operating sound level
- › Low refrigerant volume
- › Stainless steel plate heat exchanger
- › Extension possible to 183kW
- › Easy installation and maintenance
- › Remote cooling or heating selection
- › Water/water heat pump, with water reversibility
- › Standard integrated: water filter, flow switch, air purge, pressure ports
- › Advanced µC²SE controller for direct connection to a Modbus based BMS or to a remote user interface



More details and final information can be found by scanning or clicking the QR codes.



EWWQ-KC

Cooling & Heating only			EWWQ-KC	014	025	033	049	064
SEER				4.02	4.23	3.63	4.48	3.88
Space heating	Average climate water outlet 55°C	General	SCOP	3.64	3.63	3.71	3.58	3.87
	Average climate water outlet 35°C	General	SCOP	4.76	4.73	4.52	4.87	4.91
Cooling capacity	Nom.	kW	12.09/13.25	19.87/23.89	28.90/30.47	39.35/47.15	57.84/61.00	
Heating capacity	Nom.	kW	14.98	27.30	34.74	54.13	69.51	
Power input	Cooling Nom.	kW	3.20/3.74	5.70/6.11	7.30/8.43	11.4/12.03	14.6/16.41	
	Heating Nom.	kW	3.90	7.10	8.70	14.4	17.5	
Capacity control	Method					Fixed		
	Minimum capacity	%		100			50	
Dimensions	Unit	Height	mm		600			
		Width	mm		600			
Weight		Depth	mm		600		1,200	
	Unit	kg	68.0	132	141	257	265	
Water heat exchanger - evaporator	Operation weight	kg	70/74	129/136	135/145	247/266	258/282	
	Type				Brazed plate			
Water volume	Water volume	l	1.47	1.96	2.74	4.47	5.88	
	Water flow rate	Cooling Nom. l/s	0.63	1.14	1.45	2.25	2.91	
Water drop	Heating Nom. l/s		0.88	1.6	2.07	3.2	4.13	
	Water pressure drop	Cooling Nom. kPa	9.71/11.7	16.4/28.7	21.3/21.6	20.5/27.6	34.8/44.8	
Compressor	Heating Nom. kPa		23.70	60.20	59.60	56.70	94.60	
	Type				Scroll compressor			
Sound power level	Quantity			1		2		
	Cooling Nom.	dBA	69	76	72	79		
Sound pressure level	Cooling Nom.	dBA	55.2	62.1	57.6	64.6		
	Operation range	Evaporator Cooling Min.~Max. °CDB		-10~20				
Refrigerant	Condenser Heating Min.~Max. °CDB			20~55				
	Type/GWP			R-410A/2,088.0				
Piping connections	Charge	kg	0.0/1.30	0.0/1.90	0.0/2.70	0.0/4.60	0.0/6.80	
	Circuits Quantity			1		2		
Space heating	Evaporator water inlet/outlet (OD)			G1"		G1" 1/2		
	Average General SCOP		3.64	3.63	3.71	3.58	3.87	
Space heating	Average General Seasonal space heating eff. class			A++				
	outlet 55°C A Condition (-7°CDB/-8°CWB) Cdh (Degradation heating)			0.9				
Unit	Average General Seasonal space heating eff. class			A+++		A++		A+++
	outlet 35°C							
Power supply	Phase/Frequency/Voltage	Hz/V			3N~/50/400			

Cooling: EW 12°C; LW 7°C; ambient conditions: 35°CDB | Cooling: EW 23°C; LW 18°C; ambient conditions: 35°CDB | Condition: Ta DB/WB 7°C/C - LWC 35°C (DT = 5°C) | Condition: Ta DB/WB 7°C/C - LWC 45°C (DT=5°C) | According to EN14825 | Depends on operation mode, refer to installation manual. | For more details, see operation range drawing



Water cooled multi-scroll chiller reversing on refrigerant side, standard efficiency, standard sound

- › Single refrigerant circuit (2 scroll compressors) with single evaporator
- › Heat pump version with reversibility on refrigerant side available, ideal for geothermal applications
- › Compact design to allow easy indoor installation or retrofit operations
- › Conceived for stacked installation of two single circuit units to reduce the footprint
- › High efficiency and reliable scroll compressor
- › High flexibility for a wide variety of applications
- › Allows sequencing control (up to 4 units) without any external device
- › Stainless steel plate heat exchanger
- › Pump (low 100 kPa and high 200 kPa lift) available for evaporator and condenser
- › MicroTech 4 controller with superior control logic and easy interface



EWHQ-G-SS

MicroTech 4

More details and final information can be found by scanning or clicking the QR codes.



EWHQ-G-SS

Heating & Cooling			EWHQ-G-SS	100	120	130	150	160	190	210	240	270	340	400
Cooling capacity	Nom.	kW	87.3	100.0	111	127	141	160	181	208	232	291	352	
Heating capacity	Nom.	kW	112	128	144	162	179	205	233	266	299	375	454	
Capacity control	Method													Step
	Minimum capacity	%	50.0	43.0	50.0	44.0	50.0	45.0	50.0	43.0	50.0	40.0	50.0	
Power input	Cooling Nom.	kW	22.4	25.3	28.5	32.0	35.6	41.1	46.0	53.3	59.1	73.7	88.4	
	Heating Nom.	kW	27.0	30.9	35.2	39.3	43.6	50.4	56.6	64.7	72.2	90.3	109	
EER			3.90	3.95	3.91	3.96	3.95	3.90	3.93	3.90	3.92	3.95	3.98	
COP			4.15	4.16	4.09	4.12	4.11	4.07	4.11	4.10	4.14	4.16	4.18	
ESEER			4.70	4.84	4.65	4.86	4.80	4.89	4.86	4.83	4.79	4.90	4.83	
IPLV			6.02	6.14	5.66	5.84	5.73	5.84	5.81	5.87	5.71	5.86	5.79	
Dimensions	Unit	HeightxWidthxLength	mm	1,066x928x2,432		1,066x928x2,264			1,066x928x2,432			1,186x928x2,432		
Weight	Unit		kg	519	608	728	770	808	838	880	930	941	1,090	1,203
	Operation weight		kg	558	654	782	830	873	908	995	1,019	1,031	1,202	1,334
Water heat exchanger - evaporator	Type													Plate heat exchanger
	Water flow rate	Cooling Nom.	l/s	4.2	4.8	5.3	6.1	6.7	7.7	8.7	10.0	11.1	13.9	16.9
	Heating Nom.	l/s		4.1	4.7	5.2	5.9	6.5	7.4	8.5	9.6	10.9	13.7	16.6
	Water pressure drop	Cooling Nom.	kPa		44	35	30	29	31	33	31	38	42	43
	Heating Nom.	kPa		42		33	28	27	29	32	29	37	41	42
Water heat exchanger - condenser	Type													Plate heat exchanger
	Water volume	l	6		8		10	12	13	15	17	27	34	
	Water flow rate	Cooling Nom.	l/s	5.2	6.0	6.7	7.7	8.5	9.7	10.9	13.7	13.9	17.4	21.1
	Heating Nom.	l/s		5.4	6.2	7.0	7.8	8.7	9.9	11.2	12.5	14.3	18.0	21.8
	Water pressure drop	Cooling Nom.	kPa		69	55	49	48	51	54	32	39	66	69
	Heating Nom.	kPa		73	59	51	50	53	57	33	42	70	73	
Compressor	Type													Scroll compressor
	Quantity													2
Sound power level	Cooling Nom.	dBA	80.0	83.0	85.0	87.0		88.0		90.0	92.0		93.0	
Sound pressure level	Cooling Nom.	dBA	64.0	67.0	69.0	70.0		72.0		74.0	76.0		77.0	
Operation range	Evaporator Cooling	Min.~Max.	°CDB											-8~15
	Heating	Min.~Max.	°CDB											-8~15
	Condenser Cooling	Min.~Max.	°CDB											25~55
	Heating	Min.~Max.	°CDB											25~55
Refrigerant	Type/GWP													R-410A/2,087.5
	Circuits	Quantity												1
Refrigerant charge	kg/TCO2Eq		9.0/18.8		10.0/20.9		13.0/27.1	11.0/23.0	13.0/27.1	15.0/31.3		19.0/39.7		
Piping connections	Evaporator water inlet/outlet (OD)		1" 1/2				2" 1/2					3"		
	Condenser water inlet/outlet (OD)		1" 1/2				2" 1/2					3"		
Power supply	Phase/Frequency/Voltage	Hz/V												3~/50/400
Unit	Starting current	Max	A	204	255	261	308	316	354	368	466	481	640	677
	Running current	Cooling Nom.	A	43	46	50	56	63	71	78	88	97	123	148
	Max	A	59	66	72	80	88	102	116	131	145	183	221	

Water cooled multi-scroll chiller, standard efficiency, standard sound

- › Single refrigerant circuit (2 scroll compressors) with single evaporator
- › Heat pump version available
- › Compact design to allow easy indoor installation or retrofit operations
- › Conceived for stacked installation of two single circuit units to reduce the footprint
- › High efficiency and reliable scroll compressor
- › High flexibility for a wide variety of applications
- › Allows sequencing control (up to 4 units) without any external device
- › Stainless steel plate heat exchanger
- › Pump (low 100 kPa and high 200 kPa lift) available for evaporator and condenser
- › MicroTech 4 controller with superior control logic and easy interface



More details and final information can be found by scanning or clicking the QR codes.



EWWQ-G-SS

Cooling Only			EWWQ-G-SS	090	100	120	130	150	170	190	210	240	300	360
Space cooling	A Condition 35°C Pdc		kW	93.7	105.6	119	135.9	150	172.1	193.8	220.7	246.1	314.3	370.4
	ηs,c		%	209.08	215.32	233.52	227.68	233.04	233.36	220.32	235.56	231.84	236.64	211.36
SEER				5.427	5.583	6.038	5.892	6.026	6.034	5.708	6.089	5.996	6.116	5.484
Cooling capacity	Nom.		kW	93.7	105.6	119	135.9	150	172.1	193.8	220.7	246.1	314.3	370.4
Power input	Cooling Nom.		kW	21.3	24	26.9	30.5	33.9	38.9	43.8	50.74	56.1	70.2	84
Capacity control	Method													
	Minimum capacity		%	50	43	50	44	50	45	50	43	50	40	50
EER				4.399	4.4	4.424	4.456	4.425	4.424	4.425	4.349	4.387	4.477	4.41
ESEER				5.51	5.52	5.51	5.53	5.51	5.53				5.52	
IPLV				6.71	6.79	6.22	6.36	6.22	6.32	6.3	6.31	6.1	6.28	6.16
Dimensions	Unit	Height	mm							1,066				1,186
		Width	mm							928				
		Length	mm		2,432		2,264				2,432			
Weight	Unit	kg		516	606	728	762	795	832	871	921	934	1,083	1,181
	Operation weight	kg		554.9	652.4	781.6	821.4	859	901.4	945.9	1,009.6	1,023.2	1,194.7	1,311.1
Water heat exchanger - evaporator	Type									Plate heat exchanger				
	Water volume	l		6	8	10	12	13	15	17	27	34		
	Water flow rate Nom.	l/s		4.5	5.07	5.7	6.51	7.18	8.24	9.28	10.57	11.79	15.06	17.74
	Water pressure drop Cooling Nom.	kPa		48.8	49	39.1	33	32.6	34.5	36.7	33.8	41.8		46.8
Water heat exchanger - condenser	Type									Plate heat exchanger				
	Water volume	l		6	8	10	12	13	15	17	27	34		
	Water flow rate Nom.	l/s		5.52	6.23	7.05	8.04	8.87	10.17	11.43	13.02	14.53	18.46	21.81
	Water pressure drop Cooling Nom.	kPa		72	73	60	50	52	56	46	57	69	71	
Compressor	Type									Driven vapour compression				
	Quantity									2				
Sound power level	Cooling Nom.	dBA		80.0	83.0	85.0	87.0		88.0		90.0	92.0		93.0
Sound pressure level	Cooling Nom.	dBA		64.0	67.0	69.0	70.0		72.0		74.0	76.0		77.0
Operation range	Evaporator Cooling Min.-Max.	°CDB								-10~15				
	Heating Min.-Max.	°CDB								-10~15				
	Condenser Cooling Min.-Max.	°CDB								25~55				
	Heating Min.-Max.	°CDB								25~55				
Refrigerant	Type/GWP									R-410A/2,087.5				
	Charge	kg		10		11		12		15	16	17	19	20
	Circuits	Quantity								1				
Refrigerant charge	TCO2Eq			20.88		22.96		25.05		31.31	33.40	35.49	39.66	41.75
Piping connections	Evaporator water inlet/outlet (OD)			1" 1/2				2" 1/2					3"	
	Condenser water inlet/outlet (OD)			1" 1/2				2" 1/2					3"	
Unit	Starting current Max	A		204	255	261	308	316	354	368	466	481	640	677
	Running current Max	A		42	45	48	54	61	68	76	86	95	118	143
	Power supply Phase/Frequency/Voltage	Hz/V							3~/50/400				183	221

Water cooled multi-scroll chiller, standard efficiency, standard sound

- › Dual refrigerant circuit (4 scroll compressors) with single evaporator
- › Heat pump version available
- › Compact design to allow easy indoor installation or retrofit operations
- › High efficiency and reliable scroll compressor
- › Stainless steel plate heat exchanger
- › High flexibility for a wide variety of applications
- › Allows sequencing control (up to 4 units) without any external device
- › Pump (low 100 kPa and high 200 kPa lift) available for evaporator and condenser
- › MicroTech 4 controller with superior control logic and easy interface



More details and final information can be found by scanning or clicking the QR codes.



EWWQ-L-SS

Cooling only/Heating only			EWWQ-L-SS	180	205	230	260	290	330	380
Space cooling	A Condition 35°C Pdc	kW	187.4	215.1	244.3	272.6	303.2	344.5	386.8	
	$\eta_{s,c}$	%	211.72	222.72	232.76	230.32	236.76	233.32	224.84	
SEER			5.493	5.768	6.019	5.958	6.119	6.033	5.821	
Cooling capacity	Nom.	kW	187.4	215.1	244.3	272.6	303.2	344.5	386.8	
Power input	Cooling Nom.	kW	41.7	47.3	53.1	60.2	67.1	77.1	87	
Capacity control	Method					Fixed				
	Minimum capacity	%	25	21	25	22	25	23	25	
EER			4.494	4.548	4.601	4.528	4.519	4.468	4.446	
ESEER				5.54		5.52	5.53	5.54	5.53	5.54
IPLV			6.77	6.84	6.35	6.38	6.31	6.32	6.36	
Dimensions	Unit	Height	mm			1,970				
		Width	mm			928				
		Length	mm			2,801				
Weight	Unit	kg	877	1,062	1,285	1,347	1,439	1,498	1,559	
	Operation weight	kg	957	1,156	1,401	1,469	1,575	1,641	1,723	
Water heat exchanger - evaporator	Type				Plate heat exchanger					
	Water volume	l	35	41	53		65		76	
	Water flow rate Nom.	l/s	8.97	10.29	11.69	13.04	14.5	16.48	18.51	
	Water Cooling Nom. pressure drop	kPa	28	27.6	22.6	28	25.1	32.2	31.9	
Water heat exchanger - condenser	Type			Plate heat exchanger						
	Water volume	l	19	22	29		35		41	
	Water flow rate Nom.	l/s	11.02	12.66	14.4	16.12	17.9	20.38	22.8	
	Water Cooling Nom. pressure drop	kPa	72	73	61	49	50	51	55	
Compressor	Type			Driven vapour compression						
	Quantity			4						
Sound power level	Cooling Nom.	dBA	83.0	86.0	88.0	90.0		91.0		
Sound pressure level	Cooling Nom.	dBA	65.0	68.0	70.0	72.0		74.0		73.0
Operation range	Evaporator Cooling Min.~Max.	°CDB			-10~15					
	Heating Min.~Max.	°CDB			-10~15					
	Condenser Cooling Min.~Max.	°CDB			25~55					
	Heating Min.~Max.	°CDB			25~55					
Refrigerant	Type/GWP			R-410A/2,087.5						
	Charge	kg	20		22		24		30	
	Circuits	Quantity			2					
Refrigerant charge	kg/TCO2Eq		10.0/20.9		11.0/23.0		12.0/25.1		15.0/31.3	
Piping connections	Evaporator water inlet/outlet (OD)				3"					
	Condenser water inlet/outlet (OD)		1" 1/2			2" 1/2				
Unit	Starting Max current	A	263	320	333	388	403	456	484	
	Running Cooling Nom. current	A	83	89	96	109	121	137	151	
	Max current	A	118	131	144	160	175	205	232	
Power supply	Phase/Frequency/Voltage	Hz/V			3~/50/400					

performances according to CSS software 10.27

Water to water screw heat pump, standard efficiency, standard sound

- › Compact design to allow easy indoor installation or retrofit operations
- › Daikin semi-hermetic single screw stepless compressor
- › High energy efficiency both at full and part load conditions
- › Chilled water temperatures down to -10°C on standard unit
- › Optimised for use with R-134a
- › MicroTech 4 controller with superior control logic and easy interface



More details and final information can be found by scanning or clicking the QR codes.



EWWD-J-SS

Cooling & Heating			EWWD-J-SS		120	140	150	180	210	250	280
Space heating	Average climate water outlet 55°C	General	SCOP		4.03	4.11	4.16	4.17	4.17	4.23	3.83
Cooling capacity	Nom.	kW		119.7	145.7	154.3	177.3	207.3	255.3	284.1	
Heating capacity	Nom.	kW		144.2	175.4	189.8	217.8	252.2	308.4	347.4	
Power input	Cooling Nom.	kW		28.0	34.0	39.5	45.3	50.4	59.9	70.0	
Capacity control	Method						Stepless				
	Minimum capacity	%					25.0				
EER				4.28	4.28	3.91	3.92	4.11	4.26	4.06	
COP					5.20		4.84	4.85	5.04	5.17	4.98
IPLV				5.18		5.06	5.05	5.16	5.70	4.88	
Dimensions	Unit	Height	mm				1,020				
		Width	mm				913				
		Length	mm				2,684				
Weight	Unit	kg		1,177	1,233	1,334	1,366	1,416	1,600	1,607	
	Operation weight	kg		1,211	1,276	1,378	1,415	1,473	1,663	1,675	
Water heat exchanger - evaporator	Type						Plate heat exchanger				
	Water volume	l		14	18	14	17	20		26	
	Water flow rate Cooling Nom.	l/s		5.7	7.0	7.4	8.5	9.9	12.2	13.6	
	Water flow rate Heating Nom.	l/s		9.3	11.3	12	13.8	16.1	19.8	22.1	
	Water pressure drop Cooling Nom.	kPa		15	14	43	40	35	28	34	
	Water pressure drop Heating Nom.	kPa		36	34	103	96	85	68	82	
Water heat exchanger - condenser	Type						Single pass shell and tube				
	Water volume	l			20		23	25	29	32	
	Water flow rate Cooling Nom.	l/s		7.1	8.64		9.32	10.7	12.4	15.2	17.0
	Water flow rate Heating Nom.	l/s		6.93	8.44		9.13	10.5	12.1	14.8	16.7
	Water pressure drop Cooling Nom.	kPa		20	13		11	15	17	27	
	Water pressure drop Heating Nom.	kPa		19	12		11	15	16	26	
Compressor	Type						Single screw compressor				
	Quantity						1				
Sound power level	Cooling Nom.	dBA					89				
Sound pressure level	Cooling Nom.	dBA					79				
Operation range	Evaporator Cooling Min.~Max.	°CDB					-10~15				
	Condenser Cooling Min.~Max.	°CDB					23~60				
Refrigerant	Type/GWP						R-134a/1,430				
	Circuits	Quantity					1				
Refrigerant charge	Per circuit	kg/TCO2Eq	18.0/25.7	35.0/50.1	34.0/48.6		37.0/52.9		38.0/54.3		
Piping connections		mm					76.2				
Piping connections	Condenser water inlet/outlet (OD)		2" 1/2	4"							
Unit	Starting current	Max	A	153			197		290		
	Running current	Cooling Nom.	A	48	57	67	74	83	97	109	
	Running current	Max	A	85	103	114	130	154	178	201	
Power supply	Phase/Frequency/Voltage	Hz/V					3~/50/400				


performances according to CSS software 10.34

Fluid: Water; Fouling factor = 0 m²°C/W

Cooling performances: evaporator 12.0/7.0°C, condenser 30.0/35.0°C; Heating performances (Low temperature application): evaporator 10.0/7.0°C, condenser 30.0/35.0°C.

Water to water screw heat pump, standard efficiency, standard sound

- › HFO R-1234ze(E) Refrigerant with Ozone Depletion Potential equal to zero and extremely low Global Warming Potential
- › Daikin semi-hermetic single screw compressor
- › Direct expansion plate to plate evaporator
- › Shell and tube condenser
- › Silver efficiency and standard sound
- › Upgrade to new MicroTech 4 controller

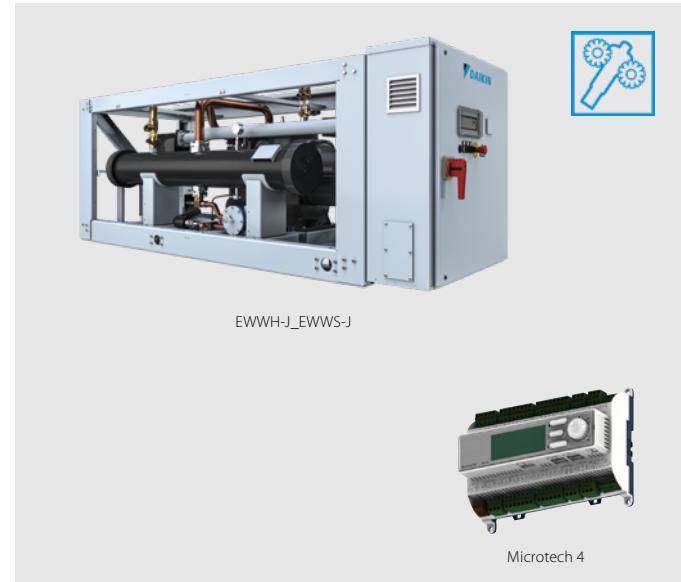

More details and final information can be found by scanning or clicking the QR codes.



EWWH-J-SS

	EWWH-J-SS			090	110	120	130	150	180	200
Space heating	Average climate water outlet 55°C	General	SCOP	3.91	3.92	3.78	3.77	3.80	3.90	3.84
Cooling capacity	Nom.	kW	88.77	107.1	115.1	133.5	150.1	181.6	200.6	
Heating capacity	Nom.	kW	107.2	129.2	140.9	162.3	182.2	220.5	245	
Power input	Cooling Nom.	kW	30	36.3	41.7	47.8	54.2	65.7	74.4	
Capacity control	Method			Stepless						
	Minimum capacity	%		25						
EER				3.85	3.75	3.72	3.78	3.82	3.67	3.66
COP				4.69	4.57	4.52	4.59	4.67	4.46	4.46
IPLV				4.1	4.11	4.09	4.11	4.12	4.64	4.59
Dimensions	Unit	Height	mm				1,020			
		Width	mm				913			
		Length	mm				2,684			
Weight	Unit	kg	1,177	1,233	1,334	1,366	1,416	1,600	1,607	
	Operation weight	kg	1,211	1,276	1,378	1,415	1,473	1,663	1,675	
Water heat exchanger - evaporator	Type			Plate heat exchanger						
	Water volume	l	14	18	14	17	20		26	
	Water flow rate	Cooling Nom.	l/s	4.24	5.11	5.49	6.37	7.16	8.66	9.57
	Water flow rate	Heating Nom.	l/s	6.8	8.3	8.9	10.2	11.8	13.9	15.4
	Water pressure drop	Cooling Nom.	kPa	10.7	10.9	19.3	19.3	17.8	16.8	20.1
	Water pressure drop	Heating Nom.	kPa	24.9	25.9	45.6	44.9	43.7	39.2	47.4
Water heat exchanger - condenser	Type			Single pass shell and tube						
	Water volume	l	20	20	23	25		29		32
	Water flow rate	Cooling Nom.	l/s	5.18	6.31	6.79	7.84	9.1	10.7	11.9
	Water flow rate	Heating Nom.	l/s	6.77	8.27	8.86	10.2	11.8	13.9	15.4
	Water pressure drop	Cooling Nom.	kPa	9.1	9.7	8.7	9.1	9.3	12.3	12.1
	Water pressure drop	Heating Nom.	kPa	24.9	25.9	45.6	44.9	43.7	39.2	47.4
Compressor	Type			Single screw compressor						
	Quantity			1						
Sound power level	Cooling Nom.	dBA					89			
Sound pressure level	Cooling Nom.	dBA					79			
Refrigerant	Type			R-1234(ze)						
	Charge	kg	18	35	34		37		38	
	Circuits	Quantity					1			
Piping connections	mm						76.2			
	Condenser water inlet/outlet	inch	2" 1/2				4			
Unit	Starting current	A	153				197		290	
	Running current	Cooling Nom.	A	39	44	55	60	65	76	84
	Running current	Max	A	75	90	100	114	143	158	178
Power supply	Phase/Frequency/Voltage	Hz/V					3~/50/400			


performances according to CSS software 10.34

Fluid: Water; Fouling factor = 0m 2°C/W

Cooling performances: evaporator 12.0/7.0°C, condenser 30.0/35.0°C; Heating performances (Low temperature application): evaporator 10.0/7.0°C, condenser 30.0/35.0°C.

Water to water screw heat pump, standard efficiency, standard sound

- › Refrigerant R-513A
- › Daikin semi-hermetic single screw compressor
- › Direct expansion plate to plate evaporator
- › Shell and tube condenser
- › Silver efficiency and standard sound
- › Upgrade to new MicroTech 4 controller

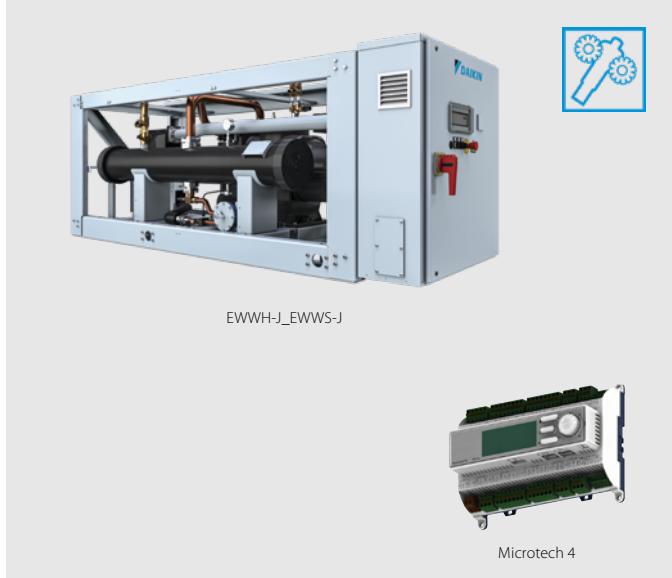

More details and final information
can be found by scanning or
clicking the QR codes.



EWWS-J-SS

			EWWS-J-SS	120	140	150	180	210	240	270
Space heating	Average climate water outlet 55°C	General	SCOP	3.63	3.54	3.56	3.59	3.62	3.54	3.58
Cooling capacity	Nom.	kW	115.2	136.3	154.7	180.6	207.3	241	272.2	
Heating capacity	Nom.	kW	141.7	167.5	191.3	223	256.9	297.	338.2	
Power input	Cooling Nom.	kW	30	36.3	41.7	47.8	54.2	65.7	74.4	
Capacity control	Method					Stepless				
	Minimum capacity	%				25				
EER			3.85	3.75	3.72	3.78	3.82	3.67	3.66	
COP			4.69	4.57	4.52	4.59	4.67		4.46	
IPLV			4.1	4.11	4.09	4.11	4.12	4.64	4.59	
Dimensions	Unit	Height	mm			1,020				
		Width	mm			913				
		Length	mm			2,684				
Weight	Unit	kg	1,177	1,233	1,334	1,366	1,416	1,600	1,607	
	Operation weight	kg	1,211	1,276	1,378	1,415	1,473	1,663	1,675	
Water heat exchanger - evaporator	Type					Plate heat exchanger				
	Water volume	l	14	18	14	17	20		26	
	Water flow rate	Cooling Nom. l/s	5.5	6.5	7.38	8.62	9.89	11.5	13	
	Water flow rate	Heating Nom. l/s	8.8	10.8	12.1	13.8	15.5	19	21.1	
	Water pressure drop	Cooling Nom. kPa	17.1	16.8	32.8	33.4	31.8	27.9	34.8	
	Water pressure drop	Heating Nom. kPa	40.1	41.7	79.4	78.1	71.5	68.9	83.3	
Water heat exchanger - condenser	Type					Single pass shell and tube				
	Water volume	l	20	20	23	25		29	32	
	Water flow rate	Cooling Nom. l/s	6.87	8.38	9.39	10.8	12.1	14.8	16.5	
	Water flow rate	Heating Nom. l/s	6.72	8.2	9.2	10.6	11.9	14.5	16.2	
	Water pressure drop	Cooling Nom. kPa	15	16.1	15.4	15.9	15.4	22	21.6	
	Water pressure drop	Heating Nom. kPa	14.4	15.5	14.8	15.3	14.8	21.2	20.8	
Compressor	Type					Single screw compressor				
	Quantity					1				
Sound power level	Cooling Nom.	dBA				89				
Sound pressure level	Cooling Nom.	dBA				79				
Refrigerant	Type					R-513A				
	Charge	kg	18	35	34		37		38	
	Circuits	Quantity				1				
Piping connections		mm				76.2				
Piping connections	Condenser water inlet/outlet	inch	2" 1/2				4			
Unit	Starting current	A	154			198			291	
	Running current	A	50	60	70	78	87	104	117	
	Max current	A	81	96	108	122	141	164	185	
Power supply	Phase/Frequency/Voltage	Hz/V				3~/50 /400				

performances according to CSS software 10.34

Fluid: Water; Fouling factor = 0m 2°C/W

Cooling performances: evaporator 12.0/7.0°C, condenser 30.0/35.0°C; Heating performances (Low temperature application): evaporator 10.0/7.0°C, condenser 30.0/35.0°C.



The highest peak in chiller technology

The VZ chiller series were developed and manufactured to answer the growing market demands on high efficient chiller series. Thanks to the continuous evolution in components' technology, we are the first to reach the highest peak in chiller efficiency and technology.

EWW(H)(D)(S)-VZ at a glance

Single compressor



440kW - 1,050kW with R134a or R513A
330kW - 790kW with R1234ze

Full inverter water cooled chiller



Dual compressor & dual circuit unit



1,170kW - 2,070kW with R134a or R513A
865kW - 1,540kW with R1234ze

of everything:
2 compressors,
2 expansion valves,
2 condensers,...

New condenser design with integral oil separator

High efficient flooded heat exchangers

Highest efficiency in the market in its category



TOP CLASS EFFICIENCY

Unique Daikin single screw compressor technology



Performance monitoring

With MT4, advanced algorithm implementation in the unit controller are possible, such as the **Performance Monitoring** (Option 186). This sensor-less algorithm calculates the unit cooling capacity by using refrigerant pressure and temperature readings. Electrical power is calculated either from compressor VFD power and fan, or directly measured through optional energy meter. As a standard(*), **no extra-hardware is required**.

(*) For TZ-B units an additional sub-cooling temperature sensor is required.

Why choose EWW(H)(D)(S)-VZ at a glance chiller series?

1 Top class efficiency

Thanks to:

- › New generation Daikin inverter screw compressors
- › New generation high efficiency heat exchangers
- › Variable volume ratio technology
- › Optimized refrigerant circuit design



2 Compact unit: 40% footprint reduction

Thanks to:

- › New single pass condenser technology
- › New integrated oil separator technology
- › Optional knock down panel which reduces the unit width

3 Application flexibility: widest operating envelope in its range

4 Connectivity: Daikin on site cloud platform

5 Future readiness: Choose for today's best solution and be ready for the future!

Supporting tools

Product video



Check on



[www.youtube.com/
DaikinEurope](http://www.youtube.com/DaikinEurope)



Marketing material

All marketing material can be downloaded from the business portal.
Asset finder > Campaign > VZ chiller series



Product profile


Want to know more about this product?

Have a look at our website and download the product profile:

www.daikineurope.com/vzchillerseries

Water cooled screw inverter chiller, standard efficiency, standard sound

- › Optimized energy efficiency both at full and part load conditions
- › Compact footprint through stacked heat exchanger lay-out
- › Heat pump version with reversibility on water side (up to 65°C hot water production)
- › Multiple options available: sound proof cabinet, rapid restart, removable electrical panel, etc. to adapt the unit to your specific application and need
- › Thanks to a large operating envelope, the unit is suitable for all possible process and comfort applications
- › High efficient flooded type heat exchanger allowing maximum unit performances
- › One or two truly independent refrigerant circuits for outstanding reliability

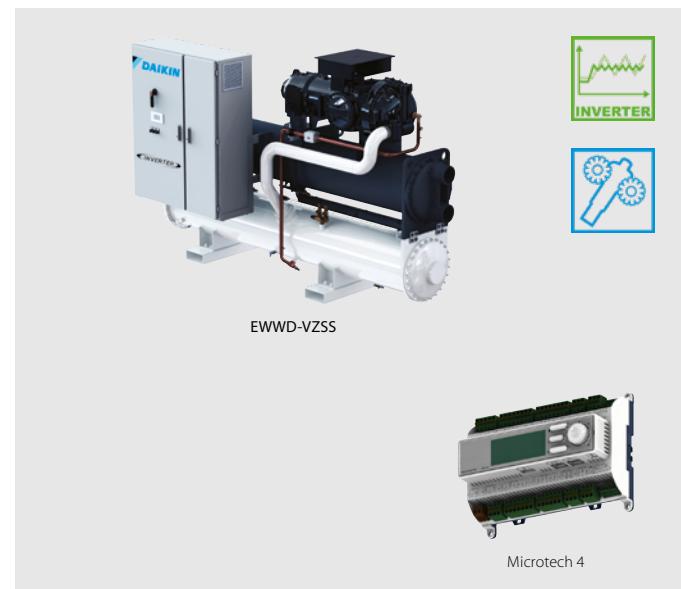

More details and final information can be found by scanning or clicking the QR codes.




EWWD-VZSS

Cooling only/Heating only			EWWD-VZSS	600	700	760	890	C10	C12	C13	C14	C16	C17	C19	C21	
Space cooling	A Condition Pdc (35°C - 27/19)	kW	609.91	704.22	756.52	894.23	1,039.49	1,173.02	1,288.02	1,381.01	1,552.02	1,722.02	1,875.55	2,051.2		
	ηs,c	%		340		337.2	331.6	332	337.2	331.6	331.2	320.8	338.8	322	338.8	
SEER				8.7		8.63	8.49	8.5	8.63	8.49	8.48	8.22	8.67	8.25	8.67	
Cooling capacity	Nom.	kW	610	704	757	894	1,039	1,173	1,288	1,381	1,552	1,722	1,876	2,051		
Power input	Cooling Nom.	kW	110	132	142	162	196	231	252	276	315	339	380	404		
Capacity control	Method														Variable	
	Minimum capacity	%					20								10	
EER				5.5	5.31	5.3	5.52	5.29	5.07	5.11	5	4.93	5.08	4.93	5.08	
IPLV				9.43	9.36	9.4	9.37	9.4	9.52	9.56	9.57	9.36	9.7	9.38	9.65	
Dimensions	Unit	Height	mm		2,123		2,292	2,487					2,350	2,338	2,498	
		Width	mm	1,178		1,179		1,233	1,303	1,484		1,487		1,484	1,580	1,627
		Length	mm	3,722		3,750		3,690	3,822			4,792			4,508	4,750
Weight	Unit	kg	2,892	2,928	2,941	3,451	4,237	5,570	5,790	5,820	6,220	6,890	7,260	8,260		
	Operation weight	kg	2,977	3,033	3,053	3,611	4,488	5,980	6,220	6,290	6,690	7,480	7,830	9,070		
Water heat exchanger - evaporator	Type														Flooded shell and tube	
	Water volume	l		88		96	134	156		230		270		320	380	
	Water flow rate Cooling Nom.	l/s	29.2	33.8	36.3	42.9	49.9	56.2	61.7	66.1	74.4	82.5	89.9	98.2		
	Water pressure drop	kPa	79	106	88	98	102	69	84	70	89	78	92	80		
Water heat exchanger - condenser	Type														Shell and tube	
	Water volume	l	81		102		126	217	180		200		270	250	430	
	Water flow rate Cooling Nom.	l/s	35.3	41	44.1	51.9	60.6	69.1	75.8	81.5	91.9	101	111	120		
	Water pressure drop	kPa	31	29	33	29	33	44	39	45	66	42	55	37		
Compressor	Type														Driven vapour compressor	
	Quantity						1								2	
	Sound power level Cooling Nom.	dBA	101		105		107		106		107		108		110	
Operation range	Condenser	Nom.	dBA	82		86		88		87		88		89	90	
	Evaporator	Min.~Max.	°CDB												-12~20	
	Condenser	Min.~Max.	°CDB												19~63	
Refrigerant	Type/GWP														R-134a/1,430	
	Charge	kg	125	120	125	145	180	250	260	270	220	305	290	350		
	Circuits	Quantity				1						2				
Piping connections		mm		139.7		168.3						219.1				
	Condenser water inlet/outlet (OD)				168.3mm		219.1mm		168.3/168.3 mm				219.1/219.1 mm			
	Running current	Cooling Nom.	A	171	202	220	249	300	349	379	414	470	508	566	604	
Unit	Running current	Max	A	235	280	301	342	417	470	513	559	621	696	758	834	
Power supply	Phase/Frequency/Voltage	Hz/V							3~/50/400							

performances according to CSS software 10.33

Water cooled screw inverter chiller, high efficiency, standard sound

- High energy efficiency both at full and part load conditions
- Compact footprint through stacked heat exchanger lay-out
- Heat pump version with reversibility on water side (up to 65°C hot water production)
- Multiple options available: sound proof cabinet, rapid restart, removable electrical panel, etc. to adapt the unit to your specific application and need
- Thanks to a large operating envelope, the unit is suitable for all possible process and comfort applications
- High efficient flooded type heat exchanger allowing maximum unit performances
- One or two truly independent refrigerant circuits for outstanding reliability

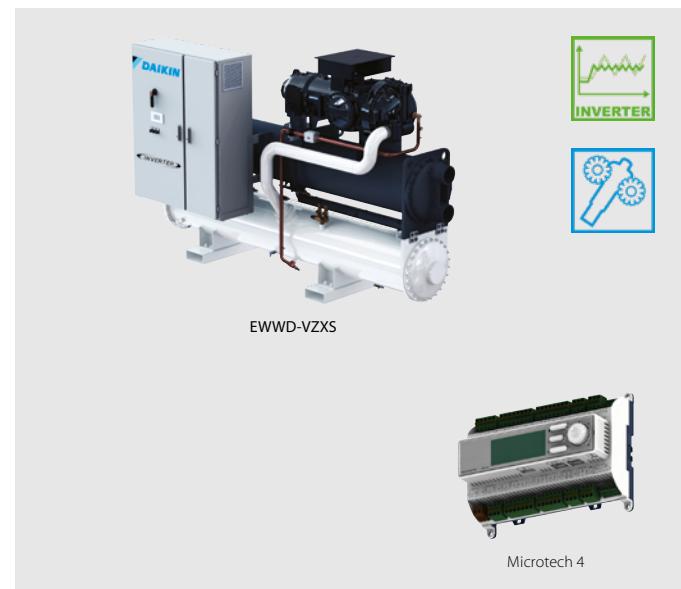

More details and final information can be found by scanning or clicking the QR codes.




EWWD-VZXS

Cooling only/Heating only			EWWD-VZXS															
Space cooling	A Condition Pdc (35°C - 27/19)	kW	448.83	500.51	612.77	713.11	793.52	901.21	1,053.02	1,194.03	1,305.01	1,406.98	1,593.03	1,748.03	1,912.01	2,074.02		
	ηs,c	%	324.8	329.2	347.2	350	345.6	337.6	344.4	347.6	342.4	348	347.2	347.6	337.2	344.4		
SEER			8.32	8.43	8.88	8.95	8.84	8.64	8.81	8.89	8.76	8.9	8.88	8.89	8.63	8.81		
Cooling capacity	Nom.	kW	449	501	613	713	794	901	1,053	1,194	1,305	1,407	1,593	1,748	1,912	2,074		
Power input	Cooling Nom.	kW	81.2	89.7	108	128	146	159	192	221	244	262	296	329	365	394		
Capacity control	Method		Variable															
	Minimum capacity	%	20															
EER			5.53	5.58	5.64	5.54	5.43	5.67	5.46	5.38	5.34	5.36	5.38	5.31	5.23	5.25		
IPLV			9.42	9.59	9.52	9.66	9.64	9.48	9.58	9.66	9.67	9.76	9.74	9.82	9.68	9.7		
Dimensions	Unit	Height	mm	2,135	2,123	2,235		2,487		2,296		2,301	2,350	2,500	2,469	2,493		
		Width	mm	1,178	1,179	1,189		1,303		1,484	1,639	1,579	1,580	1,610	1,704	1,769		
		Length	mm	3,722	3,750	3,690		3,822		4,792		4,508	4,750	4,874				
Weight	Unit	kg	2,968	2,911	3,102	3,470	3,451	4,257	4,552	5,860	6,240	6,520	6,920	7,530	7,790	8,670		
	Operation weight	kg	3,098	3,006	3,274	3,648	3,611	4,518	4,860	6,370	6,760	7,130	7,530	8,300	8,560	9,630		
Water heat exchanger - evaporator	Type		Flooded shell and tube															
	Water volume	l	70	88	136	134		168	199	270		320		380		480		
	Water flow rate Cooling Nom.	l/s	21.5	24	29.3	34.1	38	43.2	50.4	57.1	62.5	67.3	76.3	83.6	91.4	99.2		
	Water pressure drop	Water Cooling Nom. kPa	89	63	59	63	55	67	59	52	62	52	67	58	49	58		
Water heat exchanger - condenser	Type		Shell and tube															
	Water volume	l	81	92	126	145	126	217	241	240	250	290	390	290	480			
	Water flow rate Cooling Nom.	l/s	26.4	29.4	35.3	41.2	46.1	52	61	69.8	76.3	82.2	93.2	102	112	121		
	Water pressure drop	Water Cooling Nom. kPa	31	28	22	20	24	25		28		21	32	27	37	28		
Compressor	Type		Driven vapour compressor															
	Quantity		1															
Sound power level	Cooling Nom.	dBA	97	99	101		105		107		106		107		108	109	110	
Sound pressure level	Cooling Nom.	dBA	78	80	82		86		88		87		88		89		90	
Operation range	Evaporator	Min.~Max. °CDB		-12~20														
	Condenser	Min.~Max. °CDB		19~65														
Refrigerant	Type/GWP		R-134a/1,430															
	Charge	kg	110	125	140	160	200	185	270	260	230	290	290	320	370			
	Circuits Quantity		1															
Piping connections		mm	139.7				168.3				219.1				273			
	Condenser water inlet/outlet (OD)		168.3mm				219.1mm				168.3 / 219.1 mm				219.1 / 219.1 mm			
	Running current	A	126	140	171	201	229	249	299	340	372	400	450	498	554	596		
Unit	Running current	A	172	191	235	280	316	342	417	470	513	559	621	696	758	834		
Power supply	Phase/Frequency/Voltage	Hz/V	3~/50/400															

performances according to CSS software 10.33

Water cooled screw inverter chiller, premium efficiency, standard sound

- › Premium energy efficiency both at full and part load conditions
- › Compact footprint through stacked heat exchanger lay-out
- › Heat pump version with reversibility on water side (up to 65°C hot water production)
- › Multiple options available: sound proof cabinet, rapid restart, removable electrical panel, etc. to adapt the unit to your specific application and need
- › Thanks to a large operating envelope, the unit is suitable for all possible process and comfort applications
- › High efficient flooded type heat exchanger allowing maximum unit performances
- › One or two truly independent refrigerant circuits for outstanding reliability

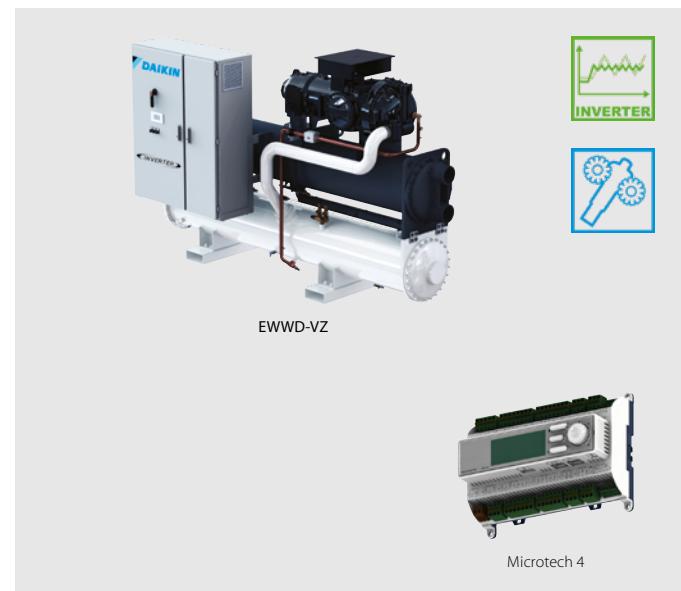

More details and final information can be found by scanning or clicking the QR codes.



EWWD-VZPS

Cooling only/ Heating only		EWWD-VZPS	505	715	910	C12	C16	C18
Space cooling	A Condition Pdc (35°C - 27/19)	kW	505.02	717.71	908.11	1,201.02	1,604.03	1,757.01
	ηs,c	%	339.6	355.2	344.4	353.6	354	350
SEER			8.69	9.08	8.81	9.04	9.05	8.95
Cooling capacity	Nom.	kW	505	718	908	1,201	1,604	1,757
Power input	Cooling Nom.	kW	85.1	124	153	218	291	326
Capacity control	Method				Variable			
	Minimum capacity	%		20			10	
EER			5.93	5.77	5.91	5.49	5.5	5.39
IPLV			9.61	9.68	9.57	9.79	9.82	9.92
Dimensions	Unit	Height	mm	2,108	2,430	2,487	2,302	2,500
		Width	mm	1,179	1,287	1,303	1,579	1,610
		Length	mm	3,750	3,822	4,508	4,750	4,874
Weight	Unit	kg	3,247	4,082	4,346	6,310	7,530	8,250
	Operation weight	kg	3,375	4,349	4,660	6,900	8,300	9,200
Water heat exchanger - evaporator	Type				Flooded shell and tube			
	Water volume	l	96	168	199	320	380	480
	Water flow rate Cooling Nom.	l/s	24.2	34.3	43.4	57.4	76.7	84
	Water Cooling Nom. pressure drop	kPa	55	42	44	38	49	41
Water heat exchanger - condenser	Type				Shell and tube			
	Water volume	l	126	217	241	270	390	470
	Water flow rate Cooling Nom.	l/s	29.4	41.3	52.1	69.9	93.4	102
	Water Cooling Nom. pressure drop	kPa	16	17	19	21		28
Compressor	Type				Driven vapour compressor			
	Quantity			1			2	
Sound power level	Cooling Nom.	dBA	99	105		106	107	109
Sound pressure level	Cooling Nom.	dBA	80	86		87	88	89
Operation range	Evaporator	Min.~Max.	°CDB		-12~20			
	Condenser	Min.~Max.	°CDB		19~65			
Refrigerant	Type/GWP				R-134a/1,430			
	Charge	kg	120	195	185	305	320	350
	Circuits Quantity			1		2		
Piping connections		mm	139.7		219.1			273
	Condenser water inlet/outlet (OD)			219.1mm		219.1/219.1 mm		
	Running Cooling Nom. current	A	138	200	247	338	447	497
Unit	Running Max current	A	191	280	342	470	621	696
Power supply	Phase/Frequency/Voltage	Hz/V			3~/50/400			

performances according to CSS software 10.33



Water cooled screw inverter chiller, standard efficiency, standard sound

- › Optimized energy efficiency both at full and part load conditions
- › Compact footprint through stacked heat exchanger lay-out
- › Heat pump version with reversibility on water side (up to 75°C hot water production)
- › Multiple options available: sound proof cabinet, rapid restart, removable electrical panel, etc. to adapt the unit to your specific application and need
- › Thanks to a large operating envelope, the unit is suitable for all possible process and comfort applications
- › High efficient flooded type heat exchanger allowing maximum unit performances
- › One or two truly independent refrigerant circuits for outstanding reliability



More details and final information can be found by scanning or clicking the QR codes.




EWWH-VZSS

Cooling only/Heating only			EWWH-VZSS	445	515	550	660	770	860	940	C10	C12	C13	C14	C15			
Space cooling			A Condition Pdc (35°C - 27/19)	kW	443	512	548.51	657.51	767.8	865.2	940.6	1,011.7	1,142.46	1,271.38	1,396.11	1,524.83		
$\eta_{s,c}$			%	336.4	338.4	336.8	348.4	345.2	318.4	327.2	339.6	331.2	340	345.6	353.2			
SEER					8.61	8.66	8.62	8.91	8.83	8.16	8.38	8.69	8.48	8.7	8.84	9.03		
Cooling capacity			Nom.	kW	443	512	549	658	768	865	941	1,012	1,142	1,271	1,396	1,525		
Power input			Cooling Nom.	kW	82.8	98.1	107	123	149	172	188	205	235	254	282	302		
Capacity control			Method							Variable								
			Minimum capacity	%						10								
EER					5.35	5.22	5.15	5.34	5.14	5.02	5	4.93	4.87	5.01	4.95	5.04		
IPLV					9.25	9.24	9.48	9.32	8.94	9.08	9.13	9.14	9.3	9.13	9.34			
Dimensions	Unit	Height		mm	2,123		2,292	2,487	2,296		2,350	2,338	2,498					
		Width		mm	1,178		1,179	1,233	1,303	1,484	1,487	1,484	1,580	1,627	1,753			
		Length		mm	3,722		3,750	3,690	3,822	4,792		4,508		4,750				
Weight	Unit	kg		kg	2,892	2,928	2,941	3,451	4,237	5,570	5,790	5,820	6,220	6,890	7,260	8,260		
		Operation weight		kg	2,977	3,033	3,053	3,611	4,488	5,980	6,220	6,290	6,690	7,480	7,830	9,070		
Water heat exchanger - evaporator	Type				Flooded shell and tube													
	Water volume			l	88		96	134	156	230	270		320	380				
	Water flow rate Cooling Nom.			l/s	21.2	24.5	26.2	31.5	36.8	41.4	45	48.4	54.6	60.8	66.8	72.9		
	Water Cooling Nom. pressure drop			kPa	46	61	52	59	64	39	46	39	50	44	53	45		
Water heat exchanger - condenser	Type				Shell and tube													
	Water volume			l	81	102		126	217	180	200		270	250	430			
	Water flow rate Cooling Nom.			l/s	25.5	29.6	31.8	38.1	44.8	50.3	54.8	59	66.8	74	81.4	88.7		
	Water Cooling Nom. pressure drop			kPa	19	17	20	19	17	25	22	25	38	25	32	18		
Compressor			Type		Driven vapour compression													
Quantity					2													
Sound power level	Cooling Nom.		dBA	101	105		107	106		107	108		110					
Sound pressure level	Cooling Nom.		dBA	82	86		88	87		88	89		90					
Refrigerant	Type/GWP				R-1234(ze)/7													
	Charge			kg	125	124	105	145	190	210	230	250	220	280	320			
	Circuits Quantity				1		2		2		2		2					
Piping connections			mm	139.7		168.3	219.1		219.1		219.1/219.1 mm		219.1/219.1 mm					
Condenser water inlet/outlet (OD)				168.3mm		219.1mm		168.3/168.3 mm		219.1/219.1 mm		219.1/219.1 mm						
Unit	Running current	Cooling Max	Nom.	A	131.0	153.0	167.0	188.0	227.0	264.0	287.0	312.0	353.0	385.0	426.0	458.0		
Power supply	Phase/Frequency/Voltage			Hz/V	3~/50/400													

performances according to CSS software 10.33

Water cooled screw inverter chiller, high efficiency, standard sound

- High energy efficiency both at full and part load conditions
- Compact footprint through stacked heat exchanger lay-out
- Heat pump version with reversibility on water side (up to 75°C hot water production)
- Multiple options available: sound proof cabinet, rapid restart, removable electrical panel, etc. to adapt the unit to your specific application and need
- Thanks to a large operating envelope, the unit is suitable for all possible process and comfort applications
- High efficient flooded type heat exchanger allowing maximum unit performances
- One or two truly independent refrigerant circuits for outstanding reliability

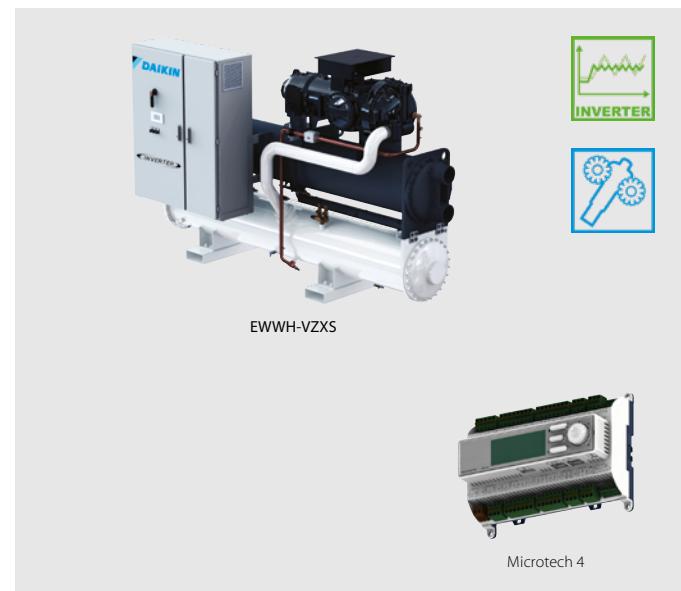

More details and final information can be found by scanning or clicking the QR codes.




EWWH-VZXS

Cooling only/Heating only		EWWH-VZXS																
Space cooling	A Condition Pdc (35°C - 27/19)	kW	329.01	364.52	448	520.61	579.19	665.41	788.2	877.36	952.01	1,028.81	1,169.3	1,288.48	1,421.75	1,540.03		
	ηs,c	%	296	307.2	343.6	347.2	343.2	356	354.4	326	334			346.8		358	356.8	
SEER			7.6	7.88	8.79	8.88	8.78	9.1	9.06	8.35	8.55			8.87		9.15	9.12	
Cooling capacity	Nom.	kW	329	365	448	521	579	665	788	877	952	1,029	1,169	1,288	1,422	1,540		
Power input	Cooling Nom.	kW	60.5	66.6	81	96	109	121	147	168	185	198	224	248	276	298		
Capacity control	Method		Variable															
	Minimum capacity	%	20															10
EER			5.44	5.48	5.53	5.42	5.29	5.49	5.37	5.23	5.16	5.19	5.22	5.19		5.16		
IPLV			8.51	8.79	9.46	9.51	9.47	9.63	9.65	9.19	9.27	9.46	9.37	9.52	9.23	9.5		
Dimensions	Unit	Height	mm	2,135	2,123	2,235		2,487		2,296		2,301	2,350	2,500	2,469	2,493		
		Width	mm	1,178	1,179	1,189		1,303		1,484	1,639	1,579	1,580	1,610	1,704	1,769		
		Length	mm	3,722	3,750	3,690		3,822		4,792		4,508		4,750		4,874		
Weight	Unit	kg	2,968	2,911	3,102	3,470	3,451	4,257	4,552	5,860	6,240	6,520	6,920	7,530	7,790	8,670		
	Operation weight	kg	3,098	3,006	3,274	3,648	3,611	4,518	4,860	6,370	6,760	7,130	7,530	8,300	8,560	9,630		
Water heat exchanger - evaporator	Type		Flooded shell and tube															
	Water volume	l	70	88	136	134		168	199	270		320		380		480		
	Water flow rate Cooling Nom.	l/s	15.8	17.5	21.4	24.9	27.7	31.8	37.7	41.9	45.5	49.1	55.9	61.6	67.9	73.6		
	Water pressure drop	kPa	54	38	35	37	31	39	36	29	34	28	37	32	28	33		
Water heat exchanger - condenser	Water volume	l	81	92	126	145	126	217	241	240	250	290		390	290	480		
	Water flow rate Cooling Nom.	l/s	18.9	20.9	25.7	30	33.5	38.4	45.7	50.7	55.1	59.6	67.6	74.6	82.3	89.3		
	Water pressure drop	kPa	19	16	13	12	15	13		16		13	19	16	23	16		
Compressor	Type		Driven vapour compression															
	Quantity		1															2
Sound power level	Cooling Nom.	dBA	97	99	101		105		107		106		107		108	109	110	
Sound pressure level	Cooling Nom.	dBA	78	80	82		86		88		87		88		89		90	
Refrigerant	Type/GWP		R-1234(ze)/7															
	Charge	kg	124	110	125	140	130	200	185	250	220	270	255	305	320	346		
	Circuits Quantity		1															2
Piping connections		mm	139.7			168.3			219.1			273						
Condenser water inlet/outlet (OD)			168.3mm			219.1mm			168.3/ 219.1mm			219.1/219.1 mm						
Unit	Running current	A	96.0	106.0	129.0	151.0	173.0	187.0	226.0	259.0	284.0	304.0	341.0	379.0	421.0	454.0		
Power supply	Phase/Frequency/Voltage	Hz/V	3~/50/400															

performances according to CSS software 10.33

Water cooled screw inverter chiller, premium efficiency, standard sound

- › Premium energy efficiency both at full and part load conditions
- › Compact footprint through stacked heat exchanger lay-out
- › Heat pump version with reversibility on water side (up to 75°C hot water production)
- › Multiple options available: sound proof cabinet, rapid restart, removable electrical panel, etc. to adapt the unit to your specific application and need
- › Thanks to a large operating envelope, the unit is suitable for all possible process and comfort applications
- › High efficient flooded type heat exchanger allowing maximum unit performances
- › One or two truly independent refrigerant circuits for outstanding reliability

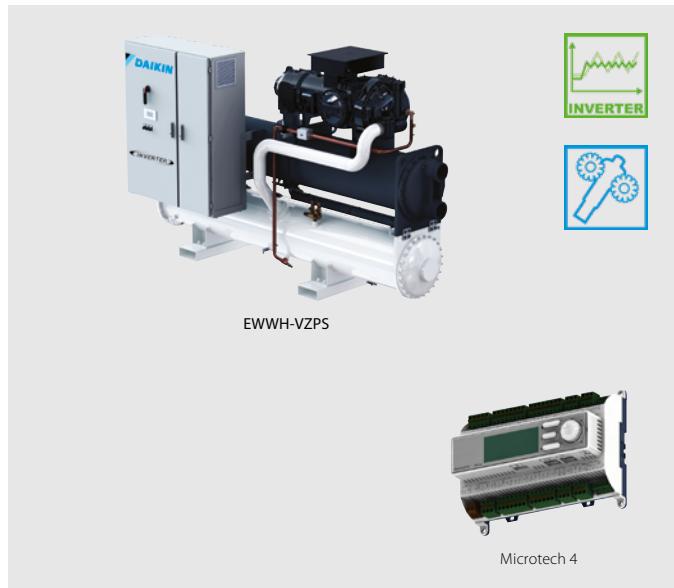

More details and final information can be found by scanning or clicking the QR codes.



EWWH-VZPS

Cooling only/Heating only		EWWH-VZPS	370	530	680	880	C12	C13
Space cooling	A Condition Pdc (35°C - 27/19)	kW	369.3	525.1	677.11	883.79	1,180.43	1,295.36
	ηs,c	%	316.8	352.8	363.6	334.4	352.4	348.8
SEER			8.12	9.02	9.29	8.56	9.01	8.92
Cooling capacity	Nom.	kW	369	525	677	884	1,180	1,295
Power input	Cooling Nom.	kW	64.7	94.9	119	166	221	247
Capacity control	Method				Variable			
	Minimum capacity	%		20			10	
EER			5.71	5.53	5.67	5.34	5.35	5.25
IPLV			9.13	9.68	9.96	9.37	9.56	9.61
Dimensions	Unit	Height	mm	2,108	2,430	2,487	2,302	2,500
		Width	mm	1,179	1,287	1,303	1,579	1,610
		Length	mm	3,750	3,822	4,508	4,750	4,874
Weight	Unit	kg	3,247	4,082	4,346	6,310	7,530	8,250
	Operation weight	kg	3,375	4,349	4,660	6,900	8,300	9,200
Water heat exchanger - evaporator	Type				Flooded shell and tube			
	Water volume	l	96	168	199	320	380	480
	Water flow rate Cooling Nom.	l/s	17.7	25.1	32.3	42.2	56.4	61.9
	Water Cooling Nom. pressure drop	kPa	32	25	27	20	26	23
Water heat exchanger - condenser	Type				Shell and tube			
	Water volume	l	126	217	241	270	390	470
	Water flow rate Cooling Nom.	l/s	21.1	30.1	38.9	50.9	68	74.9
	Water Cooling Nom. pressure drop	kPa		9	12	13	12	16
Compressor	Type				Driven vapour compression			
	Quantity			1			2	
Sound power level	Cooling Nom.	dBA	99	105	106	107	109	
Sound pressure level	Cooling Nom.	dBA	80	86	87	88	89	
Refrigerant	Type/GWP				R-1234(ze)/7			
	Charge	kg	120	190	185	305	288	350
	Circuits Quantity			1			2	
Piping connections	Condenser water inlet/outlet (OD)	mm	139.7	219.1mm		219.1		273
							219.1/219.1 mm	
Unit	Running current	A	104.0	150.0	185.0	257.0	338.0	378.0
	Cooling Max	A	149	226	268	374	493	549
Power supply	Phase/Frequency/Voltage	Hz/V			3~/50/400			

performances according to CSS software 10.33



Water to water screw inverter chiller, standard efficiency, standard sound

- › Optimized energy efficiency both at full and part load conditions
- › Compact footprint through stacked heat exchanger lay-out
- › Heat pump version with reversibility on water side (up to 60°C hot water production)
- › Multiple options available: sound proof cabinet, rapid restart, removable electrical panel, etc. to adapt the unit to your specific application and need
- › Thanks to a large operating envelope, the unit is suitable for all possible process and comfort applications
- › High efficient flooded type heat exchanger allowing maximum unit performances
- › One or two truly independent refrigerant circuits for outstanding reliability



More details and final information can be found by scanning or clicking the QR codes.



EWWS-VZSS

Cooling only/Heating only			EWWS-VZSS	600	700	740	880	C10	C12	C13	C14	C15	C17	C18	C20	
Space cooling	A Condition Pdc (35°C - 27/19)	kW	599.51	693.51	743.53	879.64	1,020.09	1,148.76	1,263.41	1,351.54	1,514.87	1,689.58	1,831.98	2,013.41		
	ηs,c	%	316	314.4	313.2	320	313.2	321.2	314.8	312	297.6	313.6	304	318.4		
SEER			8.1	8.06	8.03	8.2	8.03	8.23	8.07	8	7.64	8.04	7.8	8.16		
Cooling capacity	Nom.	kW	600	694	744	880	1,020	1,149	1,263	1,352	1,515	1,690	1,832	2,013		
Power input	Cooling Nom.	kW	120.1	143.3	154.7	175.2	212.7	251.8	273.9	301	343	367.4	413.5	437.2		
Capacity control	Method		Variable													
	Minimum capacity	%	20					10								
EER			4.99	4.84	4.81	5.02	4.8	4.56	4.61	4.49	4.42	4.6	4.43	4.61		
IPLV			9.02	9.15		8.84	8.88	9.06	9.31	9.23	8.9	9.18	8.88	9.05		
Dimensions	Unit	Height	mm	2,123			2,292	2,487	2,296			2,350	2,338	2,498		
		Width	mm	1,178			1,233	1,303	1,484	1,487			1,580	1,627	1,753	
		Depth	mm	3,722			3,690	3,822	4,792			4,508			4,750	
Weight	Unit	kg	2,892	2,928	2,941	3,451	4,237	5,570	5,790	5,820	6,220	6,890	7,260	8,260		
	Operation weight	kg	2,977	3,033	3,053	3,611	4,488	5,980	6,220	6,290	6,690	7,480	7,830	9,070		
Water heat exchanger - evaporator	Type		Flooded shell and tube													
	Water volume	l	88		96	134	156	230		270		320		380		
	Water flow rate	l/s	28.7	33.3	35.7	42.2	48.9	55	60.6	64.7	72.6	80.9	87.8	96.4		
	Water pressure drop	kPa	80	108	89	100	103	69	85	70	89	79	92	81		
	Type		Flooded Shell & Tube													
Water heat exchanger - condenser	Water volume	l	81	102		126	217	180	200		270		250	430		
	Water flow rate	l/s	34.5	40.1	43.2	50.6	59.3	67.1	73.7	79.2	89	98.7	107	117		
	Water pressure drop	kPa	31	29	32	29	33	43	38	44	64	41	53	36		
	Type		Driven vapour compressor													
Compressor	Quantity		1				2				3					
	Cooling Nom.	dBA	101	105		107	106		107	108		110	110			
Sound power level	Cooling Nom.	dBA	82	86		88	87		88	89		90	90			
Refrigerant	Type/GWP		R-513A/631													
	Charge	kg	100	110		170	180	250	260	270	290	295	320	350		
	Circuits Quantity		1				2				3					
Piping connections		mm	139.7			168.3	219.1			168.3	219.1			219.1		
Performances according to CSS software 10.33																

Water to water screw inverter chiller, high efficiency, standard sound

- › High energy efficiency both at full and part load conditions
- › Compact footprint through stacked heat exchanger lay-out
- › Heat pump version with reversibility on water side (up to 62°C hot water production)
- › Multiple options available: sound proof cabinet, rapid restart, removable electrical panel, etc. to adapt the unit to your specific application and need
- › Thanks to a large operating envelope, the unit is suitable for all possible process and comfort applications
- › High efficient flooded type heat exchanger allowing maximum unit performances
- › One or two truly independent refrigerant circuits for outstanding reliability



More details and final information can be found by scanning or clicking the QR codes.



EWWS-VZXS

Cooling only/Heating only			EWWS-VZXS		450	490	600	700	780	890	C10	C12	C13	C14	C16	C17	C19	C20
Space cooling	A Condition Pdc (35°C - 27/19)		kW	441.23	493.3	605.32	704.66	783.15	888.89	1,038.67	1,178.53	1,287.26	1,390.42	1,570.18	1,725.3	1,876.17	2,045.66	
	ηs,c	%		306.4	313.6	328.4	329.2	328	328.4	328.8	331.2	326.4	329.2	331.2	326.4	323.2	326.8	
SEER				7.86	8.04	8.41	8.43	8.4	8.41	8.42	8.48	8.36	8.43	8.48	8.36	8.28	8.37	
Cooling capacity	Nom.		kW	441	493	605	705	783	889	1,039	1,179	1,287	1,390	1,570	1,725	1,876	2,046	
Power input	Cooling Nom.		kW	87.8	96.8	116.8	138.6	157.7	171.3	207.8	239.2	263.6	282.6	319.6	354.3	396.6	425.5	
Capacity control	Method			Variable														
	Minimum capacity	%		20						10								
EER				5.02	5.1	5.18	5.09	4.97	5.19	5	4.93	4.88	4.92	4.91	4.87	4.73	4.81	
IPLV				8.87	9.01	9.29	9.43	9.39	8.96	9.27	9.24	9.48	9.43	9.39	9.29		9.15	
Dimensions	Unit	Height	mm	2,135		2,123	2,235		2,487		2,296		2,301	2,350	2,500	2,469	2,493	
		Width	mm		1,178		1,179	1,189		1,303		1,484	1,639	1,579	1,580	1,610	1,704	1,769
		Depth	mm	3,722		3,750	3,690		3,822		4,792		4,508		4,750		4,874	
Weight	Unit		kg	2,968	2,911	3,102	3,470	3,451	4,257	4,552	5,860	6,240	6,520	6,920	7,530	7,790	8,670	
	Operation weight		kg	3,098	3,006	3,274	3,648	3,611	4,518	4,860	6,370	6,760	7,130	7,530	8,300	8,560	9,630	
Water heat exchanger - evaporator	Type			Flooded shell and tube														
	Water volume	l	70	88	136		134		168	199	270		320		380		480	
	Water flow rate	l/s	21.2	23.6	29		33.7	37.5	42.6	49.7	56.4	61.6	66.5	75.2	82.6	89.7	97.9	
	Water pressure drop	kPa	91	64	61	65	57	69	60	53	64	53	68	59	50	60		
	Type			Flooded Shell & Tube														
Water heat exchanger - condenser	Water volume	l	81	92	126	145	126	217	241	240	250		290		390	290	480	
	Water flow rate	l/s	25.8	28.7	34.5	40.4	45.1	50.8	59.8	68	74.4		80.2	90.7	99.8	108	118	
	Water pressure drop	kPa	31	27	22	20	24		25		28		21	32	27	36	27	
	Type			Driven vapour compressor														
Compressor	Quantity			1						2								
	Sound power level Cooling Nom.	dBA	97	99	101		105		107	106		107		108	109	110		
Sound pressure level	Cooling Nom.	dBA	78	80	82		86		88	87		88		89		90		
Refrigerant	Type/GWP			R-513A/631														
	Charge	kg	95		130	110	170	210	185	250	260		290		320		350	
	Circuits Quantity			1						2								
Piping connections		mm	139.7				168.3				219.1				273			
		mm	168.3				219.1				168.3/219.1				219.1			

performances according to CSS software 10.33

Water to water screw inverter chiller, premium efficiency, standard sound

- › Premium energy efficiency both at full and part load conditions
- › Compact footprint through stacked heat exchanger lay-out
- › Heat pump version with reversibility on water side (up to 62°C hot water production)
- › Multiple options available: sound proof cabinet, rapid restart, removable electrical panel, etc. to adapt the unit to your specific application and need
- › Thanks to a large operating envelope, the unit is suitable for all possible process and comfort applications
- › High efficient flooded type heat exchanger allowing maximum unit performances
- › One or two truly independent refrigerant circuits for outstanding reliability



More details and final information
can be found by scanning or
clicking the QR codes.



EWWS-VZPS

Cooling only/Heating only		EWWS-VZPS		500	710	900	C12	C16	C17	
Space cooling		A Condition Pdc (35°C - 27/19)		kW	500.08	710.08	898.24	1,187.65	1,585.78	1,735.47
ηs,c		% 8.24		%	321.6	334	335.2	336.4	330	8.45
SEER		Nom.		kW	500	710	898	1,188	1,586	1,735
Cooling capacity		Nom.		kW	91.3	133.8	165.1	235.4	313.7	350.7
Power input		Cooling Nom.		kW						
Capacity control		Method			Variable					
		Minimum capacity		%	20				10	
EER					5.48	5.31	5.44	5.05		4.95
IPLV					9.13	9.48	9.17	9.36	9.48	9.4
Dimensions	Unit	Height		mm	2,108	2,430	2,487	2,302	2,500	2,493
		Width		mm	1,179	1,287	1,303	1,579	1,610	1,769
		Depth		mm	3,750	3,822		4,508	4,750	4,874
Weight	Unit	kg		kg	3,247	4,082	4,346	6,310	7,530	8,250
		Operation weight		kg	3,375	4,349	4,660	6,900	8,300	9,200
Water heat exchanger - evaporator	Type		Flooded shell and tube							
	Water volume		l	96	168	199	320	380	480	
	Water flow rate		l/s	23.9	34	43	56.8	75.8	83	
	Water pressure drop		kPa	57	44	46	39	50	42	
	Type		Flooded Shell & Tube							
Water heat exchanger - condenser	Water volume		l	126	217	241	270	390	470	
	Water flow rate		l/s	28.9	40.6	51.1	68.3	91.1	100	
	Water pressure drop		kPa	16	17	19	21		27	
	Type		Driven vapour compressor							
Compressor		Quantity			1			2		
Sound power level	Cooling Nom.	dBA	99		105		106	107	109	
Sound pressure level	Cooling Nom.	dBA	80		86		87	88	89	
Refrigerant	Type/GWP		R-513A/631							
	Charge		kg	130	180		190	320	350	
	Circuits	Quantity			1			2		
Piping connections		mm	139.7			219.1			273	
Performances according to CSS software 10.33										





Water cooled scroll heat pump

- › One of the most compact units on the market: 600mm x 600mm x 600mm
- › Low energy consumption
- › Low operating sound level
- › Easy installation and maintenance
- › Stainless steel plate heat exchanger
- › Low refrigerant volume
- › Standard integrated: pressure ports, flow switch, filter, shut-off valves and air purge
- › Advanced µC²SE controller for direct connection to a Modbus based BMS or to a remote user interface



More details and final information
can be found by scanning or
clicking the QR codes.



EWLQ-KC

Cooling Only			EWLQ-KC	014	025	033	049	064
Cooling capacity	Nom.	kW	12.09	19.87	28.90	39.35	57.84	
Power input	Cooling Nom.	kW	3.74	6.11	8.43	12.03	16.41	
Capacity control	Method					Fixed		
	Minimum capacity	%		100			50	
EER			3.237	3.254	3.429	3.27	3.524	
Dimensions	Unit	Height	mm		600			
		Width	mm		600			
		Depth	mm	600			1,200	
Weight	Unit	kg	62	124	130	238	249	
	Operation weight	kg	70	129	135	247	258	
Water heat exchanger - evaporator	Type			Brazed plate				
	Water volume	l	1.47	1.96	2.74	4.47	5.88	
	Water flow rate	Cooling Nom.	l/s	0.576	0.947	1.378	1.876	2.757
	Water pressure drop	Cooling Nom.	kPa	9.71	16.4	21.6	20.5	34.8
	Type			Scroll compressor				
Compressor	Quantity			1		2		
	Sound power level	Cooling Nom.	dBA	69.0	76.0	72.0	79.0	
Sound pressure level	Cooling Nom.	dBA		55.2	62.1	57.6	64.6	
Operation range	Evaporator Cooling	Min.~Max.	°CDB		-10 ~20			
	Condenser Heating	Min.~Max.	°CDB		20 ~55			
Refrigerant	Type/GWP			R-410A/2,088.0				
	Charge	kg		0.0				
	Circuits	Quantity		1		2		
Piping connections			Evaporator water inlet/outlet (OD)	G1"		G1" 1/2		
Unit	Starting current	Max	A	57.4	109.3	124.3	124.8	143.6
	Running current	Cooling Nom.	A	6.57	10.5	14.1	20.9	28.1
	current	Max	A	9.16	15.5	19.3	31.0	38.7
Power supply	Phase/Frequency/Voltage	Hz/V		3N~/50 /400				

Condenserless multi-scroll chiller, standard efficiency, standard sound

- › Single refrigerant circuit (2 scroll compressors) with single evaporator
- › For chilled water production, to be combined with a remote condensing unit
- › Compact design to allow easy indoor installation or retrofit operations
- › Conceived for stacked installation of two single circuit units to reduce the footprint
- › High efficiency and reliable scroll compressor
- › Stainless steel plate heat exchanger



More details and final information
can be found by scanning or
clicking the QR codes.



EWLQ-G-SS

Cooling only			EWLQ-G-SS		090	100	120	130	150	170	190	210	240	300	360
Cooling capacity	Nom.	kW	86.5	98.4	110	125	139	160	181	206	231	290	346		
Power input	Cooling Nom.	kW	22.4	25.8	29.2	33.0	36.8	42.0	47.0	54.2	59.9	75.6	91.8		
Capacity control	Method														
	Minimum capacity	%	50.0	43.0	50.0	44.0	50.0	45.0	50.0	43.0	50.0	40.0	50.0		
EER			3.86	3.81	3.78		3.79		3.80	3.86	3.80	3.85	3.84	3.77	
Dimensions	Unit	Height	mm												1,186
		Width	mm												928
		Length	mm												2,743
Weight	Unit	kg	494	578	686	714	742	773	807	838	852	967	1,046		
	Operation weight	kg	525	615	729	760	791	826	863	901	916	1,044	1,134		
Water heat exchanger - evaporator	Type														Plate heat exchanger
	Water volume	l	6	8		10	12	13	15		17		27		34
	Water flow rate Nom.	l/s	4.2	4.7	5.3	6.0	6.7	7.7	8.7	9.8	11.1	13.9	16.6		
	Water pressure drop Cooling Nom.	kPa		44	35	29	31	33	30	38					41
Compressor	Type														Scroll compressor
	Quantity														2
Sound power level	Cooling Nom.	dBA	80.0	83.0	85.0	87.0		88.0		90.0	92.0		93.0		
Sound pressure level	Cooling Nom.	dBA	64.0	67.0	69.0	70.0		72.0		74.0	76.0		77.0		
Operation range	Evaporator Cooling	Min.-Max. °CDB							-10~15						
	Condenser Cooling	Min.-Max. °CDB							30~60						
Refrigerant	Type / GWP								R-410A / 2,087.5						
	Circuits Quantity								1						
Piping connections	Evaporator water inlet/outlet (OD)			1" 1/2				2" 1/2							3"
Unit	Starting current Max	A	204	255	261	308	316	354	368	466	481.0	640	677		
	Running current Cooling Nom.	A	39	42	45	51	57	64	70	81	88	111	135		
	Max	A	59	66	72	80	88	102	116	131	145	183	221		
Power supply	Phase/Frequency/Voltage	Hz/V						3~/50/400							

Condenserless multi-scroll chiller, standard efficiency, standard sound

- › Dual refrigerant circuit (4 scroll compressors) with single evaporator
- › For chilled water production, to be combined with a remote condensing unit
- › Compact design to allow easy indoor installation or retrofit operations
- › High efficiency and reliable scroll compressor
- › Stainless steel plate heat exchanger



More details and final information
can be found by scanning or
clicking the QR codes.




EWLQ-L-SS

Cooling only			EWLQ-L-SS	180	205	230	260	290	330	380	430	480	540	600	660	720			
Cooling capacity			Nom.	kW	173	197	224	249	279	317	361	409	459	511	571	624	676		
Power input			Cooling Nom.	kW	44.3	51.1	57.9	65.6	73.2	83.8	93.5	108	119	135	152	168	184		
Capacity control			Method		Step														
			Minimum capacity	%	25.0	21.0	25.0	22.0	25.0	23.0	25.0	21.0	25.0	22.0	20.0	18.0	25.0		
EER					3.91	3.86	3.87	3.79	3.81	3.78	3.86	3.79	3.84	3.78	3.76	3.71	3.67		
Dimensions	Unit	Height	mm		1,970								2,090	2,210					
		Width	mm		928														
		Length	mm		2,801														
Weight	Unit	kg	832	1,007	1,202	1,252	1,333	1,380	1,432	1,511	1,560	1,609	1,694	1,833	1,957				
		kg	894	1,081	1,292	1,345	1,436	1,486	1,547	1,638	1,690	1,741	1,844	1,990	2,120				
Water heat exchanger - evaporator	Type		Plate heat exchanger																
	Water volume	l	19	22	29	35	41	49							62				
	Water flow rate	Nom.	l/s	8.3	9.5	10.7	11.9	13.4	15.2	17.3	19.6	21.9	24.5	27.3	29.9	32.4			
	Water pressure drop	Cooling	Nom.	kPa	25	20	25	22	29	36	45	44	52	62					
Compressor	Type		Scroll compressor																
	Quantity		4																
Sound power level	Cooling	Nom.	dBA	83.0	86.0	88.0	90.0	91.0	93.0	95.0					96.0				
Sound pressure level	Cooling	Nom.	dBA	65.0	68.0	70.0	72.0	74.0	73.0	76.0	77.0				78.0				
Operation range	Evaporator	Cooling	Min.-Max.	°CDB	-10~15														
	Condenser	Cooling	Min.-Max.	°CDB	30~60														
Refrigerant	Type / GWP				R-410A / 2,087.5														
	Circuits	Quantity			2														
Piping connections	Evaporator water inlet/outlet (OD)				3"														
Unit	Starting current	Max	A	263	320	333	388	403	456	484	597	626	785	822	860	898			
	Running current	Cooling Nom.	A	78	84	90	102	114	128	141	161	176	199	223	246	269			
		Max	A	118	131	144	160	175	205	232	262	290	328	366	403	441			
Power supply	Phase/Frequency/Voltage				3~/50/400														

Condenserless screw chiller, standard efficiency, standard sound

- › Compact design to allow easy indoor installation or retrofit operations
- › Daikin semi-hermetic single screw stepless compressor
- › High energy efficiency both at full and part load conditions
- › Chilled water temperatures down to -10°C on standard unit
- › Optimised for use with R-134a
- › MicroTech 4 controller with superior control logic and easy interface

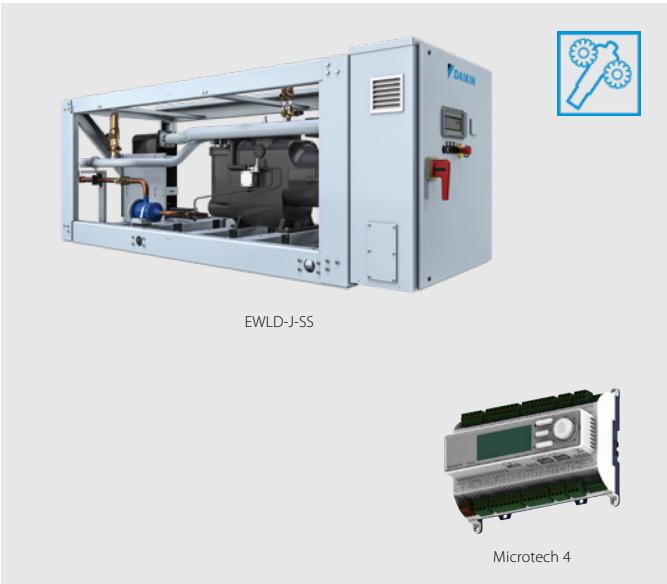

More details and final information
can be found by scanning or
clicking the QR codes.



EWLD-J-SS

			EWLD-J-SS	110	130	145	165	195	235	265
Cooling capacity	Nom.	kW	110	128	142	163	191	236	264	
Power input	Cooling Nom.	kW	31.2	38.4	43.8	50.4	56.0	66.0	75.3	
Capacity control	Method					Stepless				
	Minimum capacity	%				25.0				
EER			3.51	3.33	3.25	3.24	3.42	3.58	3.51	
Dimensions	Unit	Height	mm			1,020				
		Width	mm			913				
		Length	mm			2,684				
Weight	Unit	kg	1,124	1,141	1,237	1,263	1,305	1,489	1,489	
		kg	1,138	1,159	1,253	1,281	1,327	1,518	1,518	
Water heat exchanger - evaporator	Type				Plate heat exchanger					
	Water volume	l	14	18	14	17	20	26	26	
	Water flow rate Nom.	l/s	5.2	6.1	6.8	7.8	9.2	11.3	12.6	
	Water pressure drop Cooling Nom.	kPa	14	13	39	37	33	26	32	
Compressor	Type				Single screw compressor					
	Quantity				1					
Sound power level	Cooling Nom.	dBA				89.0				
Sound pressure level	Cooling Nom.	dBA				79.0				
Operation range	Evaporator	Cooling Min.-Max.	°CDB			-10~15				
	Condenser	Cooling Min.-Max.	°CDB			25~60				
Refrigerant	Type / GWP				R-134a / 1,430					
	Circuits	Quantity			1					
Piping connections					76.2 mm					
Unit	Evaporator water inlet/outlet (OD)									
	Maximum starting current	A	153		197		197	290	290	
	Nominal running current (RLA) Cooling	A	52	62	72	81	91	107	120	
Power supply	Maximum running current	A	85	103	114	130	154	168	201	
	Phase/Frequency/Voltage	Hz/V			3~/50/400					

performances according to CSS software 10.34

Condenserless screw chiller, standard efficiency, standard sound

- › HFO R-1234ze(E) Refrigerant with Ozone Depletion Potential equal to zero and extremely low Global Warming Potential
- › Daikin semi-hermetic single screw compressor
- › Direct expansion plate to plate evaporator
- › Shell and tube condenser
- › Silver efficiency and standard sound
- › Upgrade to new MicroTech 4 controller



More details and final information
can be found by scanning or
clicking the QR codes.




EWLH-J-SS

			EWLH-J-SS	080	100	110	130	140	170	190
Cooling capacity	Nom.	kW	84	102	109	127	143	174	193	
Power input	Cooling Nom.	kW	23.3	28.1	31.8	37	41.5	49.6	56.3	
Capacity control	Method						Stepless			
	Minimum capacity	%					25			
EER				3.62		3.43	3.42	3.43	3.51	3.43
Dimensions	Unit	Height	mm				1,020			
		Width	mm				913			
		Length	mm				2,684			
Weight	Unit	kg	1,124	1,141	1,237	1,263	1,305		1,489	
	Operation weight	kg	1,138	1,159	1,253	1,281	1,327		1,518	
Water heat exchanger - evaporator	Type					Plate heat exchanger				
	Water volume	l	14	18	14	17	20		26	
	Water flow rate	l/s	4	4.9	5.2	6	6.8	8.3	9.2	
	Water pressure drop	kPa	9.7	9.9	17.5	17.6	16.2	15.5	18.7	
Compressor	Type					Single screw compressor				
	Quantity					1				
Sound power level	Cooling Nom.	dBA				88.9				
Sound pressure level	Cooling Nom.	dBA				79				
Refrigerant	Type					R-1234(ze)				
	Circuits	Quantity				1				
Piping connections		mm				76.2				
Unit	Starting current	A		153			197			290
	Running current	A	42	48	59	65	72	84	92	
	Max	A	75	90	100	114	143	158	178	
Power supply	Phase/Frequency/Voltage	Hz/V				3~/50/400				

performances according to CSS software 10.34

Condenserless screw chiller, standard efficiency, standard sound

- › Refrigerant R-513A
- › Daikin semi-hermetic single screw compressor
- › Direct expansion plate to plate evaporator
- › Shell and tube condenser
- › Silver efficiency and standard sound
- › Upgrade to new MicroTech 4 controller

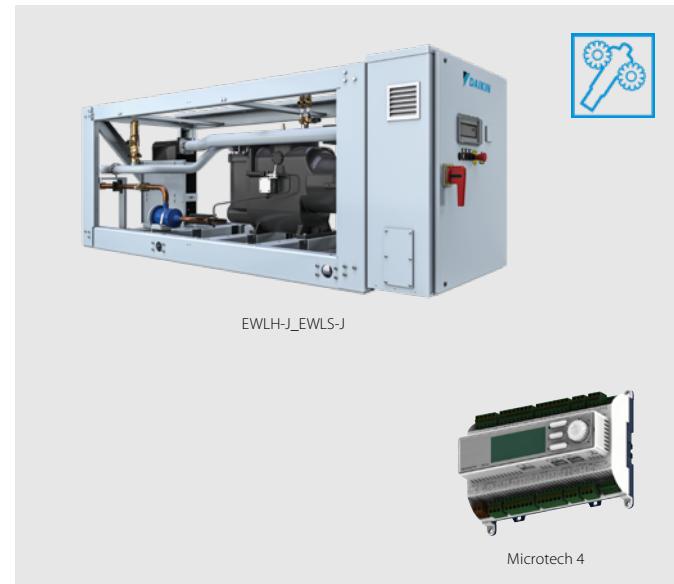

More details and final information
can be found by scanning or
clicking the QR codes.



EWLS-J-SS

	EWLS-J-SS		110	130	150	170	200	240	270
Cooling capacity	Nom.	kW	111	132	150	175	200	236	268
Power input	Cooling Nom.	kW	32.2	38.7	44.8	51.2	58.2	69.4	78.8
Capacity control	Method				Stepless				
	Minimum capacity	%			25				
EER			3.44	3.4	3.35	3.41	3.44	3.41	3.4
Dimensions	Unit	Height	mm			1,020			
		Width	mm			913			
		Length	mm			2,684			
Weight	Unit	kg	1,124	1,141	1,237	1,263	1,305	1,489	
	Operation weight	kg	1,138	1,159	1,253	1,281	1,327	1,518	
Water heat exchanger - evaporator	Type				Plate heat exchanger				
	Water volume	l	14	18	14	17	20		26
	Water flow rate	l/s	5.3	6.3	7.2	8.4	9.6	11.3	12.8
	Water pressure drop	kPa	16	15.8	31.1	31.5	30	27	33.8
Compressor	Type				Single screw compressor				
	Quantity				1				
Sound power level	Cooling Nom.	dBA			88.9				
Sound pressure level	Cooling Nom.	dBA			79				
Refrigerant	Type				R-513A				
	Circuits	Quantity			1				
Piping connections		mm			76.2				
Unit	Starting current	Max	A	154		198		291	
	Running current	Cooling Nom.	A	54	65	75	84	94	111
	Max	A	81	96	108	122	141	164	185
Power supply	Phase/Frequency/Voltage	Hz/V			3~/50/400				

performances according to CSS software 10.34

Condenserless screw chiller, standard efficiency, standard sound

- › DX shell and tube evaporator – one pass refrigerant side for easy oil circulation and return
- › Stepless single-screw compressor
- › Standard electronic expansion valve
- › Optimised for use with R-134a



More details and final information
can be found by scanning or
clicking the QR codes.



EWLD-I-SS

Cooling only		EWLD-I-SS	320	400	420	500	600	650	750	800	850	900	950	C10	C11	C12	C13	C14	C15	C16	C17		
Cooling capacity	Nom.	kW	315	374	437	509	607	670	740	802	865	935	975	1,029	1,097	1,144	1,210	1,278	1,330	1,381	1,433		
Power input	Cooling	Nom.	kW	80.3	96.0	113	134	160	175	192	208	224	246	264	283	286	302	318	336	356	375	395	
Capacity control	Method													Stepless									
	Minimum capacity	%				25.0					12.5									8.3			
EER				3.93	3.89	3.88	3.79	3.80	3.82		3.86		3.81	3.69	3.64	3.83	3.79	3.80	3.74	3.68	3.63		
Dimensions	Unit	Height	mm	1,899						2,325										2,415			
		Width	mm							1,464										2,135			
		Length	mm	3,114						4,391										4,426			
Weight	Unit	kg	1,861	1,869	1,884	3,331	3,339	3,347	3,356	3,364	3,412	5,146	5,167	5,188	5,208								
	Operation weight	kg	2,054	2,052	2,056	3,602	3,603	3,604	3,605	3,645	5,667	5,671	5,677	5,677	5,680								
Water heat exchanger - evaporator	Type			Single pass shell and tube																			
	Water volume	l	193	183	172	271	263	256	248	241	233	504	489	472	504	489	472	504	489	472			
	Water flow rate	Nom.	l/s	15.1	17.9	20.9	24.4	29.1	32.1	35.4	38.4	41.4	44.8	46.7	49.3	52.5	54.8	57.9	61.2	63.7	66.1	68.6	
	Water pressure drop	Cooling	Total	kPa	34	46	49	56	50	40	52	49	40	49	36	54	47	51	43	53	57	61	65
Compressor	Type			Single screw compressor																			
	Quantity			1						2									3				
Sound power level	Cooling	Nom.	dBA	94.0			97.0			98.0	99.0			100.0			101.0			103.0			
Sound pressure level	Cooling	Nom.	dBA	75.0	76.0		78.0			79.0	80.0			81.0		80.0		81.0			83.0		
Operation range	Evaporator	Cooling	Min.-Max.	°CDB										-8~15									
	Condenser	Cooling	Min.-Max.	°CDB										25~60									
Refrigerant	Type / GWP													R-134a / 1,430									
	Circuits	Quantity					1			2									3				
Piping connections	Evaporator water inlet/outlet (OD)													42mm									
Unit	Maximum starting current	A	330	464	493	627	650	681	703	836	867	898	920	942									
	Nominal running current (RLA) Cooling	A	131	157	181	214	260	287	313	338	361	391	420	448	470	493	517	542	571	601	631		
	Maximum running current	A	204	233	271	299	407	436	465	504	542	570	597	670	698	737	775	814	841	868	896		
Power supply	Phase/Frequency/Voltage	Hz/V												3~/50/400									



Water cooled centrifugal chiller, high efficiency, standard sound

- › No friction loss, no oil contamination, no additional oil management systems and an increased equipment life thanks to the magnetic bearing technology
- › Excellent part load efficiency
- › Totally oil-free operation resulting in reduced maintenance costs and increased reliability
- › Compact footprint through stacked heat exchanger lay-out
- › Increased installation flexibility thanks to limited dimensions
- › Easy handling: thanks to its compact size, it can easily pass through the doorway
- › MicroTech 4 controller with superior control logic and easy interface
- › A wide portfolio of options is available to meet different requirements.
- › The compressor vibration levels are extremely low as a result of the high-speed design
- › Optimized for highly efficient R134a refrigerant and compatible with next generation refrigerants

More details and final information
can be found by scanning or
clicking the QR codes.



EWWD-DZXS



Cooling Only			EWWD-DZXS		320	440	530	610	640	700	880	C10	C13	C14	C15	C21					
Space cooling	A Condition Pdc (35°C - 27/19)	kW	320.01	443.01	528	610.02	638.01	699.97	883.01	1,056	1,325.26	1,402	1,564.57	2,070.42							
	ηs,c	%	334	314	324	344	349	342	350	363	349.8	362	360.6	365.4							
SEER			8.72	8.65	9.08	8.91	8.95	8.79	8.99	9.31	8.86	9.32	9.13	9.28							
Cooling capacity	Nom.	kW	320	443	528	610	638	700	883	1,056	1,325	1,402	1,565	2,070							
Power input	Cooling Nom.	kW	66.5	88.5	102	124.7	131	126	176	205	272	256	310	391							
Capacity control	Method		Variable																		
	Minimum capacity	%	30	21	16	15	18	11	7	9	8	6									
EER			4.81	5	5.14	4.89	4.85	5.53	5.01	5.15	4.88	5.46	5.04	5.3							
ESEER			7.94	7.92	8.2	7.78	8.16	8.08	8.09	8.39	-	8.29									
IPLV			9.38	9.33	9.7	9.41	9.5	9.86	9.52	9.91	9.18	10.1	9.5	9.42							
Dimensions	Unit	Height	mm				1,865				1,985				2,200						
		Width	mm				1,055				1,160				2,083						
Weight	Unit	Length	mm				3,625				3,585				2,200						
											3,580				2,225						
Water heat exchanger - evaporator	Unit	kg	1,700	1,900	2,000	2,850	2,600	2,900	3,600	4,350	3,800	4,768	5,450	5,500							
		Operation weight	kg	1,973	2,216	2,347	3,197	3,344	3,102	3,458	4,292	5,020	4,579	5,540	6,570						
Water heat exchanger - condenser	Type		Flooded shell and tube																		
		Water volume	l	70	96	107	134	156	199	271.8	229	317.4	444.3								
		Water flow rate	Nom.	l/s	15.3	21.2	25.3	29.1	30.5	33.5	42.3	50.6	-	67.2							
		Cooling	Nom.	l/s			-					63.4	-	74.9	99.1						
Water heat exchanger - condenser	Water pressure drop	Water	Cooling	Nom.	kPa	47.4	40.6	45	59.1	51	61.3	64	60.4	60.1	74						
													61.1	71.9							
		Type	Shell and tube										Flooded	Shell & Tube	Flooded						
		Water volume	l	83	100	120	170	188	211	263	359.9	320	442.6	603.6	Shell & Tube						
Compressor	Type	Water flow rate	Nom.	l/s	18.3	25.3	30.1	35.1	36.7	39.4	50.5	60.1	-	79.1	-						
		Cooling	Nom.	l/s			-					76.1	-	89.5	117						
		Water pressure drop	Nom.	l/s									56	52.9	43						
					kPa	49.2	59.5	54.5	74	46.2	41.6	50.9	50.3		57						
Sound power level			Driven vapour compressor																		
Quantity			1		2		1		2		3		2		3						
Sound power level	Cooling	Nom.	dBA	87.9	88.9	89.9	91.1	91	91.1	92	93.3	99	94.3	100	101						
Sound pressure level	Cooling	Nom.	dBA	69.6	70.6	71.6		72.6		73.6	74.6	80	75.6	81	82						
Operation range	Evaporator	Cooling	Min.-Max.	°CDB	20~55		20~42		20~55		20~42		20~55		20~42						
Refrigerant	Type/GWP	Condenser	Cooling	Min.-Max.	°CDB							R-134a/1,430									
		Charge		kg	120		180		230		320		230		340						
		Circuits	Quantity		1																
Refrigerant charge			TCO2Eq	172				257				329		329		-					
Piping connections			mm	139.7				168.3				219.1									
Piping connections			mm	139.7				168.3				219.1									
Unit	Running current	Cooling Nom.	A	100.55	138.22	155.23	203.41	200.56	190.23	274.86	309.17	445	383.87	471.7	588						
Unit	Max		A	134	208	166		267	196	417	331	631	392	511	589						
Power supply	Phase/Frequency/Voltage			Hz/V	3~/50/400																

performances according to CSS software 10.27

Water cooled centrifugal chiller, high efficiency, standard sound

- › No friction loss, no oil contamination, no additional oil management systems and an increased equipment life thanks to the magnetic bearing technology
- › Excellent part load efficiency
- › Totally oil-free operation resulting in reduced maintenance costs and increased reliability
- › Compact footprint through stacked heat exchanger lay-out
- › Increased installation flexibility thanks to limited dimensions
- › Easy handling: thanks to its compact size, it can easily pass through the doorway
- › MicroTech 4 controller with superior control logic and easy interface
- › A wide portfolio of options is available to meet different requirements.
- › The compressor vibration levels are extremely low as a result of the high-speed design
- › Optimized for highly efficient R134a refrigerant and compatible with next generation refrigerants

More details and final information
can be found by scanning or
clicking the QR codes.



EWWD-DZXE



Cooling Only			EWWD-DZXE		340	470	570	670	680	740	950	C10	C11	C14	C15	C17	C22								
Space cooling	A Condition	Pdc (35°C - 27/19)	kW	341.01	474.02	566	670	682	741.96	946	1,038.18	1,130	1,436.52	1,477.93	1,684.76	2,172.91									
	ηs,c		%	335	316	326	345	349	346	352	339.8	365	350.6	366	359	370.2									
SEER				8.67	8.7	9.14	8.89	8.99	8.9	9.06	8.83	9.39	8.91	9.43	9.14	9.41									
Cooling capacity	Nom.		kW	341	474	566	670	682	742	946	1,038	1,130	1,437	1,478	1,685	2,173									
Power input	Cooling	Nom.	kW	69.9	93.5	108	138.4	138	131	186	210	216	288	263	329	393									
Capacity control	Method																								
	Minimum capacity		%	29	20		15		17		10		7	9	7	6									
EER				4.88	5.07	5.22	4.84	4.91	5.65	5.08	4.94	5.23	4.98	5.6	5.12	5.53									
ESEER				7.81	7.83	8.11	7.52	8	8.09	7.96	-	8.26	-	8.22	-	-									
IPLV				9.29	9.3	9.71	9.22	9.37	9.9	9.46	9.33	9.86	9.2	10.1	9.49	9.52									
Dimensions	Unit	Height	mm	1,865				1,985				2,082	2,200	2,083	2,200	2,225	2,290								
		Width	mm	1,055				1,160				1,510	1,270	1,510	1,270	1,510	1,510								
Weight	Unit	Length	mm	3,625				3,585				4,688	3,580	4,793	3,580	4,768	4,812								
Water heat exchanger - evaporator	Unit	kg	1,750	1,950	2,050	2,850	2,650	3,000	4,400	3,700	4,700	3,900	5,100	5,900											
		Operation weight	kg	2,033	2,276	2,407	3,197	3,354	3,162	3,568	4,970	4,412	5,370	4,699	5,890	6,920									
Water heat exchanger - condenser	Type			Flooded shell and tube																					
		Water volume	l	70	96	107		134	156	207.3	199	317.4	229	317.4	444.3										
		Water flow rate	l/s	16.4	22.7	27.1	32	32.7	35.6	45.3	-	54.1	-	70.9	-	-									
		Water pressure drop	kPa	54.2	46.5	51.5	71.4	58.3	68.7	73.2	61.4	68.9	70.7	82	70.7	78.9									
Water heat exchanger - condenser	Type			Shell and tube								Flooded Shell &Tube	Shell and tube	Flooded Shell &Tube	Shell and tube	Flooded Shell & Tube									
		Water volume	l	83	100	120	170	188	211	326.4	263	359.9	320	442.6	603.6										
		Water flow rate	l/s	19.6	27	32.1	38.6	39.1	41.6	53.9	-	64.1	-	83	-	-									
		Water pressure drop	kPa	56.4	68.4	62.4	90	52.9	46.7	58.3	44	57.6	66	58.5	50	62									
Compressor	Type			Driven vapour compressor																					
		Quantity		1		2		1		2		3		2		3									
Sound power level	Cooling	Nom.	dBA	87.9	88.9	89.9	91.1	91	91.1	92	98	93.3	99	94.3	100	101									
Sound pressure level	Cooling	Nom.	dBA	69.6	70.6	71.6		72.6		73.6	79	74.6	80	75.6	81	82									
Operation range	Evaporator	Cooling	Min.-Max.	°CDB	20~55				20~42				4~20												
Refrigerant	Type/GWP	Condenser	Cooling	Min.-Max.	°CDB	20~55				20~42				20~42											
						20~42				20~42				20~42											
						R-134a/1,430																			
Refrigerant	Charge	Circuits	Quantity		kg	130			120			200			350			1							
						190			200			250			400										
						400			250			420			470										
Refrigerant charge				TCO2Eq	186			172			286			-			358								
Piping connections				mm	139.7				168.3				219.1												
Piping connections				mm	139.7				168.3				219.1												
Unit	Running current	Cooling Nom.		A	105.42	144.7	162.48	212.9	210.15	196	287.44	318.3	323.53	425.9	392	496	588								
Power supply	Phase/Frequency/Voltage			Hz/V	134				208				166				267								
													196				417								
													406				331								
													631				392								
													511				589								

performances according to CSS software 10.27

Water cooled centrifugal chiller, high efficiency, standard sound

- › No friction loss, no oil contamination, no additional oil management systems and an increased equipment life thanks to the magnetic bearing technology
- › Excellent part load efficiency
- › Totally oil-free operation resulting in reduced maintenance costs and increased reliability
- › Compact footprint through stacked heat exchanger lay-out
- › HFO R1234zeE Refrigerant with Ozone Depletion Potential equal to zero and extremely low Global Warming Potential
- › Increased installation flexibility thanks to limited dimensions
- › Easy handling: thanks to its compact size, it can easily pass through the doorway
- › MicroTech 4 controller with superior control logic and easy interface
- › A wide portfolio of options is available to meet different requirements.
- › The compressor vibration levels are extremely low as a result of the high-speed design



More details and final information
can be found by scanning or
clicking the QR codes.



EWWH-DZXS



Cooling Only			EWWH-DZXS	230	320	380	430	455	460	640	755	920	945	C11	C13
Space cooling	A Condition Pdc (35°C - 27/19)	kW	227.08	318.33	376.33	455.13	454.66	474.48	637.15	752.27	917.79	945.8	1,126	1,352	
	ηs,c	%	330	346		342		339	352	354	353	360.2	359.4	364.2	
SEER			8.78	8.66	8.67	8.8	8.78	8.32	9.04	9.07	9.06	9.02	9.04	9.13	
Cooling capacity	Nom.	kW	227	318	376		455		461	637	752	918	945.8	1,126	1,352
Power input	Cooling Nom.	kW	45.6	60.5	71.4	93.3	90.6	79.3	120.5	142.1	158.8	181	216.5	237.7	
Capacity control	Method						Variable							Stepless	
	Minimum capacity	%	24	21	20	13	12	20	11		10		11	16	
EER			4.98	5.27		4.88	5.02	5.81		5.29		5.78	5.22	5.2	5.69
ESEER			7.78	7.97	7.98	7.89	8.06	7.76	8.26	8.3	8.16		-		
IPLV			9.37	9.52	9.56	9.44		9.5	9.74	9.78	9.74	9.54	9.57	9.71	
Dimensions	Unit	Height	mm	1,865			1,985			2,200		2,083	2,225	2,290	
		Width	mm	1,055			1,160			1,270			1,510		
		Length	mm	3,625			3,585			3,580		4,793	4,768	4,812	
Weight	Unit	kg	1,700	1,900	2,000	2,850		2,600	2,900	3,600	3,800	4,350	4,750	5,500	
	Operation weight	kg	1,973	2,216	2,347	3,197	3,344	3,102	3,458	4,292	4,579	5,020	5,540	6,570	
Water heat exchanger - evaporator	Type						Flooded shell and tube								
	Water volume	l	70	96		107		134		156	199	229	271.8	317.4	444.3
	Water flow rate	l/s	10.8	15.2	18	20.5	21.7	22	30.4	35.9	43.9	45.2	53.8	64.6	
	Water pressure drop	kPa	28.2	24.6	26.8	31.7	27.8	28.6	35.9	33	34.3	30		31	
Water heat exchanger - condenser	Type						Shell and tube							Flooded Shell & Tube	
	Water volume	l	83	100	120	170	188	211	263	320		359.9	442.6	603.6	
	Water flow rate	l/s	13	18.1	21.4	24.5	26.1	25.8	36.2	42.7	51.4	53.8	64.2	76	
	Water pressure drop	kPa	24	30	27	35	23	17		25	22	27	26	24	
Compressor	Type						Driven vapour compressor								
	Quantity			1		2	1		2			3			
Sound power level	Cooling Nom.	dBA	87.9	88.9	89.9	91.1	91	91.1	92	93.3	94.3	99	100	101	
Sound pressure level	Cooling Nom.	dBA	69.6	70.6	71.6		72.6		73.6	74.6	75.6	80	81	82	
Operation range	Evaporator Cooling Min.-Max.	°CDB		20~55	20~42	20~55	20~42	20~55	20~42	20~55		4~20			
	Condenser Cooling Min.-Max.	°CDB													
Refrigerant	Type/GWP						R-1234(ze)/7								
	Charge	kg		120			180		230		320	340	390		
	Circuits	Quantity					1								
Refrigerant charge		TCO2Eq				1			2			-			
Piping connections		mm		139.7			168.3				219.1	168.3		219.1	
		mm		139.7			168.3			219.1				219.1	
Unit	Running current Cooling Nom.	A	72	99	112	133	144	125	198	222	249	297.8	339.2	374.1	
Unit	Running current Max	A	95	150	123		190	142	300	246	284	451	370	448	
Power supply	Phase/Frequency/Voltage	Hz/V					3~/50/400								

performances according to CSS software 10.27

Water cooled centrifugal chiller, high efficiency, standard sound

- › No friction loss, no oil contamination, no additional oil management systems and an increased equipment life thanks to the magnetic bearing technology
- › Excellent part load efficiency
- › Totally oil-free operation resulting in reduced maintenance costs and increased reliability
- › Compact footprint through stacked heat exchanger lay-out
- › HFO R1234zeE Refrigerant with Ozone Depletion Potential equal to zero and extremely low Global Warming Potential
- › Increased installation flexibility thanks to limited dimensions
- › Easy handling: thanks to its compact size, it can easily pass through the doorway
- › MicroTech 4 controller with superior control logic and easy interface
- › A wide portfolio of options is available to meet different requirements.
- › The compressor vibration levels are extremely low as a result of the high-speed design



More details and final information
can be found by scanning or
clicking the QR codes.



EWWH-DZXE



Cooling Only		EWWH-DZXE		245	345	405	470	480	490	685	740	810	955	C10	C12	C14											
Space cooling	A Condition Pdc (35°C - 27/19)	kW	241.98	339.33	401.93	460.88	483.83	486.57	678.69	741	802.77	944.73	1,033	1,226	1,417												
	ηs,c	%	331	350	335	345	344	356	344.6	358	356		364.2		371.8												
SEER			8.85	8.75	8.79	8.94	8.4	8.9	9.18	8.8	9.22	9.15		9.17	9.35												
Cooling capacity	Nom.	kW	242	339	402	487	474	484	679	741	803	945	1,033	1,226	1,417												
Power input	Cooling Nom.	kW	47.9	63.4	75.1	98.7	79.5	95.1	126.3	144.6	149.4	159.2	192.9	229.5	238.3												
Capacity control	Method		Variable						Stepless		Variable		Stepless														
	Minimum capacity	%	24	20	19	12	20	12	10	12	9	10		11		17											
EER			5.05	5.35	4.93	5.97	5.09	5.37	5.13	5.37	5.93		5.35	5.34	5.94												
ESEER			7.78	8.02	8	7.75	7.83	8.04	8.22	-	8.27	8.23			-												
IPLV			9.33	9.54	9.58	9.36	9.56	9.43	9.74	9.44	9.79	9.8	9.62	9.65	9.72												
Dimensions	Unit	Height	mm	1,865				1,985		2,082	2,200		2,083	2,225	2,290												
		Width	mm	1,055				1,160		1,510	1,270			1,510													
		Length	mm	3,625				3,585		4,688	3,580		4,793	4,768	4,812												
Weight	Unit	kg	1,750	1,950	2,050	2,850	2,650	2,850	3,000	4,400	3,700	3,900	4,700	5,100	5,900												
	Operation weight	kg	2,033	2,276	2,407	3,197	3,162	3,354	3,568	4,970	4,412	4,699	5,370	5,890	6,920												
Water heat exchanger - evaporator	Type		Flooded shell and tube										444.3														
	Water volume	l	70	96	107		134	156	207.3	199	229		317.4														
	Water flow rate	l/s	11.6	16.2	19.2	22.4	22.6	23.1	32.4	34.9	38.4	45.2	48.7	57.9	67												
	Water pressure drop	kPa	29.7	28.4	37.8	30.8	32	41.3	31	38.1	36.9	37	38		33												
Water heat exchanger - condenser	Type		Shell and tube								Flooded Shell & Tube	Shell and tube	Flooded Shell & Tube														
	Water volume	l	83	100	120	188	170	211	326.4	263	320		359.9	442.6	603.6												
	Water flow rate	l/s	13.9	19.2	22.8	26.7	26.4	27.7	38.5	41.8	45.5	52.8	57.8	68.8	78.4												
	Water pressure drop	kPa	28	34	31	42	18	26	29	21	28	23	33	30	26												
Compressor	Type		Driven vapour compressor																								
	Quantity		1		2		1		2		3																
Sound power level	Cooling Nom.	dBA	87.9	88.9	89.9	91.1	91	92	98	93.3	94.3	99	100	101													
Sound pressure level	Cooling Nom.	dBA	69.6	70.6	71.6		72.6		73.6	79	74.6	75.6	80	81	82												
Operation range	Evaporator Cooling Min.-Max.	°CDB	20~55				20~42				4~20																
	Condenser Cooling Min.-Max.	°CDB	20~55				20~42				20~55		20~42		20~55												
Refrigerant	Type/GWP		R-1234(ze)/7																								
	Charge	kg	130			120			190			200			350												
	Circuits Quantity		1																								
Refrigerant charge		TCO2Eq	1												2												
Piping connections		mm	139.7						168.3						219.1												
		mm	139.7												219.1												
Unit	Running current Cooling Nom.	A	75	103	117	142	125	150	205	277	232	249	311		249												
Unit	Running current Max	A	95	150	123	190	142	190	300	286	246	284	451	370	448												
Power supply	Phase/Frequency/Voltage	Hz/V	3~/50/400																								

performances according to CSS software 10.27



Water cooled centrifugal chiller, high efficiency, standard sound

- › No friction loss, no oil contamination, no additional oil management systems and an increased equipment life thanks to the magnetic bearing technology
- › Excellent part load efficiency
- › Totally oil-free operation resulting in reduced maintenance costs and increased reliability
- › Compact footprint through stacked heat exchanger lay-out
- › Increased installation flexibility thanks to limited dimensions
- › Easy handling: thanks to its compact size, it can easily pass through the doorway
- › MicroTech 4 controller: sophisticated adaptive software logic for stable operating conditions
- › A wide portfolio of options is available to meet different requirements.
- › The compressor vibration levels are extremely low as a result of the high-speed design
- › Optimized for highly efficient R-513A refrigerant and compatible with next generation refrigerants



EWWS-DZXS

More details and final information
can be found by scanning or
clicking the QR codes.

Cooling Only			EWWS-DZXS		320	440	530	610	640	700	880	C10	C13	C14	C15	C21
Space cooling	A Condition	Pdc (35°C - 27/19)	kW	315.85	438.98	520.21	629.71	630.64	694.46	875.77	1,043.15	1,304.67	1,390.46	1,549.85	2,027.16	
	ηs,c	%		3.416	3.376	3.54	3.448	3.508	3.428	3.508	3.636	3.448	3.624	3.552	3.608	
SEER				8.74	8.64	9.05	8.82	8.97	8.77	8.97	9.29	8.82	9.26	9.08	9.22	
Cooling capacity	Nom.	kW	316	439	520	609	631	694	876	1,043	1,305	1,390	1,550	2,027		
Power input	Cooling Nom.	kW	67.1	90	103	126	132	127	177	205	270	257	312	384		
Capacity control	Method															
	Minimum capacity	%	30		21		16	15	18		11		7	9	8	6
EER			4.71	4.88	5.05	4.82	4.77	5.44	4.92	5.08	4.82	5.4	4.96	5.27		
IPLV			9.31	9.25	9.61	9.29	9.44	9.77	9.45	9.83	9.1	9.96	9.38	9.34		
Dimensions	Unit	Height	mm	1,865			1,985			2,200	2,083	2,200	2,225	2,290		
		Width	mm	1,055			1,160			1,270	1,510	1,270	1,270	1,510		
		Depth	mm	3,625			3,585			3,580	4,793	3,580	4,768	4,812		
Weight	Unit	kg	1,700	1,900	2,000		2,850		2,600	2,900	3,600	4,350	3,800	4,750	5,500	
	Operation weight	kg	1,973	2,216	2,347	3,197	3,344	3,102	3,458	4,292	5,020	4,579	5,540	6,570		
Water heat exchanger - evaporator	Type															
	Water volume	l	70	96		107		134		156	199	272	229	317	444	
	Water flow rate	l/s	15.3	21.3	25.2	29.1	30.6	33.7	42.5	50.5	63.1	67.4	75	98.1		
	Water pressure drop	kPa	47.3	40.9	44.8	59.1	51.1	61.7	64.5	59.3	59.5	74.4	61.3	70.4		
Water heat exchanger - condenser	Type															
	Water volume	l	83	100		120		170	188	211	263	360	320	443	604	
	Water flow rate	l/s	18.4	25.4	30.1	34.9	36.8	39.6	50.8	60.2	75.9	79.5	89.9	116		
	Water pressure drop	kPa	49.4	60.4	54.5	74.2	46.5	42.1	51.5	50.4	56.1	53.4	43.7	55.7		
Compressor	Type															
	Quantity			1		2	1		2		3	2		3		
Sound power level	Cooling Nom.	dBA	87.9	88.9	89.9	91.1	91.0	91.1	92.0	93.3	93.5	94.3	94.8	95.8		
Sound pressure level	Cooling Nom.	dBA	69.6	70.6	71.6		72.6		73.6	74.6	73.9	75.6	75.2	76.2		
Refrigerant	Type/GWP									R-513A/631						
	Charge	kg	120	150	120	140	190	180	200	230	240	230		270		
	Circuits	Quantity								1						
Piping connections			mm	139.7				168.3				219.1				
			mm	139.7				168.3				219.1				

Water cooled centrifugal chiller, high efficiency, standard sound

- › No friction loss, no oil contamination, no additional oil management systems and an increased equipment life thanks to the magnetic bearing technology
- › Excellent part load efficiency
- › Totally oil-free operation resulting in reduced maintenance costs and increased reliability
- › Compact footprint through stacked heat exchanger lay-out
- › Increased installation flexibility thanks to limited dimensions
- › Easy handling: thanks to its compact size, it can easily pass through the doorway
- › MicroTech 4 controller: sophisticated adaptive software logic for stable operating conditions
- › A wide portfolio of options is available to meet different requirements.
- › The compressor vibration levels are extremely low as a result of the high-speed design
- › Optimized for highly efficient R-513A refrigerant and compatible with next generation refrigerants



EWWS-DZ

Microtech 4




EWWS-DZXE

More details and final information
can be found by scanning or
clicking the QR codes.

Cooling Only			EWWS-DZXE	340	470	570	670	680	740	950	C10	C11	C14	C15	C17	C22
Space cooling	A Condition Pdc (35°C -27/19)	kW	336.72	471.24	558.03	676.76	674.49	728.69	941.72	1,024.55	1,117.07	1,419.67	1,450.66	1,652.82	2,128.56	
	ηs,c	%	3.428	3.396	3.568	3.452	3.52	3.464	3.532	3.444	3.664	3.464	3.668	3.556	3.656	
SEER			8.77	8.69	9.12	8.83	9	8.86	9.03	8.81	9.36	8.86	9.37	9.09	9.34	
Cooling capacity	Nom.	kW	337	471	558	671	674	729	942	1,025	1,117	1,420	1,451	1,653	2,129	
Power input	Cooling Nom.	kW	70.2	95.1	108		139		129	188	209	215	287	259	324	385
Capacity control	Method															
	Minimum capacity	%	29	20	15	17		10		7	9	7	6			
EER			4.8	4.96	5.15	4.8	4.85	5.61	5.01	4.89	5.18	4.94	5.6	5.1	5.52	
IPLV			9.22	9.2	9.59	9.11	9.31	9.78	9.38	9.25	9.81	9.12	9.98	9.4	9.41	
Dimensions	Unit	Height	mm	1,865			1,985		2,082	2,200	2,083	2,200	2,225	2,290		
		Width	mm	1,055			1,160		1,510	1,270	1,510	1,270	1,510			
		Depth	mm		3,625		3,585		4,688	3,580	4,793	3,580	4,768	4,812		
Weight	Unit	kg	1,750	1,950	2,050	2,850	2,650	3,000	4,400	3,700	4,700	3,900	5,100	5,900		
	Operation weight	kg	2,033	2,276	2,407	3,197	3,354	3,162	3,568	4,970	4,412	5,370	4,699	5,890	6,920	
Water heat exchanger - evaporator	Type															
	Water volume	l	70	96	107	134	156	207	199	272	229	317	444			
	Water flow rate	l/s	16.3	22.9	27	32	32.7	35.3	45.6	49.6	54.1	68.8	70.3	80.1	102	
	Water pressure drop	kPa	54.1	47.2	51.3	71.4	58.3	67.8	74.1	61.2	67.7	70.6	80.8	69.7	77.4	
Water heat exchanger - condenser	Type															
	Water volume	l	83	100	120	170	188	211	326	263	360	320	443	604		
	Water flow rate	l/s	19.6	27.3	32.1	38.4	39.2	41.4	54.4	59.5	64.2	82.3	82.5	95.5	121	
	Water pressure drop	kPa	56.5	69.8	62.4	90.8	53.2	46.1	59.4	43.6	57.7	66.4	57.7	49.5	60.7	
Compressor	Type															
	Quantity		1		2	1	2	3	2	3	2		3			
Sound power level	Cooling Nom.	dBA	87.9	88.9	89.9	91.1	91.0	91.1	92.0	92.6	93.3	93.5	94.3	94.8	95.8	
Sound pressure level	Cooling Nom.	dBA	69.6	70.6	71.6		72.6		73.6	73	74.6	73.9	75.6	75.2	76.2	
Refrigerant	Type/GWP								R-513A/631							
	Charge	kg	160	130	200	190	200	270	250	270	250	300	355			
	Circuits Quantity								1							
Piping connections	mm		139.7			168.3					219.1					
	mm		139.7			168.3					219.1					

Water cooled centrifugal chiller, high efficiency, standard sound

- › Single Compressor chiller
- › High part load efficiency with Daikin VFD Unit Mounted - Refrigerant Cooled
- › Low Harmonics VFD option
- › Excellent Full Load performance
- › Unloading down to 10% without Hot Gas By Pass
- › Refrigerant flexibility with R-134a, R-1234ze and R-513A
- › Reduced refrigerant quantity
- › Touch screen operator panel
- › Unit mounted control panel
- › Rapid restart for fast start-up after power loss
- › Heat pump mode

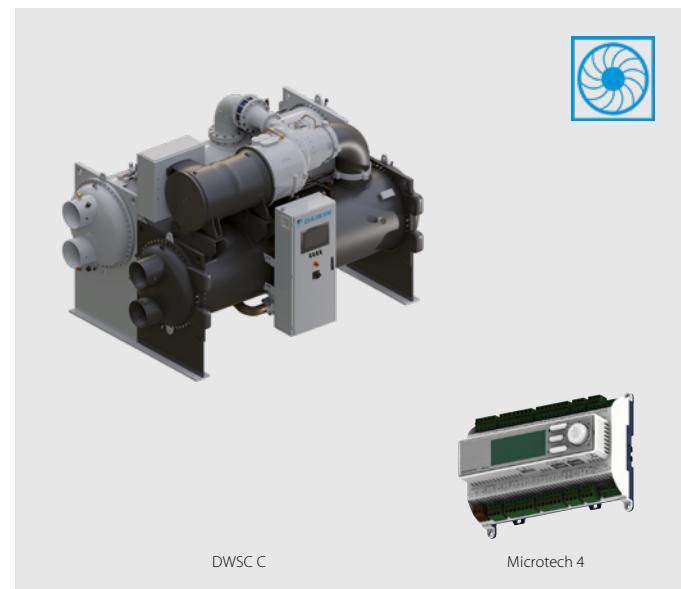

Daikin Centrifugal Compressor

- › No compromises in application flexibility
- › Proven compressor technology
(Daikin centrifugal compressor design)



Rapid restart for fast start-up after power loss

The UPS keeps the controller switched on enabling the unit to quickly reach the full load. Focused on data center and all applications where the cooling capacity supply is crucial.



Reduced refrigerant quantity

Thanks to the new high efficiency tubes and more compact heat exchanger design.



Heat pump mode

With reversibility on water side whenever a heating load is demanded thus improving suitability for applications with changing load during the year.

More details and final information can be found by scanning or clicking the QR codes.



DWSC-C

Cooling Only	DWSC C	DWSC C	DWSC C
Cooling capacity	Min./Max.	kW	1,050 (1)/4,500 (1)
Compressor	Type		Single stage centrifugal compressor
Refrigerant	Type		R-134a / R-513A
Power supply	Frequency	Hz	50/60

(1) AHRI conditions

Water cooled centrifugal chiller, high efficiency, standard sound

- › Lower equipment, installation and annual operating costs than two single compressor chillers
- › Main components can be removed or repaired without shutting down the unit as the chiller has two of everything (compressors, lubrication systems, control systems and starters)
- › Compact design for small footprint and minimized installation space
- › Unloading to 5% of full load provides improved stability of the chilled water temperature and less harmful cycling of compressors
- › High efficiency flooded type shell and tube evaporator/ condensers



Free cooling operation

Allows to reduce the power consumption generated by traditional mechanical cooling.



Touch screen operator panel



Touch screen operator panel is graphically intuitive and easy to use for enhanced operator productivity. Important status and control information is available at a glance or a touch.

Unit mounted control panel



More details and final information can be found by scanning or clicking the QR codes.



DWDC-C

Cooling Only		DWDC C
Cooling capacity	Min./Max.	kW
Compressor	Type	
Refrigerant	Type	
Power supply	Frequency	Hz

2,100 (1)/9,000 (1)
Single stage centrifugal compressor
R-134a / R-513A / R-1234(ze)

(1)AHRI conditions

Accessories - Chillers

Panels			Air-cooled chillers							
			EWAA~BVP EWYA~BVP	EWAA~DA EWYA~DA	EWYD~BZ	EWYD~4Z	EWYT~B-	EWAH~TZB & C	EWAD~TZB & C	EWAD~T-C
EKDICMPAB	(a) (b) (c)	iCM Primary Basic								●
EKDICMPAL	(a) (b) (c)	iCM Primary for evaporator peripherals Light						●	●	●
EKDICMPAF	(a) (b) (c)	iCM Primary for evaporator peripherals Full						●	●	●
EKDICMPWL	(a) (b) (c)	iCM primary Evaporator/Condenser Light								
EKDICMPWF	(a) (b) (c)	iCM primary Evaporator/Condenser Full								
EKDICMCTL	(a) (b)	iCM Cooling towers Light								
EKDICMCTF	(a) (b)	iCM Cooling towers Full								
EKDICMPABIO	(a) (b)	iCM Primary Basic with IO third party chiller						●	●	●
EKDICMPALIO	(a) (b)	iCM Primary Evaporator Light with IO third party chiller						●	●	●
EKTSMS		Temperature sensor for master/slave configuration					●			
EKRUMCL1		User Interface	●							
Serial Cards & Communication Modules			Air-cooled chillers							
			EWAA~BVP EWYA~BVP	EWAA~DA EWYA~DA	EWYD~BZ	EWYD~4Z	EWYT~B-	EWAH~TZB & C	EWAD~TZB & C	EWAD~T-C
EKAC200J		Serial Card RS485/Modbus			●					
EKACBAC		Ethernet Card BACnet			●					
EKACLONP		Serial Card LON FTT 10			●					
EKACRS232		Serial Card RS232 Modem Interface (single unit only)			●					
EKACWEB		Web Server Card			●					
EKACBACMSTP		Serial Card BACnet MSTP			●					
EKACBACCERT		Serial Card BACnet pre-loaded IP/Ethernet (centrifugal chillers)								
EKACMSTPCERT		Serial Card BACnet pre-loaded MSTP (centrifugal chillers)								
EKCM200J		ModBus RTU communication module				●				
EKCLMON		LON communication module				●	●	●	●	●
EKCMBACMSTP		BACnet/MSTP communication module				●				
EKCMBACIP		BACnet/IP communication module				●	●	●	●	●
EKDOSMWO		Daikin on Site Modem without M2M card			●	●	●	●	●	●
Other Systems & Accessories			Air-cooled chillers							
			EWAA~BVP EWYA~BVP	EWAA~DA EWYA~DA	EWYD~BZ	EWYD~4Z	EWYT~B-	EWAH~TZB & C	EWAD~TZB & C	EWAD~T-C
EKCON		Converter RS485 to RS232			●					
EKCONUSB		Converter RS485 to USB			●					
EKMODEM		Fixed modem			●					
EKGSMOD		GSM modem			●					
EKRUPCJ		Remote display kit			●					
EKRUPCS		Local/remote display HMI				●	●	●	●	●
EKPWPROEXT		PlantWatchPro I/O extension module for hardwiring and retrofit			●					
EKGWWEB		Gateway web (Ethernet LAN SNMP)			●					
EKGWMODEM		Gateway for modem			●					
EKAC10C		Address card for connection to BMS or Remote user interface								
EKRUMCA		Remote installed user interface								
EKLS2	(d)	Low noise kit 22/28/35/45/55/65 Hp-units								
ECB2MUCW	(e)	Controller kit								
ECB3MUCW	(e)	Controller kit								
EKRPI1AHT	(g)	Digital input/output PCB								
EKRUHTB	(g)	Remote user interface								
DTA104A62	(f)	External control adapter								
BHGP26A1	(f)	Digital pressure gauge kit								
EKQDP2M016	(g)	Differential Pressure Sensor 4-20 mA 0-160 kPa						●	●	●
EKQDP2M020	(g)	Differential Pressure Sensor 4-20 mA 0-250 kPa						●	●	●
EKQDP2M040	(g)	Differential Pressure Sensor 4-20 mA 0-400 kPa						●	●	●
EKQDP2M060	(g)	Differential Pressure Sensor 4-20 mA 0-600 kPa						●	●	●
EKDAPCONT		Containerization of one unit			●	●	●	●	●	●
EKDAPSTF		Containerization of additional units in the same container			●	●	●	●	●	●

Notes:

- (a) Price **does not** include commissioning of panel; if commissioning is required please refer to RN17-041
- (b) iCM panels work in **cooling mode only**; heat pump versions, total heat recovery and Free cooling options on A/C and W/C chillers are **not compatible**
- (c) In case you are ordering iCM panels please add corresponding modbus RTU communication module (EKCM200J or EKAC200J) for each chiller unit controller
- (d) For 45/55/65 Hp-units 2 pieces are needed
- (e) Only available for modular units (EWWP~KAWIM)
- (f) Price available in SAP system
- (g) Differential pressure sensor are specific for iCM panels in variable primary flow management

Accessories - Chillers